

AUX

2023

VRF SYSTEM



Official Accounts



AUX CAC



@aux_cac_china

NINGBO AUX ELECTRIC CO.,LTD

Add: No. 1517, East Section of Yincheng Avenue, Jiangshan, Yinzhou, Ningbo, Zhejiang, P. R. China

Tel: +86-574-88220564

The above designs and specifications are subject to change without prior notice. Final specifications please refer to latest technical specification provided by sales representative.



GROUP PROFILE

Established in 2003, NINGBO AUX ELECTRIC CO.,LTD. is a professional central air-conditioner enterprise which is integrated the R & D, production, equipment manufacturing and sales service in business scope. After more than ten years business developing, it has been awarded many honors like international development advanced enterprise, innovative demonstration enterprise, most popular market brand, best product quality, most competitive brand in top ten air-conditioner supplier. The sales volume of air conditioner from 2018 to 2021 ranks top 3 in the world, and AUX has successfully been exclusive supplier of official air conditioning of the 19th Asian 2022 Hangzhou Games.

AUX product is cover unit air-conditioner, VRF and modular unit with 50 series and more than 1000 product type, its product are widely applied in government, public construction, education, medical service, decorative residential business office and industrial project, etc, and exported to more than 100 countries and regions.

In the future, AUX Group will be intelligently upgraded with the industrial intelligence, integrating home, business smart system, continue to adhere to the mission of "health, energy saving, green, environmental protection" to be a worldwide brand which symbolizes healthy life!


2022



Official exclusive supplier for the 2022 Asian Games



Intelligent Manufacturing

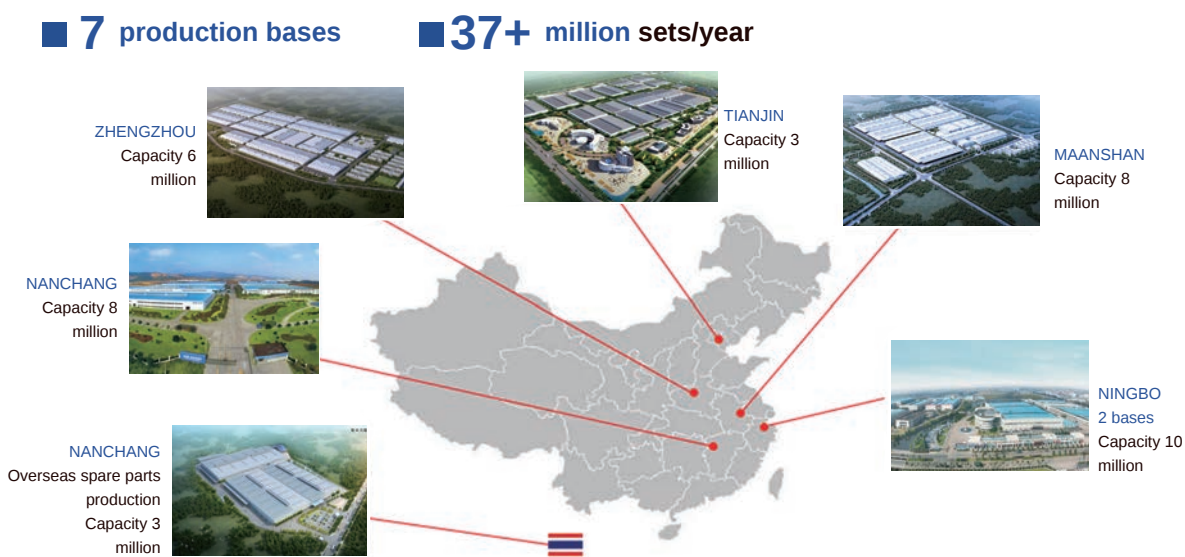

Exported to 123 countries and regions , over 400 cooperative customers




AWARDS



HONOR




CERTIFICATION

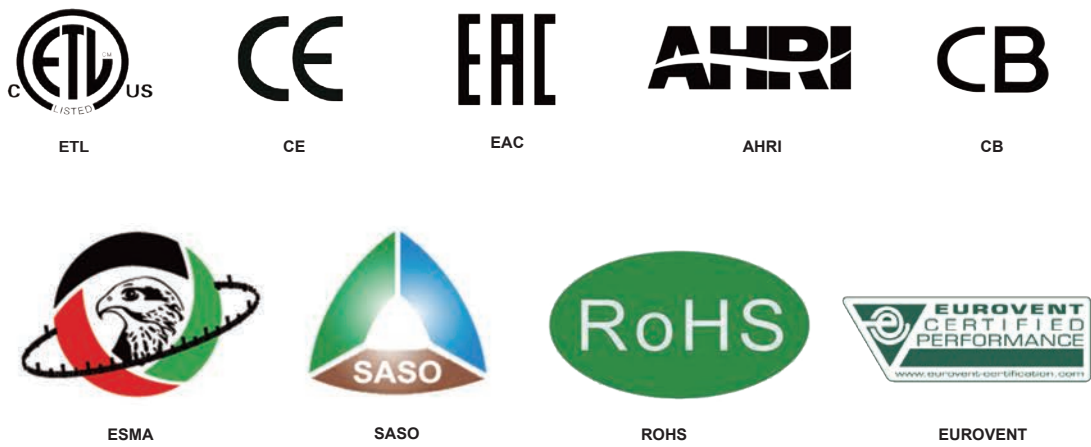

INDEX

Outdoor Unit	
ARV 7 Series	11
ARV Mini Series	41
Indoor Unit	
Cassette	47
Slim Duct	56
Mid ESP Duct	58
High ESP Duct	61
Fresh Air Processor	62
Ceiling&Floor	63
Control System	
Remote Controller	67
Wired Controller	68
Centralized Controller	71
Centralized Control Software	74
Accessories	80
HRV	
Heat Recovery Ventilator	84
Branch Pipe	
Branch Pipe	87
Project Reference	
	88

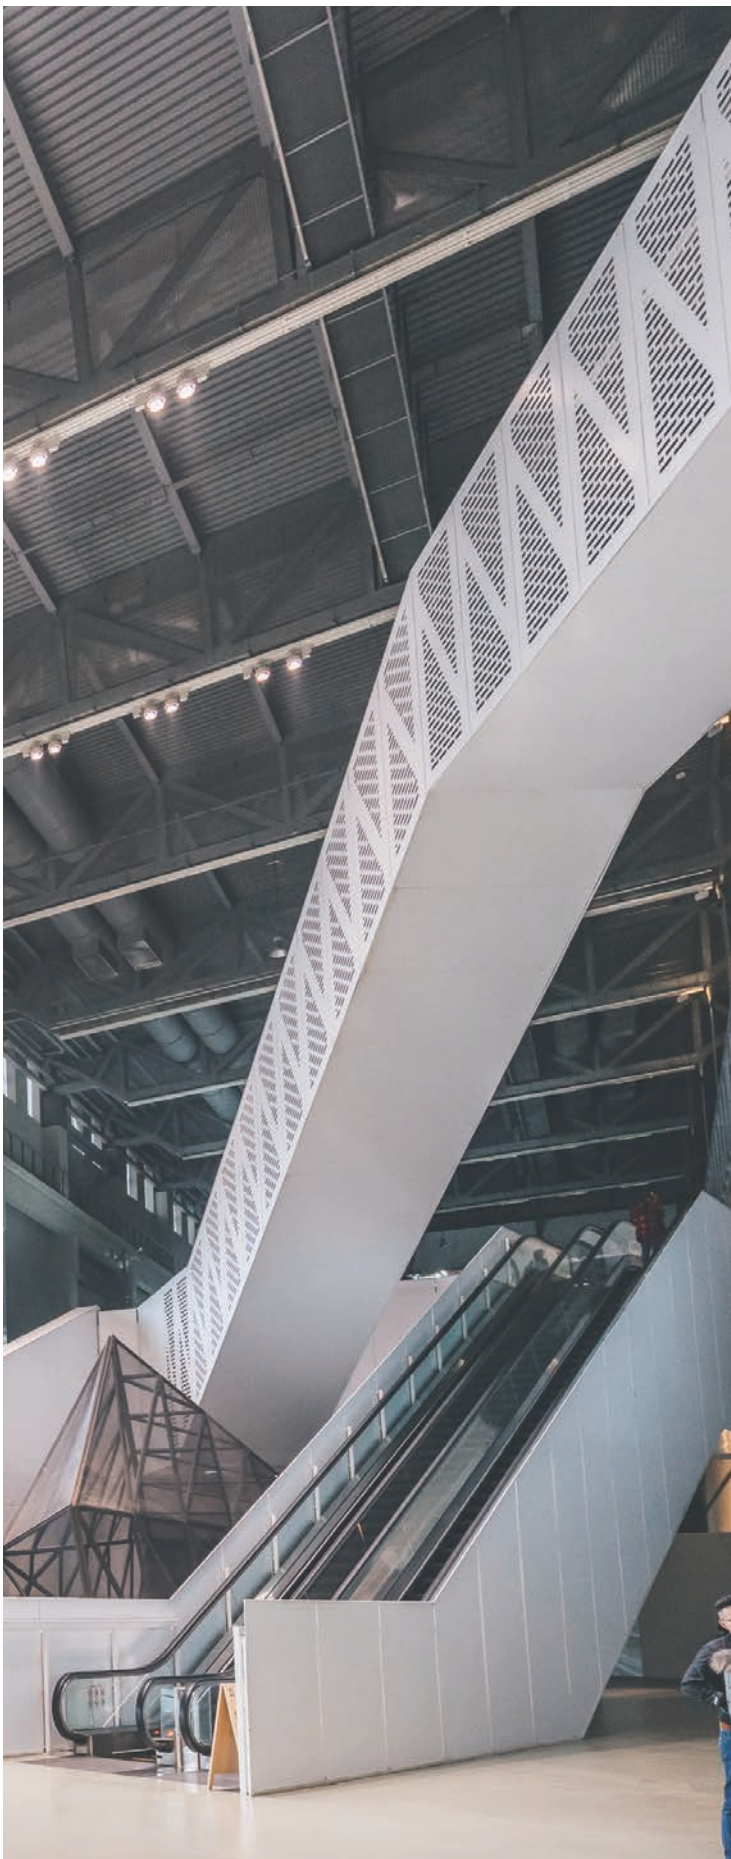

Product Lineup

Modular VRF Outdoor Unit

ARV 7: Scroll series ARV 7S: Rotary series

Capacity	(kW)	25.2	28.0	33.5	40.0	45.0	50.4	56.0	61.5	68.0	73.5	78.5	85.0	90.0	95.2	101
	(HP)	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36



8/10/12HP	14/16HP
18/20/22HP	24/26/28/30/32/34/36HP
38-72HP	74-108HP
110-144HP	

Product Lineup

Mini VRF Outdoor Unit

Capacity(kW)		8	10	12	14	16	22	26	28	Page
ARV Mini		●	●	●	●	●	●	●	●	29

Indoor Unit (DC fan motors)

Capacity(kW)	Appearance	2.2	2.8	3.6	4.5	5.6	7.1	8.0	9.0	10.0	11.2	12.5	14.0	15.0	Page
Compact Cassette			●	●	●	●									36
Cassette			●	●	●	●	●	●	●	●	●	●	●		36
Slim Duct		●	●	●	●	●	●								43
Mid ESP Duct					●	●	●	●	●	●	●	●	●	●	44
Wall-mounted		●	●	●	●	●	●								40
Ceiling&Floor					●	●	●	●	●	●	●	●	●		49
One-way Cassette			●	●	●	●	●								

Capacity(kW)	Appearance	22.0	28.0	45.0	56.0	Page
High ESP Duct		●	●			47
Fresh Air Processor		●	●	●	●	48

Indoor Unit (AC fan motors)

Capacity(kW)	Appearance	2.2	2.8	3.6	4.5	5.6	7.1	8.0	9.0	10.0	11.2	12.5	14.0	15.0	Page
Cassette							●	●	●	●	●	●	●		38
Slim Duct		●	●	●	●	●	●								40
Mid ESP Duct					●	●	●	●	●	●	●	●	●	●	43
High ESP Duct											●	●	●	●	44

AHU Kit

Mode	Appearance	ARVK-01A	ARVK-02A	Page
ARVK		●	●	65

Heat Recovery Ventilator

Air Volume(m³/h)	Appearance	200	300	400	500	600	800	1000	1500	2000	2500	3000	4000	5000	Page
HRV		●	●	●	●	●	●	●	●	●	●	●	●	●	71

Health



Fresh Air Intake

Air outside can be led into the room via a connection pipe, which keeps the indoor air fresh and healthy.



Long-term Filter

The latest long-term filter ensures better air quality. Meanwhile, the cleaning frequency has been decreased, and maintenance is also much easier.

Comfort



Anti-Cold-Air

When starting the heating operation, the fan speed is regulated automatically from the lowest speed to the preset level. This function can prevent cold air from blowing out at the beginning of the operation, which avoids the discomfort to the user.



Follow Me

Temperature sensor built in the remote control will sense its surrounding temperature, so the unit can achieve accurate and comfortable temperature control just like the air conditioner is following you.



Fast Cooling /Heating

Startup at high frequency increases cooling/heating capacity and reduces time to reach set temperature, thus you can enjoy cooling and heating in seconds.



Auto swing

Distributes cool/warm air to maximum area by moving horizontal and vertical fags automatically.



Independent Dehumidification

With the independent dehumidification function, the unit can efficiently dehumidify the room and give you more comfort.



3D Air Flow

Combine vertical and horizontal auto swing to ensure an even distribution of air fow throughout the room.



Dimmer

Press this button to shut off the display light on the front panel.



Silent

Indoor fan will run at super breeze speed and indoor noise level can be extremely low when the unit enters silent mode operation.

Reliability



Self-diagnosis Function

Once abnormal operation or parts failure happen, the unit will monitor the failures, the microcomputer of air conditioner will switch off and protect the system automatically when it happens. Meanwhile, the error or protection code will be displayed on the indoor unit.



Low Ambient Cooling

With special designed PCB, outdoor fan speed can be changed automatically according to condensation temperature. The air conditioner can run cooling operation even when the outdoor ambient temperature down to -15°C.



Intelligent Defrosting

Normal defrost function can only be operated in certain time,but AUX commercial air conditioner's intelligent defrost can start automatically according to the surrounding condition.



Compressor Heating Belt

Auxiliary heating belt can increase compressor oil temperature in winter and prevent defrosting water accumulated, which improves heat transfer efficiency.



No Frosting Chassis

The unique pipeline design makes the temperature on chassis higher than normal units, and it prevents defrosting water accumulated, which improves heat transfer efficiency and solves the drainage problem.



Golden Fin

Effectively prevent bacteria breeding and improve heat transfer efficiency. The unique anti-corrosive golden coating on the condenser can withstand the rain, salty air and other corrosive elements.



Fire-proof Electric Box

Electrical control box adopts new design, which can meet the higher fire safety requirement to prevent the internal fire due to the electric spark accident.

Energy Saving



180° Sine Wave Control

With considerable advantages, DC Inverter 180° sine wave driving technology has much wider range of frequency and voltage, higher energy efficiency, more smooth running and lower noise.



Sleep Mode

The function enables the air conditioner to automatically increase cooling or decrease heating 1°C per hour for the first 2 hours, then holds steady for the next 5 hours, after that it will switch off. This function maintains both energy saving and comfort in night.



Hydrophilic aluminum fin

The louvered hydrophilic aluminum foil has improved by more than 10%. There refrigerant inlet and outlet are separated, to ensure the sub-cooling and enhance the cooling capacity.



Full Process By DC Drive

DC control,DC Compressor,DC indoor motor, DC outdoor motor, and DC Electronic expansion valve make low noise and high efficiency.

Convenience



24-hour Timer

Users can turn on or turn off the air conditioner at any time in 24 hours with remote controller or wireless controller.



Built-in Drain Pump

The built-in pump can lift the condensing water 1200 mm upmost from the drainage pan.



Dual side Drainage

Both left and right sides of the indoor unit are possible for drainage hose connection, and it's easy for installation with this function.



Digital Tube Display

Easily for the running parameters checking and more convenient for troubleshooting, digital tube displays work status such as indoor temperature, setting temperature, the mode of operation, etc.



Remote Control

Help users to control the air conditioner easily, you can design your most comfortable settings with this controller.



Wired Control

Help users to control the air conditioner easily, the wired controller can be fixed on the wall and avoid mislaying. It's mainly used for commercial zone and makes air conditioner control more convenient.



Central Control

With the control function of weekly timer, zone (or group) setting etc., the centralized controller can control 64 units with RS 485 wire connection and the central control adapter.



WIFI Control

With the WIFI control, you can easily turn off the air conditioner outside your house via smart device. Furthermore, you can turn it on before you come back.The indoor unit filter can be taken off to wash easily and it keeps cleaning air all the time.



Washable Filter

The indoor unit filter can be taken off to wash easily and it keeps cleaning air all the time.




Auto Restart Function

If the air conditioner breaks off unexpectedly due to the power cut, it will restart with the previous setting mode automatically when the power resume.

Nomenclature

Indoor Unit

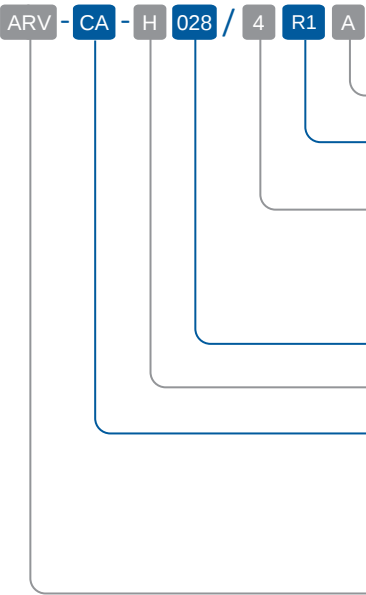

Design Series Code

Refrigerant Type:
R1: R410A.

Power Supply:
2: 220-240V~, 1Ph, 60Hz
5: 380-415V~, 3Ph, 50Hz
9: 208-230V~, 3Ph, 60Hz
S: 380-415V~, 3Ph, 50/60Hz

Cooling Capacity (×100W)

H: Cooling & Heating

Indoor Unit Type:
C1: One-Way Cassette
CA: Four-Way Cassette
SD: Slim Duct
HD: High ESP Duct
FA: Fresh Air Processor

AUX Refrigerant Variable AC


R22 Omitted

4: 220-240V~, 1Ph, 50Hz
6: 380-415V~, 3Ph, 60Hz
N: 220-240V~, 1Ph, 50/60Hz

C: Cooling Only

C2: Two-Way Cassette
CF: Ceiling&Floor
MD: Mid ESP Duct
WM: Wall-Mounted

Outdoor Unit

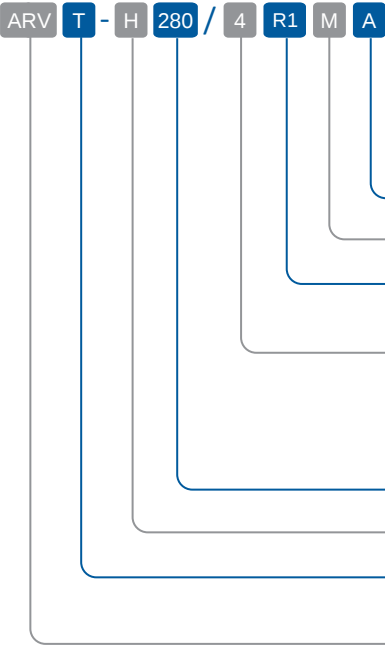

Design Series Code

M: Modular Outdoor Unit

Refrigerant Type:
R1: R410A.

Power Supply:
2: 220-240V~, 1Ph, 60Hz
5: 380-415V~, 3Ph, 50Hz
9: 208-230V~, 3Ph, 60Hz
S: 380-415V~, 3Ph, 50/60Hz

Cooling Capacity (×100W)

H: Cooling & Heating

Climate Class:
T: Tropical High Efficiency Type

AUX Refrigerant Variable AC

Non- Modular Omitted

R22 Omitted

4: 220-240V~, 1Ph, 50Hz
6: 380-415V~, 3Ph, 60Hz
N: 220-240V~, 1Ph, 50/60Hz

C: Cooling Only

ARV 7 Series

-All DC Inverter ARV System



Outdoor Units

ARV 7 / ARV 7S



VER Technology

Variable Energy-efficiency Regulation

Evaporating and condensing temperature makes strong effect to the cooling and heating performance and energy-efficiency ratio of AC system.

Thanks to VER technology, ARV7 series has various modes with different refrigerant temperature which lead the system to different performance and energy-efficiency ratio.

Cooling: 3 modes with different evaporating temperature.

Heating: 3 modes with different condensing temperature.

Turbo mode


High cooling and heating performance, cool down or warm up the room rapidly.

Basic mode

Default mode, balance the reaction speed and efficiency.

High efficiency mode

Satisfy the lowest capacity requirement and low the energy consumption.

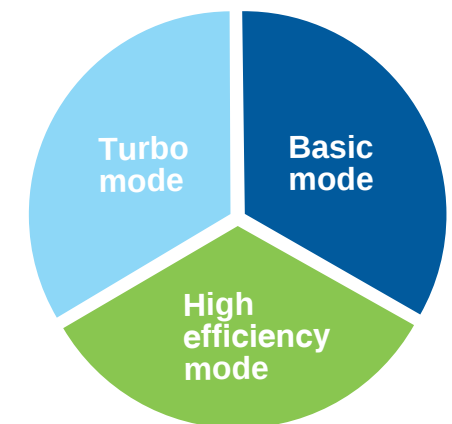


Users can choose a certain mode according to the actual need in different area and climate, so that the system can satisfy various requirement, and the seasonal efficiency can be optimized.

High Efficiency and Energy Saving

High EER And COP


ARV 7 Series achieves the industry's top class energy efficiency in cooling and heating by utilizing all DC inverter compressors, and Enhanced vapor injection.

The cooling EER is up to 4.75 and the heating COP is up to 5.48 in the 8HP category.

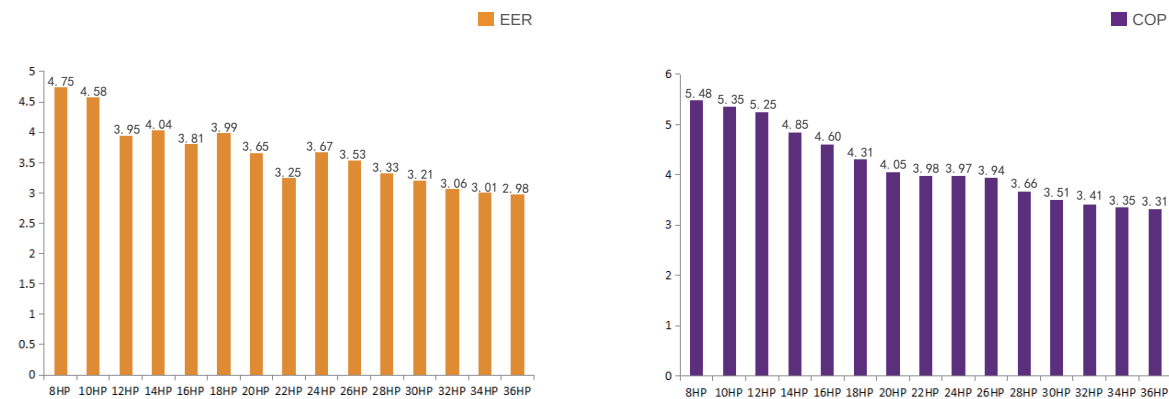


180° Sine Wave Control

DC inverter compressor users 180° sine wave vector control technique makes motor operate smooth and increases the efficiency. significantly compared with traditional sawtooth wave. It also can lower the noise level.

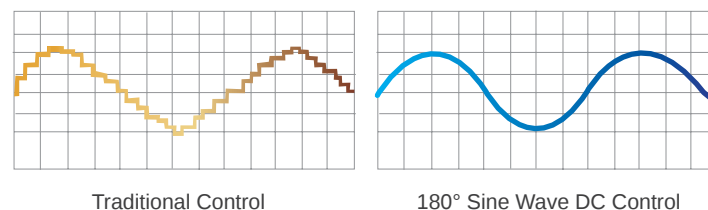

High efficiency DC fan motor

DC brushless motor adjusts the fan speed according to the system pressure, and running load to enhance the efficiency by 45%. The super aero fan provides a larger air volume and higher static pressure.

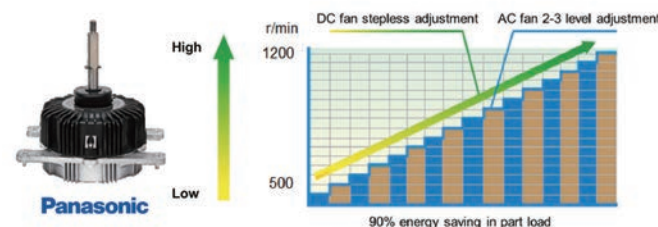

Enhanced Vapor Injection DC Inverter Compressor (Only for ARV 7)

EVI-Enhanced vapor injection

Heating condition, reducing the outlet temperature, increasing the compressor capacity, improving the heating performance.

Optimize the asymmetric vortex design

Heating condition, reducing the outlet temperature, increasing the compressor capacity, improving the heating performance.

Dynamic oil balance structure

Oil balance tube implementation parallel compressor and oil quantity dynamic equilibrium, ensuring the reliability of several parallel compressors.

High efficiency motor configuration

Using high quality material concentrated stator, cooperate with neodymium magnet rotor, having outstanding efficiency.

High pressure cavity structure

Large exhaust buffer volume, reducing the air flow noise and vibration of the runtime.

Pressure relief valve structure

Improving the partial load efficiency, adapt to the transformer ratio working condition, improving the compressor performance.

The intermediate pressure servo mechanism

According to the operation pressure among dynamic adjusting middle pressure, has realized the axial flexible, optimization of dynamic vortex disk meshing, improve product performance.

High reliability of the bearing


Adopt cylinder bearing and self-aligning ball bearing bearing group, improving the reliability of the compressor.

Internal oil circulation structure



Lubricating oil to achieve internal circulation, reducing heat loss, decreasing the rate of spitting oil, improve the efficiency and reliability.

Positive displacement gear oil pump

Positive displacement gear oil pump to ensure the high and low frequency can satisfy the oil supply, improving the reliability of the compressor.

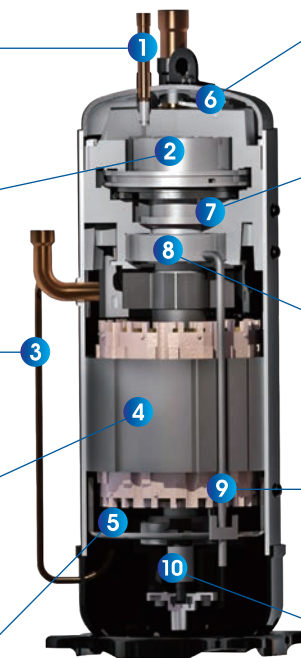


High-efficient permanent magnetic motors are installed, giving better performance than traditional DC inverter compressors.

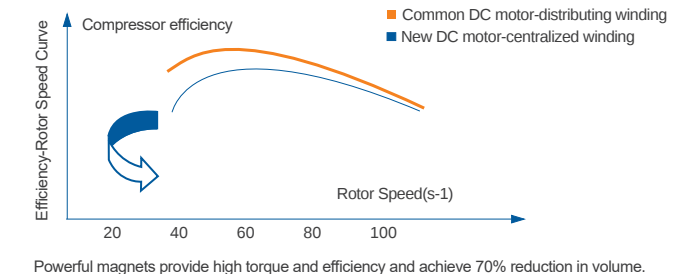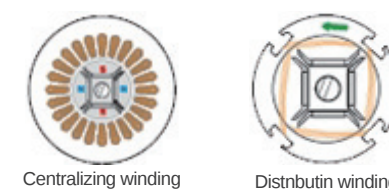


High Efficient Heat Exchanger

Optimized 2 to 1 refrigerant circuit design, increase the heat exchanging efficiency and enhance the ratio of liquid which flow to the evaporator.


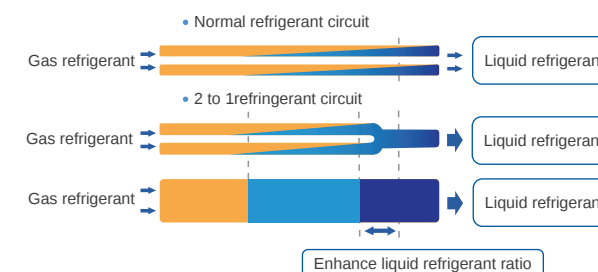


Optimized fin design, reduces the water resistance and the wind resistance.

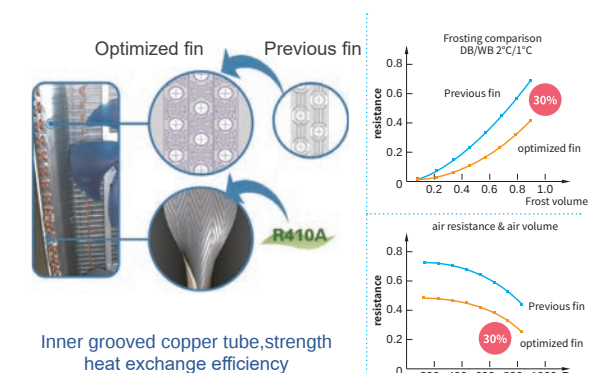

2-stage Sub-cooling Technology


The first stage sub-cooling process due to optimized refrigerant circuit and "Inverse fin type" window fin design.

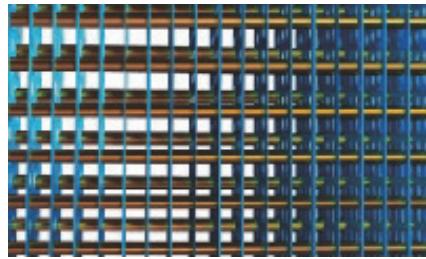

"Inverse fin type" window fin design

The second stage sub-cooling process by a high efficiency plate heat exchanger with a sub-cooling EXV.

- Low cold
- Mid cold
- High cold
- Super cold




7 Levels of Energy Management

For many projects with limited power supply, the Outdoor unit supports seven levels of output capacity restriction. It prevents tripping and keeps the Outdoor unit running during electricity supply restriction conditions.



7-Levels
Electric Restriction



4-times Anticipation Energy-saving Control Technology

Module anticipation energy-saving control technology

In partial load, intelligent judgment single operation and the efficiency of the module keep the minimum power consumption.




Compressor anticipation energy-saving adjustment technology

Control compressors quantity and operating frequency, to get higher energy efficiency ratio in partial load.




Fan anticipation energy-saving adjustment technology

Control running quantity and operating frequency, obtain higher energy efficiency ratio under partial load.

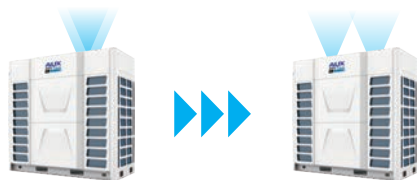

Refrigerant anticipation energy-saving technology adjustment

Adjust the opening of the electronic expansion valve, to improve the effect of condenser heat transfer, to get higher energy efficiency ratio under partial load.

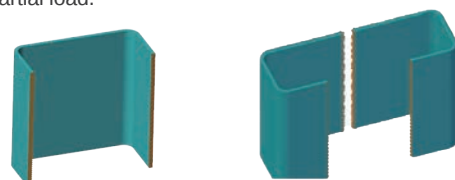

Wide Application Range

Large Capacity&Free Combination

15 basic models from 8HP to 36HP.

Maximum combination: 144HP(406kW), top level in industry.

Less quantity of system, space saving, easy installation and low cost.




Wide Operation Range

No matter in hot summer or cold winter, ARV 7 can supply comfortable environment for users.




Wide Voltage Design

In Country with unstable voltage, ARV system still could run stably.

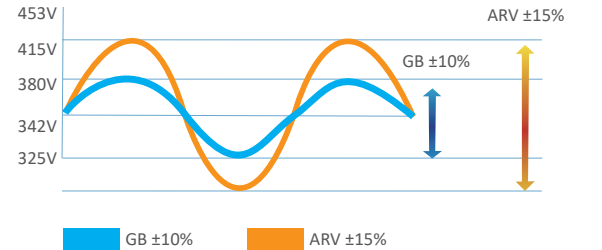

Changeable ESP

Optimized fan provide outdoor unit up to 80Pa(8-22HP),125Pa(24-36HP)static pressure. Outdoor units can be installed in the service floor or facility room.

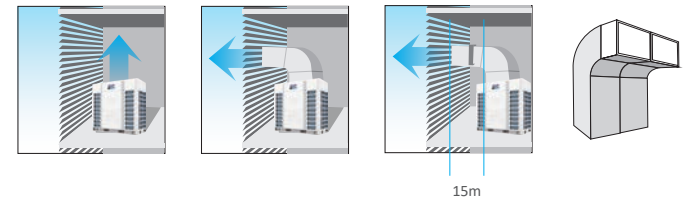

Long Piping Length

Thanks to the DC inverter control technology and sub-cooling circuit technology ,it is possible to design a system with longer piping and elevation difference which make it easier to design and installation.

Max. Total piping length — 1100m


Max.piping length between ODU and farthest IDU — 220m

Max. piping length from 1st indoor branch to the farthest indoor unit — 40m/120m*

Max. Level difference between indoor units — 40m

Max. Level difference between ODU and IDU units — 110m/130m

*The longest length after first branch is 40m as standard can be extended to up to 90m under certain conditions.Please contact your local dealer for further information.

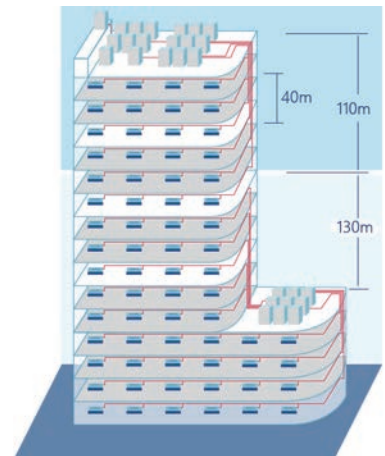


Comfortable And Healthy Environment

Silence Operation


Outdoor Unit Quiet Mode

By using optimized fan blades and the CFD(computational Fluid Dynamics) technology, the product is equipped with the night low-noise operation function. Provide more quiet operation during the night. Minimum operation noise only 45dB(A)

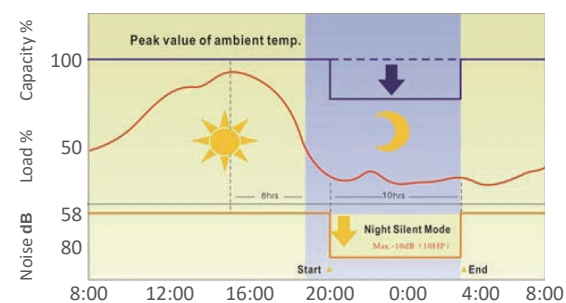

Indoor Unit Quiet Mode

Innovative centrifugal fan for large diameter and a new design of the spiral duct system equipped with high-quality motor at the same time, making the air supply more quietly and smoothly.

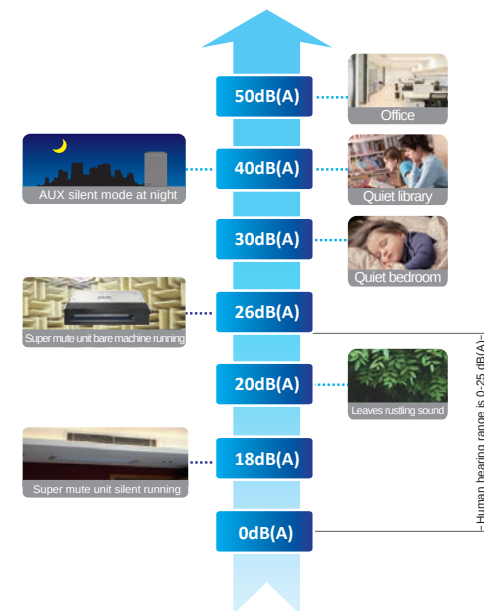


Intelligent Defrosting

Variable parameters defrost through temperature and pressure sensors, to grasp time accurately which can defrost or heat normally.


Base on the main unit and at the end of the EXV control the output, fast bolt in liquid refrigerant system, unit operation is more stable; Through the dry run, defrosting exhaust temperature higher, more complete, more conventional. The defrosting time less 3 min than others at least.

Refrigerant pipeline design to ensure outdoor heat exchanger bottom no frost during heating and ice water mixture discharge smoothly when defrosting.

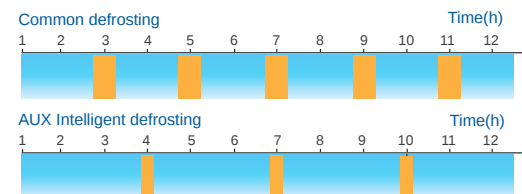


Fast Warm Up And Cool Down

The DC Inverter Compressor system reaches full load rapidly providing less temperature fluctuation and an improved living environment, bring great user experience.

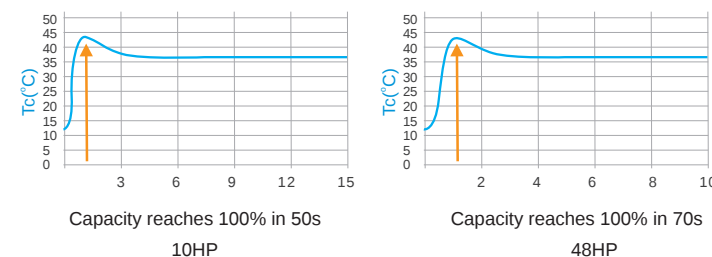


Precise Temperature Control

AUX composite temperature control technology, through the indoor/outdoor operation condition detection, adjust outdoor power output, optimize the indoor air distribution, achieve the high precision adjustment of 1°C.

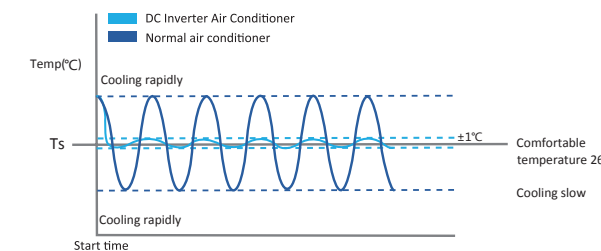

The unit uses PI calculation principle to calculate the percentage of indoor capacity demand according to indoor temperature fluctuations, to perform real-time control to the compressor operating frequency and through the double EXV adjustment, precision up to level 1000, accurately control the refrigerant flow, assure indoor comfort.

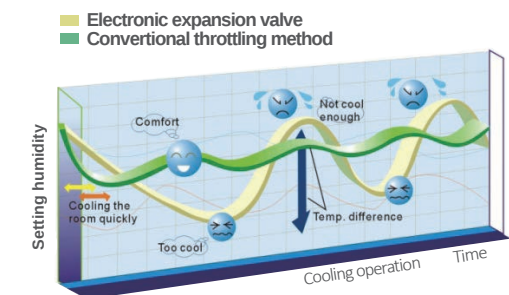



Humanization Design

VIP Function

Special VIP control function, the VIP room will decide the whole system operation mode, prior to other mode or economic locking function, ensure the priority of the important room.

Auto Restart Function

The AC can automatically memorize the operation setting when power is cut off accidentally. It can return to previous setting when power resumes. Recover the former operation state when power is restored, no need restart the unit manually

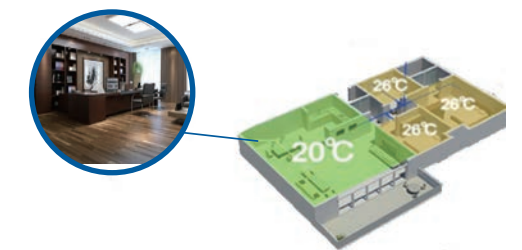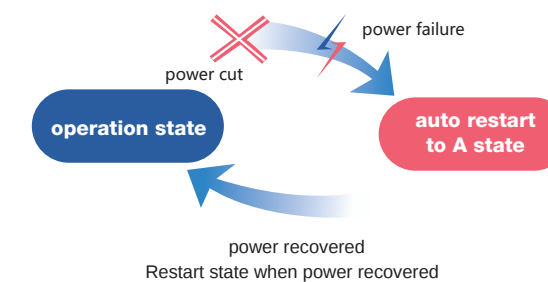

Economic Locking Function

Special design economic locking function, through outdoor PCB switch setting. If work in economic lock, AC lowest work cooling temperature will keep in 26°C and highest heating temperature keep 20°C.



Easy Installation & Maintenance


Installation space saving

The ARV 7 Series has larger capacity and smaller size, the capacity of the single unit can reach 36HP. For many large projects, the benefits of space-saving are particularly obvious.




No Oil Balance Pipe Between ODUS

High efficient oil/gas separating tech, make the system oil balance between compressors without oil balance pipe.

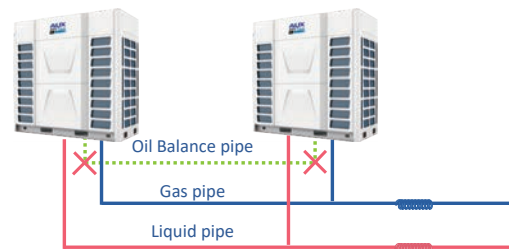


Non-Polar Communication

Non-polar communication between IDUs, easy installation and commissioning.

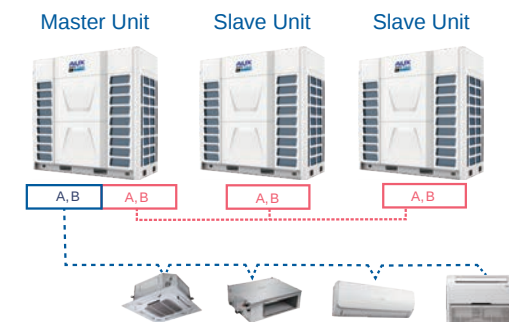

Centralized controller without Mini gateway

ARV 7 doesn't need Mini Gateway to connect CC02 or BMS system, making installation easier and more convenient.

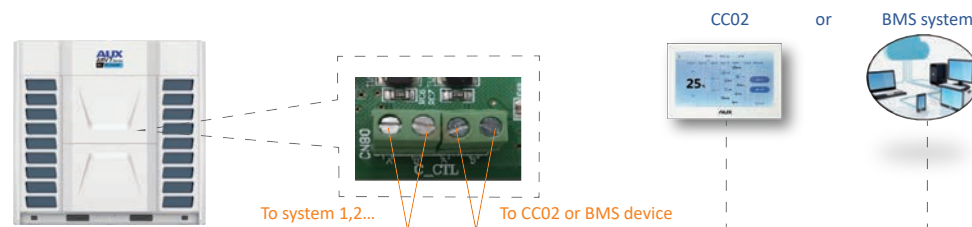


Same function: CC02(Max.64 systems&256 indoor units); MODBUS(Max.255 systems)

Auto Commissioning

When commissioning, the outdoor mainboard can check the operation state and show the corresponding error code in engineering mode.

Find out the faults when commissioning, enhance the reliability of the system.

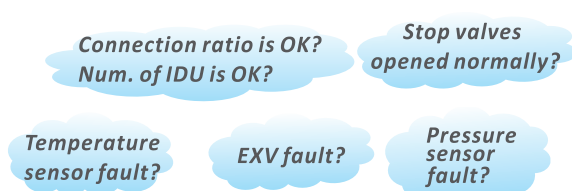

Auto Refrigerant Recycling &Auto Refrigerant Charging

Refrigerant can be recycled to the outdoor units when maintenance is need.

The outdoor unit can adjust the refrigerant amount according to the operation parameters such as pressure and temperature, and remind the installation personnel to stop charging.



One Button Test Run

Press the button lightly once in the main PCB board of the master ODU, to realize the cooling and heating test run, don't need to open indoor machine one by one.



Auto Dust Removal &Auto Snow-Blowing

The outdoor fan can rotate in reverse direction to remove dust on heat exchanger to ensure the heat exchange performance.



Black BOX Function

Using aviation grade Black BOX technique, memorizing operation parameters before the failure, finding fault information quickly, as an accurate, efficient maintenance services to provide valuable information, maintenance more convenient.



360° Pipe-connecting Mode


ARV- 7 series can be on the front, left side, right side to choose pipe-connecting direction freely, it's easy to install.



Reliable & Stable


Refrigerant PCB Cooling System

The PCB is well cooled by the refrigerant, ensuring the system operate steadily even in tropical area. Frequency limit of inverter compressor can be relaxed, so that the output capacity of ODU can be higher than conventional products.

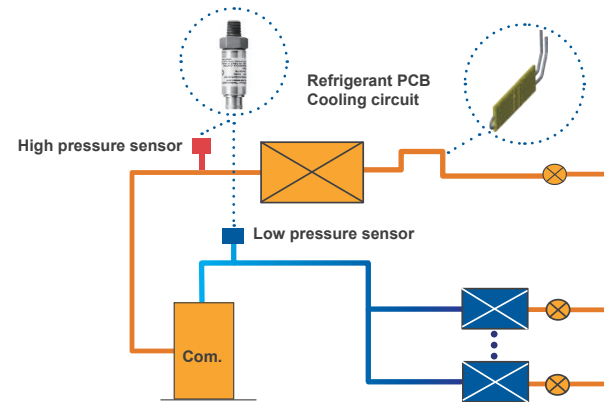


Precise Refrigerant Control

Real-time monitoring the discharge and suction pressure of the system. The output of compressors and the EXV open degree can be regulated precisely to optimize the compression ratio. Ensuring the compression ratio always in safety zone.

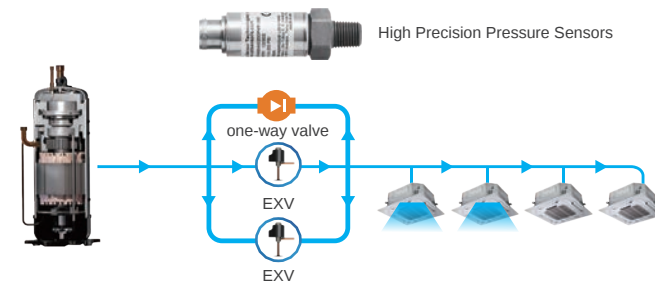

Module Alternate Operation


In one combination system, any module could run as the master unit according to the running time. Balance the life of the outdoor units in one system.

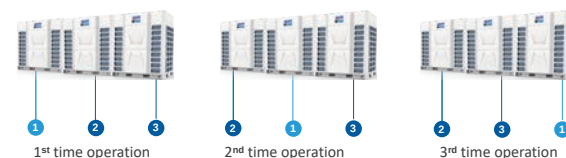

Back-Up Operation Technology


Module Emergency

As one module breaks down, module emergency can be set, then the rest modules in same combination can run normally.

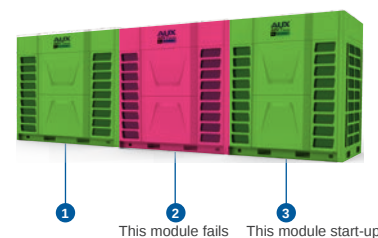


Compressor Emergency

As one compressor breaks down, compressor emergency can be set, then another compressor in this unit can run normally.

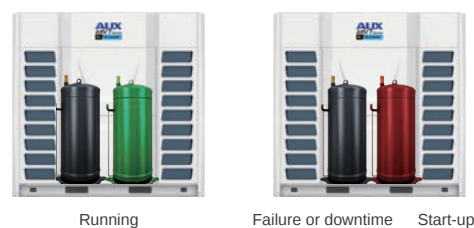

Fan motor backup.

Allowing time for maintenance or repair while comfort remains guaranteed.



All-round Protection



Oil Return Control Technology

Dynamic Oil Return Control Technology


Monitor compressor running state and running time, computing system reasonable oil return time.

6-Step Oil Separating Technology


Completely solve the problem of oil, the system more stable and reliable

Compressor Throwing Oil Technology


When the compressor oil level higher than the warning line, system through tubing eliminate redundant frozen oil, keep the oil balance between compressor.

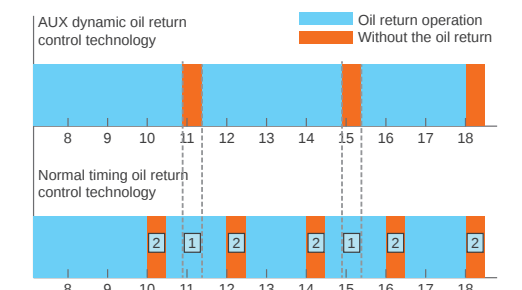

- 1 Need oil return but there was no oil return operation, which can't guarantee the system stability and reliability.
- 2 Without oil return operation is to carry on the oil return operation, which cause unnecessary waste.

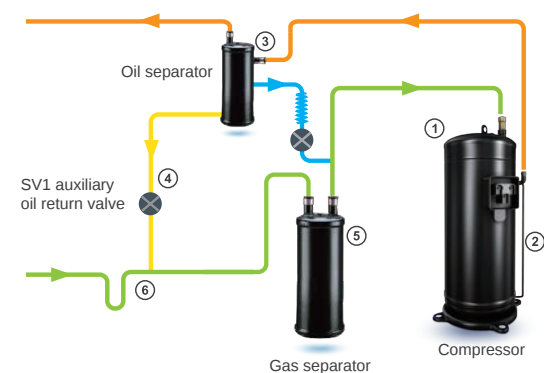

- ① Compressor with oil mist separation
- ② Oil self balancing control design
- ③ High efficient oil separator
- ④ Emergency oil circuit design
- ⑤ Gas-liquid separator oil return
- ⑥ System with oil return design

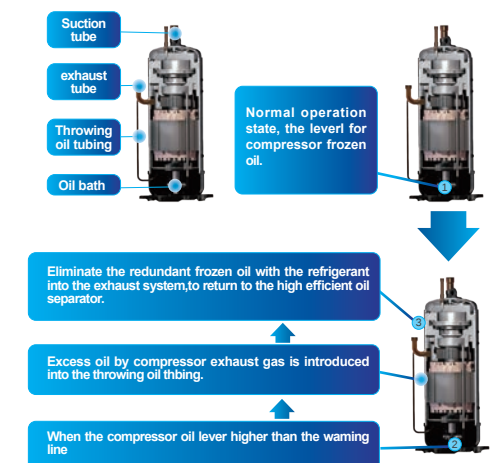

ARV 7 / ARV 7S Series



Flexible Outdoor Unit Combination															
HP	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36
38				★					★						
40				★						★					
42					★					★					
44						★				★					
46							★			★					
48								★		★					
50									★	★					
52										★★					
54						★									★
56							★								★
58								★							★
60									★						★
62										★					★
64											★				★
66												★			★
68													★		★
70														★	★
72															★★
74				★					★						★
76				★						★					★
78					★					★					★
80						★				★					★
82							★			★					★
84								★		★					★
86									★	★					★
88										★★					★
90						★									★★

*The above combination types are factory-recommended type. The combined type also can be combined at will.

ARV 7 / ARV 7S Series



Flexible Outdoor Unit Combination															
HP	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36
92							★								★★
94								★							★★
96									★						★★
98										★					★★
100											★				★★
102												★			★★
104													★		★★
106														★	★★
108															★★★
110										★★★★			★		
112										★★	★		★		
114										★★		★	★		
116										★★			★★		
118										★	★		★★		
120										★		★	★★		
122										★			★★★★		
124											★		★★★★		
126												★	★★★★		
128													★★★★★		
130								★							★★★★
132									★						★★★★
134										★					★★★★
136											★				★★★★
138												★			★★★★
140													★		★★★★
142														★	★★★★
144															★★★★★

*The above combination types are factory-recommended type. The combined type also can be combined at will.

ARV 7 Series

ARV 7 Series 380~415V-50/60Hz

HP			8	10	12	14
Model			ARV-H250/SR1MV	ARV-H280/SR1MV	ARV-H330/SR1MV	ARV-H400/SR1MV
Combination		HP	8	10	12	14
Capacity	Cooling	kW	25.2	28	33.5	40
	Heating	kW	25.2	28	33.5	40
Electric Data	Power supply	V~,Hz,Ph	380~415,3,50/60	380~415, 3, 50/60	380~415, 3, 50/60	380~415, 3, 50/60
	Cooling input	kW	5.31	6.11	8.48	9.90
	EER	W/W	4.75	4.58	3.95	4.04
	Heating input	kW	4.6	5.23	6.38	8.25
	COP	W/W	5.48	5.35	5.25	4.85
	SEER		6.7	6.5	7.2	6.5
	SCOP		4.2	4.0	4.2	4.3
Performance	Air Flow Volume	m³/h	12000	12000	12000	14000
	Sound Pressure level	dB(A)	≤58	≤58	≤58	≤61
Compressor	Type		DC inverter	DC inverter	DC inverter	DC inverter
	Quantity		1	1	1	1
Fan motor	Type		DC motor	DC motor	DC motor	DC motor
	Quantity		1	1	1	2
Max. No. of Indoor Units		unit	13	16	20	23
Connection Ratio		%	50~200	50~200	50~200	50~200
Dimension (WxDxH)	Net	mm	990×765×1635	990×765×1635	990×765×1635	1340×765×1635
	Packing	mm	1030×825×1865	1030×825×1865	1030×825×1865	1395×815×1865
Weight	Net	kg	215	215	230	265
	Gross	kg	225	225	240	280
Pipe Diameter	Liquid Side	mm	12.7	12.7	12.7	15.88
	Gas Side	mm	22.2	22.2	22.2	28.6
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-30~24	-30~24	-30~24	-30~24
Stuffing Quantity		20/40/40H	unit	14/28/28	14/28/28	11/22/22

ARV 7 Series 380~415V-50/60Hz

HP			16	18	20	22
Model			ARV-H450/SR1MV	ARV-H500/SR1MV	ARV-H560/SR1MV	ARV-H610/SR1MV
Combination		HP	16	18	20	22
Capacity	Cooling	kW	45	50.4	56	61.5
	Heating	kW	45	50.4	56	61.5
Electric Data	Power supply	V~,Hz,Ph	380~415, 3, 50/60	380~415, 3, 50/60	380~415, 3, 50/60	380~415, 3, 50/60
	Cooling input	kW	11.82	12.63	15.34	18.90
	EER	W/W	3.81	3.99	3.65	3.25
	Heating input	kW	9.78	11.69	13.83	15.44
	COP	W/W	4.60	4.31	4.05	3.98
	SEER		6.3	6.0	5.6	5.2
	SCOP		4.2	4.0	3.6	3.5
Performance	Air Flow Volume	m3/h	14000	16000	16000	16000
	Sound Pressure level	dB(A)	≤61	≤63	≤63	≤63
Compressor	Type		DC inverter	DC inverter	DC inverter	DC inverter
	Quantity		1	2	2	2
Fan motor	Type		DC motor	DC motor	DC motor	DC motor
	Quantity		2	2	2	2
Max. No. of Indoor Units		unit	26	30	33	36
Connection Ratio		%	50~200	50~200	50~200	50~200
Dimension (WxDxH)	Net	mm	1340×765×1635	1340×765×1635	1340×765×1635	1340×765×1635
	Packing	mm	1395×815×1865	1395×815×1865	1395×815×1865	1395×815×1865
Weight	Net	kg	265	330	330	330
	Gross	kg	280	345	345	345
Pipe Diameter	Liquid Side	mm	15.88	15.88	15.88	15.88
	Gas Side	mm	28.6	28.6	28.6	28.6
Operation Range	Cooling	℃	-15~55	-15~55	-15~55	-15~55
	Heating	℃	-30~24	-30~24	-30~24	-30~24
Stuffing Quantity		20/40/40H	unit	11/22/22	11/22/22	11/22/22

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
8.The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV7 Series 380~415V -50/60Hz

HP			24	26	28	30
Model			ARV-H680/SR1MV	ARV-H730/SR1MV	ARV-H785/SR1MV	ARV-H850/SR1MV
Combination		HP	24	26	28	30
Capacity	Cooling	kW	68.0	73.0	78.5	85.0
	Heating	kW	75.0	81.5	87.5	95.0
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	18.52	20.7	23.55	26.48
	EER	W/W	3.67	3.53	3.33	3.21
	Heating input	kW	18.90	20.69	23.90	27.05
	COP	W/W	3.97	3.94	3.66	3.51
	SEER		29000	29000	29000	30000
	SCOP		≤62	≤62	≤63	≤64
Performance	Air Flow Volume	m³/h	DC Inventerv	DC Inventerv	DC Inventerv	DC Inventerv
	Sound Pressure level	dB(A)	2	2	2	2
Compressor	Type		DC motor	DC motor	DC motor	DC motor
	Quantity		2	2	2	2
Fan motor	Type		40	42	46	49
	Quantity		50~200	50~200	50~200	50~200
Max. No. of Indoor Units		unit	1850×825×1760	1850×825×1760	1850×825×1760	1850×825×1760
Connection Ratio		%	1925×930×1930	1925×930×1930	1925×930×1930	1925×930×1930
Dimension (WxDxH)	Net	mm	388	388	388	422
	Packing	mm	411	411	411	445
Weight	Net	kg	19.05	19.05	22.20	22.20
	Gross	kg	35.00	35.00	35.00	35.00
Pipe Diameter	Liquid Side	mm	-15~55	-15~55	-15~55	-15~55
	Gas Side	mm	-30~24	-30~24	-30~24	-30~24
Operation Range	Cooling	°C	6/12/12	6/12/12	6/12/12	6/12/12
	Heating	°C	-30~24	-30~24	-30~24	-30~24
Stuffing Quantity		20/40/40H	unit	14/28/28	14/28/28	11/22/22

ARV7 Series 380~415V -50/60Hz

HP			32	34	36
Model			ARV-H900/SR1MV	ARV-H950/SR1MV	ARV-H1010SR1MV
Combination		HP	32	34	36
Capacity	Cooling	kW	90.0	95.2	101.0
	Heating	kW	100.0	106.0	112.0
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	29.42	31.64	33.92
	EER	W/W	3.06	3.01	2.98
	Heating input	kW	29.32	31.65	33.84
	COP	W/W	3.41	3.35	3.31
	SEER		30000	30000	30000
	SCOP		≤64	≤66	≤66
Performance	Air Flow Volume	m³/h	DC Inventerv	DC Inventerv	DC Inventerv
	Sound Pressure level	dB(A)	2	2	2
Compressor	Type		DC motor	DC motor	DC motor
	Quantity		2	2	2
Fan motor	Type		52	56	59
	Quantity		50~200	50~200	50~200
Max. No. of Indoor Units		unit	1850×825×1760	1850×825×1760	1850×825×1760
Connection Ratio		%	1925×930×1930	1925×930×1930	1925×930×1930
Dimension (WxDxH)	Net	mm	422	430	430
	Packing	mm	445	453	453
Weight	Net	kg	22.20	22.20	22.20
	Gross	kg	35.00	35.00	35.00
Pipe Diameter	Liquid Side	mm	-15~55	-15~55	-15~55
	Gas Side	mm	-30~24	-30~24	-30~24
Operation Range	Cooling	°C	6/12/12	6/12/12	6/12/12
	Heating	°C	-30~24	-30~24	-30~24
Stuffing Quantity		20/40/40H	unit	14/28/28	14/28/28

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
8.The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV 7 Series 380~415V-50/60Hz

HP			38	40	42	44	46
Model			ARV-H1060/SR1MV	ARV-H1120/SR1MV	ARV-H1170/SR1MV	ARV-H1230/SR1MV	ARV-H1280/SR1MV
Combination		HP	16+22	18+22	20+22	22+22	12×2+22
Capacity	Cooling	kW	106.5	111.9	117.5	123	128.5
	Heating	kW	106.5	111.9	117.5	123	128.5
Electric Data	Power supply	V~,Hz,Ph	380~415, 3, 50/60	380~415,3,50/60	380~415, 3, 50/60	380~415, 3, 50/60	380~415, 3, 50/60
	Cooling input	kW	30.72	31.53	34.24	37.80	35.86
	EER	WW	3.47	3.55	3.43	3.25	3.58
	Heating input	kW	25.22	27.13	29.27	30.88	28.20
	COP	WW	4.22	4.12	4.01	3.98	4.56
	SEER		6.3	6.0	5.6	5.2	7.2
	SCOP		4.2	4.0	3.6	3.5	4.2
Performance	Air Flow Volume	m³/h	14000+16000	16000×2	16000×2	16000×2	12000×2+16000
	Sound Pressure level	dB(A)	≤63	≤63	≤63	≤63	≤63
Compressor	Type		DC inverter	DC inverter	DC inverter	DC inverter	DC inverter
	Quantity		3	4	4	4	4
Fan motor	Type		DC motor	DC motor	DC motor	DC motor	DC motor
	Quantity		4	4	4	4	4
Max. No. of Indoor Units	unit		62	64	64	64	64
Connection Ratio	%		50~200	50~200	50~200	50~200	50~200
Dimension (WxDxH)	Net	mm	(1340×765×1635)×2	(1340×765×1635)×2	(1340×765×1635)×2	(1340×765×1635)×2	(990×765×1635)×2+1340×765×1635
	Packing	mm	(1395×815×1865)×2	(1395×815×1865)×2	(1395×815×1865)×2	(1395×815×1865)×2	(1050×815×1805)×2+1395×815×1865
Weight	Net	kg	265+330	330×2	330×2	330×2	230×2+330
	Gross	kg	280+345	345×2	345×2	345×2	240×2+345
Pipe Diameter	Liquid Side	mm	19.05(3/4)	19.05(3/4)	19.05(3/4)	19.05(3/4)	19.05(3/4)
	Gas Side	mm	38.1(3/2)	38.1(3/2)	38.1(3/2)	38.1(3/2)	38.1(3/2)
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-30~24	-30~24	-30~24	-30~24	-30~24

ARV 7 Series 380~415V-50/60Hz

HP			48	50	52	54
Model			ARV-H1340/SR1MV	ARV-H1400/SR1MV	ARV-H1450/SR1MV	ARV-H1510/SR1MV
Combination		HP	10+16+22	12+16+22	10+20+22	10+22×2
Capacity	Cooling	kW	134.5	140	145.5	151
	Heating	kW	134.5	140	145.5	151
Electric Data	Power supply	V~,Hz,Ph	380~415, 3, 50/60	380~415, 3, 50/60	380~415, 3, 50/60	380~415, 3, 50/60
	Cooling input	kW	36.83	39.20	40.35	43.91
	EER	WW	3.65	3.57	3.61	3.44
	Heating input	kW	30.45	31.60	34.50	36.11
	COP	WW	4.42	4.43	4.22	4.18
	SEER		6.5	7.2	6.5	6.5
	SCOP		4.2	4.2	4.0	4.0
Performance	Air Flow Volume	m³/h	12000+14000+16000	12000+14000+16000	12000+16000×2	12000+16000×2
	Sound Pressure level	dB(A)	≤63	≤63	≤63	≤63
Compressor	Type		DC inverter	DC inverter	DC inverter	DC inverter
	Quantity		4	4	5	5
Fan motor	Type		DC motor	DC motor	DC motor	DC motor
	Quantity		5	5	5	5
Max. No. of Indoor Units	unit		64	64	64	64
Connection Ratio	%		50~200	50~200	50~200	50~200
Dimension (WxDxH)	Net	mm	990×765×1635+(1340×765×1635)×2	990×765×1635+(1340×765×1635)×2	990×765×1635+(1340×765×1635)×2	990×765×1635+(1340×765×1635)×2
	Packing	mm	1050×815×1805+(1395×815×1865)×2	1050×815×1805+(1395×815×1865)×2	1050×815×1805+(1395×815×1865)×2	1050×815×1805+(1395×815×1865)×2
Weight	Net	kg	215+265+330	230+265+330	215+330×2	215+330×2
	Gross	kg	225+280+345	240+280+345	225+345×2	225+345×2
Pipe Diameter	Liquid Side	mm	19.05(3/4)	19.05(3/4)	19.05(3/4)	19.05(3/4)
	Gas Side	mm	38.1(3/2)	41.3(13/8)	41.3(13/8)	41.3(13/8)
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-30~24	-30~24	-30~24	-30~24

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
8.The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV 7 Series 380~415V-50/60Hz

HP			56	58	60	62
Model			ARV-H1560/SR1MV	ARV-H1630/SR1MV	ARV-H1680/SR1MV	ARV-H1730/SR1MV
Combination		HP	12+22×2	14+22×2	16+22×2	18+22×2
Capacity	Cooling	kW	156.5	163	168	173.4
	Heating	kW	156.5	163	168	173.4
Electric Data	Power supply	V~,Hz,Ph	380~415,3,50/60	380~415, 3, 50/60	380~415, 3, 50/60	380~415, 3, 50/60
	Cooling input	kW	46.28	47.70	49.62	50.43
	EER	WW	3.38	3.42	3.39	3.44
	Heating input	kW	37.26	39.13	40.66	42.57
	COP	WW	4.20	4.17	4.13	4.07
	SEER		7.2	6.5	6.3	6.0
	SCOP		4.2	4.3	4.2	4.0
Performance	Air Flow Volume	m³/h	12000+16000×2	14000+16000×2	14000+16000×2	16000×3
	Sound Pressure level	dB(A)	≤63	≤63	≤63	≤63
Compressor	Type		DC inverter	DC inverter	DC inverter	DC inverter
	Quantity		5	5	5	6
Fan motor	Type		DC motor	DC motor	DC motor	DC motor
	Quantity		5	6	6	6
Max. No. of Indoor Units	unit		64	64	64	64
Connection Ratio	%		50~200	50~200	50~200	50~200
Dimension (WxDxH)	Net	mm	990×765×1635+(1340×765×1635)×2	(1340×765×1635)×3	(1340×765×1635)×3	(1340×765×1635)×3
	Packing	mm	1050×815×1805+(1395×815×1865)×2	(1395×815×1865)×3	(1395×815×1865)×3	(1395×815×1865)×3
Weight	Net	kg	230+330×2	265+330×2	265+330×2	330×3
	Gross	kg	240+345×2	280+345×2	280+345×2	345×3
Pipe Diameter	Liquid Side	mm	19.05(3/4)	19.05(3/4)	19.05(3/4)	19.05(3/4)
	Gas Side	mm	41.3(13/8)	41.3(13/8)	41.3(13/8)	41.3(13/8)
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-30~24	-30~24	-30~24	-30~24

ARV 7 Series 380~415V-50/60Hz

HP			64	66	68	70
Model			ARV-H1790/SR1MV	ARV-H1840/SR1MV	ARV-H1900/SR1MV	ARV-H1960/SR1MV
Combination		HP	20+22×2	22×3	12×2+22×2	10+16+22×2
Capacity	Cooling	kW	179	184.5	190	196
	Heating	kW	179	184.5	190	196
Electric Data	Power supply	V~,Hz,Ph	380~415, 3, 50/60	380~415, 3, 50/60	380~415, 3, 50/60	380~415, 3, 50/60
	Cooling input	kW	53.14	56.70	54.76	55.73
	EER	WW	3.37	3.25	3.47	3.52
	Heating input	kW	44.71	46.32	43.64	45.89
	COP	WW	4.00	3.98	4.35	4.27
	SEER		5.6	5.2	7.2	6.5
	SCOP		3.6	3.5	4.2	4.2
Performance	Air Flow Volume	m³/h	16000×3	16000×3	12000×2+16000×2	12000+14000+16000×2
	Sound Pressure level	dB(A)	≤63	≤63	≤63	≤63
Compressor	Type		DC inverter	DC inverter	DC inverter	DC inverter
	Quantity		6	6	6	6
Fan motor	Type		DC motor	DC motor	DC motor	DC motor
	Quantity		6	6	6	7
Max. No. of Indoor Units	unit		64	64	64	64
Connection Ratio	%		50~200	50~200	50~200	50~200
Dimension (WxDxH)	Net	mm	(1340×765×1635)×3	(1340×765×1635)×3	(990×765×1635)×2+(1340×765×1635)×2	990×765×1635+(1340×765×1635)×3
	Packing	mm	(1395×815×1865)×3	(1395×815×1865)×3	(1050×815×1805)×2+(1395×815×1865)×2	1050×815×1805+(1395×815×1865)×3
Weight	Net	kg	330×3	330×3	230×2+330×2	215+265+330×2
	Gross	kg	345×3	345×3	240×2+345×2	225+280+345×2
Pipe Diameter	Liquid Side	mm	19.05(3/4)	19.05(3/4)	22.2(7/8)	22.2(7/8)
	Gas Side	mm	41.3(13/8)	41.3(13/8)	44.5(7/4)	44.5(7/4)
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-30~24	-30~24	-30~24	-30~24

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
8.The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV 7 Series 380~415V-50/60Hz

HP			72	74	76	78
Model			ARV-H2010/SR1MV	ARV-H2070/SR1MV	ARV-H2120/SR1MV	ARV-H2180/SR1MV
Combination		HP	12+16+22×2	10+20+22×2	10+22×3	12+22×3
Capacity	Cooling	kW	201.5	207	212.5	218
	Heating	kW	201.5	207	212.5	218
Electric Data	Power supply	V~,Hz,Ph	380~415,3,50/60	380~415, 3, 50/60	380~415, 3, 50/60	380~415, 3, 50/60
	Cooling input	kW	58.10	59.25	62.81	65.18
	EER	W/W	3.47	3.49	3.38	3.34
	Heating input	kW	47.04	49.94	51.55	52.70
	COP	W/W	4.28	4.14	4.12	4.14
	SEER		7.2	6.5	6.5	7.2
	SCOP		4.2	4.0	4.0	4.2
Performance	Air Flow Volume	m³/h	12000+14000+16000×2	12000+16000×3	12000+16000×3	12000+16000×3
	Sound Pressure level	dB(A)	≤63	≤63	≤63	≤63
Compressor	Type		DC inverter	DC inverter	DC inverter	DC inverter
	Quantity		6	7	7	7
Fan motor	Type		DC motor	DC motor	DC motor	DC motor
	Quantity		7	7	7	7
Max. No. of Indoor Units		unit	64	64	64	64
Connection Ratio		%	50~200	50~200	50~200	50~200
Dimension (WxDxH)	Net	mm	990×765×1635+(1340×765×1635)×3	990×765×1635+(1340×765×1635)×3	990×765×1635+(1340×765×1635)×3	990×765×1635+(1340×765×1635)×3
	Packing	mm	1050×815×1805+(1395×815×1865)×3	1050×815×1805+(1395×815×1865)×3	1050×815×1805+(1395×815×1865)×3	1050×815×1805+(1395×815×1865)×3
Weight	Net	kg	230+265+330×2	215+330×3	215+330×3	230+330×3
	Gross	kg	240+280+345×2	225+345×3	225+345×3	240+345×3
Pipe Diameter	Liquid Side	mm	22.2(7/8)	22.2(7/8)	22.2(7/8)	22.2(7/8)
	Gas Side	mm	44.5(7/4)	44.5(7/4)	44.5(7/4)	44.5(7/4)
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-30~24	-30~24	-30~24	-30~24

ARV 7 Series 380~415V-50/60Hz

HP			80	82	84	86
Model			ARV-H2240/SR1MV	ARV-H2290/SR1MV	ARV-H2350/SR1MV	ARV-H2400/SR1MV
Combination		HP	14+22×3	16+22×3	18+22×3	20+22×3
Capacity	Cooling	kW	224.5	229.5	234.9	240.5
	Heating	kW	224.5	229.5	234.9	240.5
Electric Data	Power supply	V~,Hz,Ph	380~415, 3, 50/60	380~415, 3, 50/60	380~415, 3, 50/60	380~415, 3, 50/60
	Cooling input	kW	66.60	68.52	69.33	72.04
	EER	W/W	3.37	3.35	3.39	3.34
	Heating input	kW	54.57	56.10	58.01	60.15
	COP	W/W	4.11	4.09	4.05	4.00
	SEER		6.5	6.3	6.0	5.6
	SCOP		4.3	4.2	4.0	3.6
Performance	Air Flow Volume	m³/h	14000+16000×3	14000+16000×3	16000×4	16000×4
	Sound Pressure level	dB(A)	≤63	≤63	≤63	≤63
Compressor	Type		DC inverter	DC inverter	DC inverter	DC inverter
	Quantity		7	7	8	8
Fan motor	Type		DC motor	DC motor	DC motor	DC motor
	Quantity		8	8	8	8
Max. No. of Indoor Units		unit	64	64	64	64
Connection Ratio		%	50~200	50~200	50~200	50~200
Dimension (WxDxH)	Net	mm	(1340×765×1635)×4	(1340×765×1635)×4	(1340×765×1635)×4	(1340×765×1635)×4
	Packing	mm	(1395×815×1865)×4	(1395×815×1865)×4	(1395×815×1865)×4	(1395×815×1865)×4
Weight	Net	kg	265+330×3	265+330×3	330×4	330×4
	Gross	kg	280+345×3	280+345×3	345×4	345×4
Pipe Diameter	Liquid Side	mm	22.2(7/8)	22.2(7/8)	22.2(7/8)	22.2(7/8)
	Gas Side	mm	44.5(7/4)	44.5(7/4)	44.5(7/4)	44.5(7/4)
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-30~24	-30~24	-30~24	-30~24

- Notes:
- Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
 - Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
 - Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
 - We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
 - Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
 - The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
 - Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
 - The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV 7 Series 380~415V-50/60Hz

HP			90	92	94	96	98
Model			ARV-H2520/SR1MV	ARV-H2580/SR1MV	ARV-H2635/SR1MV	ARV-H2700/SR1MV	ARV-H2750/SR1MV
Combination		HP	18+36X2	20+36X2	22+36X2	24+36X2	26+36X2
Capacity	Cooling	kW	252.4	258	263.5	270	275
	Heating	kW	274.4	280.0	285.5	299.0	305.5
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	80.47	83.18	86.74	86.36	88.54
	EER	W/W	3.13	3.10	3.03	3.12	3.10
	Heating input	kW	79.47	81.61	83.22	86.68	88.47
	COP	W/W	3.4	3.43	3.43	3.44	3.45
Performance	Air Flow Volume	m³/h	16000+30000X2	16000+30000X2	16000+30000X2	29000+30000X2	29000+30000X2
	Sound Pressure level	dB(A)	≤66	≤66	≤66	≤66	≤66
Compressor	Type		DC Inventerv	DC Inventerv	DC Inventerv	DC Inventerv	DC Inventerv
	Quantity		6	6	6	6	6
Fan motor	Type		DC motor	DC motor	DC motor	DC motor	DC motor
	Quantity		6	6	6	6	6
Max. No. of Indoor Units		unit	64	64	64	64	64
Connection Ratio		%	50~200	50~200	50~200	50~200	50~200
Dimension (WxDxH)	Net	mm	1340×765×1635 (1850×825×1760)X2 1395×815×1865	1340×765×1635 (1850×825×1760)X2 1395×815×1865	1340×765×1635 (1850×825×1760)X2 1395×815×1865	(1850×825×1760)X3	(1850×825×1760)X3
	Packing	mm	(1925×930×1930)X2	(1925×930×1930)X2	(1925×930×1930)X2	(1925×930×1930)X3	(1925×930×1930)X3
Weight	Net	kg	330+430X2	330+430X2	330+430X2	388+430X2	388+430X2
	Gross	kg	345+453X2	345+453X2	345+453X2	411+453X2	411+453X2
Pipe Diameter	Liquid Side	mm	47.60	47.60	47.60	47.60	47.60
	Gas Side	mm	50.80	50.80	50.80	50.80	50.80
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-30~24	-30~24	-30~24	-30~24	-30~24

ARV 7 Series 380~415V-50/60Hz

HP			100	102	104	106	108
Model			ARV-H2800/SR1MV	ARV-H2870/SR1MV	ARV-H2920/SR1MV	ARV-H2970/SR1MV	ARV-H3030/SR1MV
Combination		HP	28+36X2	30+36X2	32+36X2	34+36X2	36X3
Capacity	Cooling	kW	280.5	287	292	297.2	303
	Heating	kW	311.5	319.0	324.0	330.0	336.0
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	91.39	94.32	97.26	99.48	101.76
	EER	W/W	3.06	3.04	3.00	2.98	2.97
	Heating input	kW	91.68	94.83	97.1	99.43	101.67
	COP	W/W	3.39	3.36	3.33	3.31	3.30
Performance	Air Flow Volume	m³/h	29000+30000X2	30000X3	30000X3	30000X3	30000X3
	Sound Pressure level	dB(A)	≤66	≤66	≤66	≤66	≤66
Compressor	Type		DC Inventerv	DC Inventerv	DC Inventerv	DC Inventerv	DC Inventerv
	Quantity		6	6	6	6	6
Fan motor	Type		DC motor	DC motor	DC motor	DC motor	DC motor
	Quantity		6	6	6	6	6
Max. No. of Indoor Units		unit	64	64	64	64	64
Connection Ratio		%	50~200	50~200	50~200	50~200	50~200
Dimension (WxDxH)	Net	mm	(1850×825×1760)X3	(1850×825×1760)X3	(1850×825×1760)X3	(1850×825×1760)X3	(1850×825×1760)X3
	Packing	mm	(1925×930×1930)X3	(1925×930×1930)X3	(1925×930×1930)X3	(1925×930×1930)X3	(1925×930×1930)X3
Weight	Net	kg	388+430X2	422+430X2	422+430X2	430X3	430X3
	Gross	kg	411+453X2	445+453X2	422+453X2	453X3	453X3
Pipe Diameter	Liquid Side	mm	47.60	47.60	47.60	47.60	47.60
	Gas Side	mm	50.80	50.80	50.80	50.80	50.80
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-30~24	-30~24	-30~24	-30~24	-30~24

- Notes:
- Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
 - Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
 - Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
 - We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
 - Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
 - The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
 - Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
 - The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV 7 Series 380~415V-50/60Hz

HP			110	112	114	116	118
Model			ARV-H3080/SR1MV	ARV-H3140/SR1MV	ARV-H3200/SR1MV	ARV-H3250/SR1MV	ARV-H3310/SR1MV
Combination		HP	18+20+36X2	18+22+36X2	18+24+36X2	18+26+36X2	18+28+36X2
Capacity	Cooling	kW	308.4	313.9	320.4	325.4	330.9
	Heating	kW	330.4	335.9	349.4	355.9	361.9
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	95.81	99.37	98.99	101.17	104.02
	EER	WW	3.21	3.15	3.236690575	3.21	3.18
	Heating input	kW	93.3	94.91	98.37	100.16	103.37
	COP	WW	3.54	3.53	3.551895903	3.55	3.50
Performance	Air Flow Volume	m³/h	16000X2+30000X2	16000X2+30000X2	16000+29000+30000X2	16000+29000+30000X2	16000+29000+30000X2
	Sound Pressure level	dB(A)	≤66	≤66	≤66	≤66	≤66
Compressor	Type		DC Inventerv	DC Inventerv	DC Inventerv	DC Inventerv	DC Inventerv
	Quantity		8	8	8	8	8
Fan motor	Type		DC motor	DC motor	DC motor	DC motor	DC motor
	Quantity		8	8	8	8	8
Max. No. of Indoor Units	unit		64	64	64	64	64
Connection Ratio	%		50~200	50~200	50~200	50~200	50~200
Dimension (WxDxH)	Net	mm	(1340×765×1635)X2 (1850×825×1760)X2 (1395×815×1865)X2	(1340×765×1635)X2 (1850×825×1760)X2 (1395×815×1865)X2	1340×765×1635 (1850×825×1760)X3 1395×815×1865	1340×765×1635 (1850×825×1760)X3 1395×815×1865	1340×765×1635 (1850×825×1760)X3 1395×815×1865
	Packing	mm	(1925×930×1930)X2	(1925×930×1930)X2	(1925×930×1930)X3	(1925×930×1930)X3	(1925×930×1930)X3
Weight	Net	kg	330X2+430X2	330X2+430X2	330+388+430X2	330+388+430X2	330+388+430X2
	Gross	kg	345X2+453X2	345X2+453X2	345+411+453X2	345+411+453X2	345+411+453X2
Pipe Diameter	Liquid Side	mm	28.60	28.60	28.60	28.60	28.60
	Gas Side	mm	54.00	54.00	54.00	54.00	54.00
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-30~24	-30~24	-30~24	-30~24	-30~24

ARV 7 Series 380~415V-50/60Hz

HP			120	122	124	126	128
Model			ARV-H3370/SR1MV	ARV-H3420/SR1MV	ARV-H370/SR1MV	ARV-H3530/SR1MV	ARV-H3590/SR1MV
Combination		HP	18+30+36X2	18+32+36X2	18+34+36X2	18+36X3	20+36X3
Capacity	Cooling	kW	337.4	342.4	347.6	353.4	359
	Heating	kW	369.4	374.4	380.4	386.4	392.0
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	106.95	109.89	112.11	114.39	117.1
	EER	WW	3.15	3.11	3.10	3.08	3.06
	Heating input	kW	106.52	108.79	111.12	113.36	115.45
	COP	WW	3.46	3.44	3.42	3.40	3.39
Performance	Air Flow Volume	m³/h	16000+30000X3	16000+30000X3	16000+30000X3	16000+30000X3	16000+30000X3
	Sound Pressure level	dB(A)	≤66	≤66	≤66	≤66	≤66
Compressor	Type		DC Inventerv	DC Inventerv	DC Inventerv	DC Inventerv	DC Inventerv
	Quantity		8	8	8	8	8
Fan motor	Type		DC motor	DC motor	DC motor	DC motor	DC motor
	Quantity		8	8	8	8	8
Max. No. of Indoor Units	unit		64	64	64	64	64
Connection Ratio	%		50~200	50~200	50~200	50~200	50~200
Dimension (WxDxH)	Net	mm	1340×765×1635 (1850×825×1760)X3 1395×815×1865	1340×765×1635 (1850×825×1760)X3 1395×815×1865	1340×765×1635 (1850×825×1760)X3 1395×815×1865	1340×765×1635 (1850×825×1760)X3 1395×815×1865	1340×765×1635 (1850×825×1760)X3 1395×815×1865
	Packing	mm	(1925×930×1930)X3	(1925×930×1930)X3	(1925×930×1930)X3	(1925×930×1930)X3	(1925×930×1930)X3
Weight	Net	kg	330+422+430X2	330+422+430X2	330+430X3	330+430X3	330+430X3
	Gross	kg	345+445+453X2	345+422+453X2	345+453X3	345+453X3	345+453X3
Pipe Diameter	Liquid Side	mm	28.60	28.60	28.60	28.60	28.60
	Gas Side	mm	54.00	54.00	54.00	54.00	54.00
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-30~24	-30~24	-30~24	-30~24	-30~24

- Notes:
- 1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
 - 2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
 - 3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
 - 4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
 - 5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
 - 6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
 - 7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
 - 8.The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV 7 Series 380~415V-50/60Hz

HP			130	132	134	136
Model			ARV-H3645SR1MV	ARV-H3710/SR1MV	ARV-H3760/SR1MV	ARV-H3810/SR1MV
Combination		HP	22+36X3	24+36X3	26+36X3	28+36X3
Capacity	Cooling	kW	364.5	371	376	381.5
	Heating	kW	397.5	411.0	417.5	423.5
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	120.66	120.28	122.46	125.31
	EER	WW	3.02	3.08	3.07	3.04
	Heating input	kW	117.06	120.52	122.31	125.52
	COP	WW	3.39	3.41	3.41	3.37
Performance	Air Flow Volume	m³/h	16000+30000X3	29000+30000X3	29000+30000X3	29000+30000X3
	Sound Pressure level	dB(A)	≤66	≤66	≤66	≤66
Compressor	Type		DC Inventerv	DC Inventerv	DC Inventerv	DC Inventerv
	Quantity		8	8	8	8
Fan motor	Type		DC motor	DC motor	DC motor	DC motor
	Quantity		8	8	8	8
Max. No. of Indoor Units	unit		64	64	64	64
Connection Ratio	%		50~200	50~200	50~200	50~200
Dimension (WxDxH)	Net	mm	1340×765×1635 (1850×825×1760)X3 1395×815×1865	(1850×825×1760)X4	(1850×825×1760)X4	(1850×825×1760)X4
	Packing	mm	(1925×930×1930)X3	(1925×930×1930)X4	(1925×930×1930)X4	(1925×930×1930)X4
Weight	Net	kg	330+430X3	388+430X3	388+430X3	388+430X3
	Gross	kg	345+453X3	411+453X3	411+453X3	411+453X3
Pipe Diameter	Liquid Side	mm	57.20	57.20	57.20	57.20
	Gas Side	mm	54.00	54.00	54.00	54.00
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-30~24	-30~24	-30~24	-30~24

ARV 7 Series 380~415V-50/60Hz

HP			138	122	142	144
Model			ARV-H3880/SR1MV	ARV-H3420/SR1MV	ARV-H3980/SR1MV	ARV-H4040/SR1MV
Combination		HP	30+36X3	18+32+36X2	34+36X3	36X4
Capacity	Cooling	kW	388	342.4	398.2	404
	Heating	kW	431.0	374.4	442.0	448.0
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	128.24	109.89	133.4	135.68
	EER	WW	3.02	3.11	2.98	2.97
	Heating input	kW	128.67	108.79	133.27	135.51
	COP	WW	3.34	3.44	3.31	3.30
Performance	Air Flow Volume	m³/h	30000X4	16000+30000X3	30000X4	30000X4
	Sound Pressure level	dB(A)	≤66	≤66	≤66	≤66
Compressor	Type		DC Inventerv	DC Inventerv	DC Inventerv	DC Inventerv
	Quantity		8	8	8	8
Fan motor	Type		DC motor	DC motor	DC motor	DC motor
	Quantity		8	8	8	8
Max. No. of Indoor Units	unit		64	64	64	64
Connection Ratio	%		50~200	50~200	50~200	50~200
Dimension (WxDxH)	Net	mm	(1850×825×1760)X4	1340×765×1635 (1850×825×1760)X3 1395×815×1865	(1850×825×1760)X4	(1850×825×1760)X4
	Packing	mm	(1925×930×1930)X4	(1925×930×1930)X3	(1925×930×1930)X4	(1925×930×1930)X4
Weight	Net	kg	422+430X3	330+422+430X2	430X4	430X4
	Gross	kg	445+453X3	345+422+453X2	453X4	453X4
Pipe Diameter	Liquid Side	mm	28.60	28.60	28.60	28.60
	Gas Side	mm	54.00	54.00	54.00	54.00
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-30~24	-30~24	-30~24	-30~24

- Notes:
- 1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
 - 2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
 - 3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
 - 4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
 - 5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
 - 6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
 - 7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
 - 8.The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV 7S Series

ARV 7S Series 380~415V-50/60Hz

HP			8	10	12	14
Model			ARV-H250/SR1MV-S	ARV-H280/SR1MV-S	ARV-H330/SR1MV-S	ARV-H400/SR1MV-S
Combination		HP	8	10	12	14
Capacity	Cooling	kW	25.2	28	33.5	40
	Heating	kW	25.2	28	33.5	40
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	5.31	6.79	9.1	10.52
	EER	W/W	4.745762712	4.12371134	3.681318681	3.802281369
	Heating input	kW	5.48	6.84	9.36	10.93
	COP	W/W	4.598540146	4.093567251	3.579059829	3.659652333
Performance	Air Flow Volume	m³/h	12000	12000	12000	14000
	Sound Pressure level	dB(A)	43-58	43-58	43-58	43-61
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv
	Quantity		1	1	1	1
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv
	Quantity		1	1	1	2
Connection Ratio		%	50-200	50-200	50-200	50-200
Dimension (WxDxH)	Net	mm	990×765× 1635	990×765×1635	990×765×1635	1340×765×1635
	Packing	mm	1040×830×1800	1040×830×1800	1040×830×1800	1400×830×1800
Weight	Net	kg	210	210	210	255
	Gross	kg	220	220	220	270
Refrigerant Piping	Liquid Side	mm	φ12.7	φ12.7	φ12.7	φ15.88
	Gas Side	mm	φ22.2	φ22.2	φ22.2	φ28.6
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24

ARV 7S Series 380~415V-50/60Hz

HP			16	18	20	22
Model			ARV-H450/SR1MV-S	ARV-H500/SR1MV-S	ARV-H560/SR1MV-S	ARV-H610/SR1MV-S
Combination		HP	16	18	20	22
Capacity	Cooling	kW	45	50.4	56	61.5
	Heating	kW	45	50.4	56	61.5
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	12.2	14.8	17.64	20.2
	EER	W/W	3.68852459	3.405405405	3.17	3.04
	Heating input	kW	12.21	14.89	17.31	19.17
	COP	W/W	3.685503686	3.384822028	3.235124206	3.208137715
Performance	Air Flow Volume	m³/h	14000	16000	16000	16000
	Sound Pressure level	dB(A)	43-61	43-63	43-63	43-63
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv
	Quantity		1	1	2	2
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv
	Quantity		2	2	2	2
Connection Ratio		%	50-200	50-200	50-200	50-200
Dimension (WxDxH)	Net	mm	1340×765×1635	1340×765×1635	1340×765×1635	1340×765×1635
	Packing	mm	1400×830×1800	1400×830×1800	1400×830×1800	1400×830×1800
Weight	Net	kg	255	255	313	313
	Gross	kg	270	270	328	328
Refrigerant Piping	Liquid Side	mm	φ15.88	φ15.88	φ15.88	φ15.88
	Gas Side	mm	φ28.6	φ28.6	φ28.6	φ28.6
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24

Notes:

1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.

2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.

3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.

4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.

5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.

6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.

8.The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV 7S Series 380~415V -50/60Hz

HP			24	26	28	30
Model			ARV-H680/SR1MV-S	ARV-H730/SR1MV-S	ARV-H785/SR1MV-S	ARV-H850/SR1MV-S
Combination		HP	24	26	28	30
Capacity	Cooling	kW	68	73	78.5	85
	Heating	kW	75	81.5	87.5	95
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	18.61	20.8	23.64	26.56
	EER	W/W	3.65	3.51	3.32	3.2
	Heating input	kW	18.99	20.79	23.97	27.14
	COP	W/W	3.95	3.92	3.65	3.5
Performance	Air Flow Volume	m³/h	29000	29000	29000	30000
	Sound Pressure level	dB(A)	43-62	43-62	43-63	43-64
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv
	Quantity		2	2	2	2
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv
	Quantity		2	2	2	2
Connection Ratio		%	50-200	50-200	50-200	50-200
Dimension (WxDxH)	Net	mm	1850×825×1760	1850×825×1760	1850×825×1760	1850×825×1760
	Packing	mm	1925×930×1930	1925×930×1930	1925×930×1930	1925×930×1930
Weight	Net	kg	379	379	379	380
	Gross	kg	402	402	402	403
Refrigerant Piping	Liquid Side	mm	φ19.05	φ19.05	φ22.2	φ22.2
	Gas Side	mm	φ35.0	φ35.0	φ35.0	φ35.0
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24

ARV 7S Series 380~415V -50/60Hz

HP			32	34	36
Model			ARV-H900/SR1MV-S	ARV-H950/SR1MV-S	ARV-H1010/SR1MV-S
Combination		HP	32	34	36
Capacity	Cooling	kW	90	95.2	101
	Heating	kW	100	106	112
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	29.51	31.73	34.01
	EER	W/W	3.05	3	2.97
	Heating input	kW	29.41	31.74	33.94
	COP	W/W	3.4	3.34	3.3
Performance	Air Flow Volume	m³/h	30000	30000	30000
	Sound Pressure level	dB(A)	43-64	43-66	43-66
Compressor	Type		DC Inv	DC Inv	DC Inv
	Quantity		2	2	2
Fan motor	Type		DC Inv	DC Inv	DC Inv
	Quantity		2	2	2
Connection Ratio		%	50-200	50-200	50-200
Dimension (WxDxH)	Net	mm	1850×825×1760	1850×825×1760	1850×825×1760
	Packing	mm	1925×930×1930	1925×930×1930	1925×930×1930
Weight	Net	kg	405	405	405
	Gross	kg	428	428	428
Refrigerant Piping	Liquid Side	mm	φ22.2	φ22.2	φ22.2
	Gas Side	mm	φ35.0	φ35.0	φ35.0
Operation Range	Cooling	°C	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24

Notes:

1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.

2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.

3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.

4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.

5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.

6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.

8.The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV 7S Series 380~415V-50/60Hz

HP			38	40	42	44	46
Model			ARV-H1088/SR1MV-S	ARV-H1138/SR1MV-S	ARV-H1185/SR1MV-S	ARV-H1239/SR1MV-S	ARV-H1295/SR1MV-S
Combination		HP	24+14	26+14	26+16	26+18	26+20
Capacity	Cooling	kW	108	113	118	123.4	129
	Heating	kW	115	122	127	132	138
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	29.13	31.32	33	35.6	38.44
	EER	W/W	3.71	3.61	3.58	3.47	3.36
	Heating input	kW	29.92	31.72	33	35.68	38.1
	COP	W/W	3.84	3.83	3.83	3.70	3.61
Performance	Air Flow Volume	m³/h	43000	43000	43000	45000	45000
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv	DC Inv
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv	DC Inv
Connection Ratio		%	50-200	50-200	50-200	50-200	50-200
Weight	Net	kg	634	634	634	634	692
	Gross	kg	672	672	672	672	730
Refrigerant Piping	Liquid Side	mm	Φ19.05	Φ19.05	Φ19.05	Φ19.05	Φ19.05
	Gas Side	mm	Φ38.1	Φ38.1	Φ38.1	Φ38.1	Φ38.1
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24	-20~24

ARV 7S Series 380~415V-50/60Hz

HP			48	50	52	54
Model			ARV-H1350/SR1MV-S	ARV-H1420/SR1MV-S	ARV-H1470/SR1MV-S	ARV-H1519/SR1MV-S
Combination		HP	26+22	26+24	26+26	36+18
Capacity	Cooling	kW	134.5	141	146	151.4
	Heating	kW	143	157	163	162
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	41	39.41	41.6	48.81
	EER	W/W	3.28	3.58	3.51	3.10
	Heating input	kW	39.96	39.78	41.58	48.83
	COP	W/W	3.58	3.93	3.92	3.33
Performance	Air Flow Volume	m³/h	45000	58000	58000	46000
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv
Connection Ratio		%	50-200	50-200	50-200	50-200
Weight	Net	kg	692	758	758	660
	Gross	kg	730	804	804	698
Refrigerant Piping	Liquid Side	mm	Φ19.05	Φ19.05	Φ19.05	Φ19.05
	Gas Side	mm	Φ38.1	Φ38.1	Φ38.1	Φ38.1
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
8.The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV 7S Series 380~415V-50/60Hz

HP			56	58	60	62
Model			ARV-H1575/SR1MV-S	ARV-H1630/SR1MV-S	ARV-H1700/SR1MV-S	ARV-H1750/SR1MV-S
Combination		HP	36+20	36+22	36+24	36+26
Capacity	Cooling	kW	157	162.5	169	174
	Heating	kW	168	174	187	194
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	51.65	54.21	52.62	54.81
	EER	W/W	3.04	3.00	3.21	3.17
	Heating input	kW	51.25	53.11	52.93	54.73
	COP	W/W	3.28	3.27	3.53	3.54
Performance	Air Flow Volume	m³/h	46000	46000	59000	59000
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv
Connection Ratio		%	50-200	50-200	50-200	50-200
Weight	Net	kg	718	718	784	784
	Gross	kg	756	756	830	830
Refrigerant Piping	Liquid Side	mm	Φ19.05	Φ19.05	Φ19.05	Φ19.05
	Gas Side	mm	Φ41.3	Φ41.3	Φ41.3	Φ41.3
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24

ARV 7S Series 380~415V-50/60Hz

HP			64	66	68	70
Model			ARV-H1800/SR1MV-S	ARV-H1865/SR1MV-S	ARV-H1915/SR1MV-S	ARV-H1967/SR1MV-S
Combination		HP	36+28	36+30	36+32	36+34
Capacity	Cooling	kW	179.5	186	191	196.2
	Heating	kW	200	207	212	218
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	57.65	60.57	63.52	65.74
	EER	W/W	3.11	3.07	3.01	2.98
	Heating input	kW	57.91	61.08	63.35	65.68
	COP	W/W	3.45	3.39	3.35	3.32
Performance	Air Flow Volume	m³/h	59000	60000	60000	60000
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv
Connection Ratio		%	50-200	50-200	50-200	50-200
Weight	Net	kg	784	785	810	810
	Gross	kg	830	831	856	856
Refrigerant Piping	Liquid Side	mm	Φ19.05	Φ19.05	Φ22.2	Φ22.2
	Gas Side	mm	Φ41.3	Φ41.3	Φ44.5	Φ44.5
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
8.The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV 7S Series 380~415V-50/60Hz

HP			72	74	76	78
Model			ARV-H2030/SR1MV-S	ARV-H2103/SR1MV-S	ARV-H2153/SR1MV-S	ARV-H2200/SR1MV-S
Combination		HP	36+36	36+24+14	36+26+14	36+26+16
Capacity	Cooling	kW	202	209	214	219
	Heating	kW	224	227	234	239
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	68.02	63.14	65.33	67.01
	EER	W/W	2.97	3.31	3.28	3.27
	Heating input	kW	67.88	63.86	65.66	66.94
	COP	W/W	3.30	3.55	3.56	3.56
Performance	Air Flow Volume	m³/h	60000	73000	73000	73000
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv
Connection Ratio		%	50-200	50-200	50-200	50-200
Weight	Net	kg	810	1039	1039	1039
	Gross	kg	856	1100	1100	1100
Refrigerant Piping	Liquid Side	mm	Φ22.2	Φ22.2	Φ22.2	Φ22.2
	Gas Side	mm	Φ44.5	Φ44.5	Φ44.5	Φ44.5
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24

ARV 7S Series 380~415V-50/60Hz

HP			80	82	84	86	88
Model			ARV-H2254/SR1MV-S	ARV-H2310/SR1MV-S	ARV-H2365/SR1MV-S	ARV-H2435/SR1MV-S	ARV-H2485/SR1MV-S
Combination		HP	36+26+18	36+26+20	36+26+22	36+26+24	36+26+26
Capacity	Cooling	kW	224.4	230	235.5	242	247
	Heating	kW	244	250	255	269	275
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	69.61	72.45	75.01	73.42	75.61
	EER	W/W	3.22	3.17	3.14	3.30	3.27
	Heating input	kW	69.62	72.04	73.9	73.72	75.52
	COP	W/W	3.50	3.46	3.45	3.64	3.64
Performance	Air Flow Volume	m³/h	75000	75000	75000	88000	88000
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv	DC Inv
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv	DC Inv
Connection Ratio		%	50-200	50-200	50-200	50-200	50-200
Weight	Net	kg	1039	1097	1097	1163	1163
	Gross	kg	1100	1158	1158	1232	1232
Refrigerant Piping	Liquid Side	mm	Φ22.2	Φ22.2	Φ22.2	Φ22.2	Φ22.2
	Gas Side	mm	Φ44.5	Φ44.5	Φ44.5	Φ44.5	Φ44.5
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24	-20~24

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
8.The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV 7S Series 380~415V-50/60Hz

HP			90	92	94	96	98
Model			ARV-H2534/SR1MV-S	ARV-H2590/SR1MV-S	ARV-H2645/SR1MV-S	ARV-H2715/SR1MV-S	ARV-H2765/SR1MV-S
Combination		HP	36+36+18	36+36+20	36+36+22	36+36+24	36+36+26
Capacity	Cooling	kW	252.4	258	263.5	270	275
	Heating	kW	274	280	286	299	306
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	82.82	85.66	88.22	86.63	88.82
	EER	W/W	3.05	3.01	2.99	3.12	3.10
	Heating input	kW	82.77	85.19	87.05	86.87	88.67
	COP	W/W	3.32	3.29	3.28	3.44	3.45
Performance	Air Flow Volume	m³/h	76000	76000	76000	89000	89000
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv	DC Inv
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv	DC Inv
Connection Ratio		%	50-200	50-200	50-200	50-200	50-200
Weight	Net	kg	1065	1123	1123	1189	1189
	Gross	kg	1126	1184	1184	1258	1258
Refrigerant Piping	Liquid Side	mm	Φ25.4	Φ25.4	Φ25.4	Φ25.4	Φ25.4
	Gas Side	mm	Φ47.6	Φ47.6	Φ47.6	Φ47.6	Φ47.6
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24	-20~24

ARV 7S Series 380~415V-50/60Hz

HP			100	102	104	106	108
Model			ARV-H2815/SR1MV-S	ARV-H2880/SR1MV-S	ARV-H2930/SR1MV-S	ARV-H2982/SR1MV-S	ARV-H3045/SR1MV-S
Combination		HP	36+36+28	36+36+30	36+36+32	36+36+34	36+36+36
Capacity	Cooling	kW	280.5	287	292	297.2	303
	Heating	kW	312	319	324	330	336
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	91.66	94.58	97.53	99.75	102.03
	EER	W/W	3.06	3.03	2.99	2.98	2.97
	Heating input	kW	91.85	95.02	97.29	99.62	101.82
	COP	W/W	3.39	3.36	3.33	3.31	3.30
Performance	Air Flow Volume	m³/h	89000	90000	90000	90000	90000
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv	DC Inv
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv	DC Inv
Connection Ratio		%	50-200	50-200	50-200	50-200	50-200
Weight	Net	kg	1189	1190	1215	1215	1215
	Gross	kg	1258	1259	1284	1284	1284
Refrigerant Piping	Liquid Side	mm	Φ25.4	Φ25.4	Φ25.4	Φ25.4	Φ25.4
	Gas Side	mm	Φ47.6	Φ47.6	Φ47.6	Φ47.6	Φ47.6
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24	-20~24

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
8.The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV 7S Series 380~415V-50/60Hz

HP			110	112	114	116	118
Model			ARV-H3105/SR1MV-S	ARV-H3155/SR1MV-S	ARV-H3220/SR1MV-S	ARV-H3270/SR1MV-S	ARV-H3320/SR1MV-S
Combination		HP	32+26+26+26	32+28+26+26	32+30+26+26	32+32+26+26	32+32+28+26
Capacity	Cooling	kW	309	314.5	321	326	331.5
	Heating	kW	345	351	358	363	369
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	91.91	94.75	97.67	100.62	103.46
	EER	WW	3.36	3.32	3.29	3.24	3.20
	Heating input	kW	91.78	94.96	98.13	100.4	103.58
	COP	WW	3.75	3.69	3.65	3.62	3.56
Performance	Air Flow Volume	m³/h	117000	117000	118000	118000	118000
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv	DC Inv
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv	DC Inv
Connection Ratio		%	50-200	50-200	50-200	50-200	50-200
Weight	Net	kg	1542	1542	1543	1568	1568
	Gross	kg	1634	1634	1635	1660	1660
Refrigerant Piping	Liquid Side	mm	Φ28.6	Φ28.6	Φ28.6	Φ28.6	Φ28.6
	Gas Side	mm	Φ54.0	Φ54.0	Φ54.0	Φ54.0	Φ54.0
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24	-20~24

ARV 7S Series 380~415V-50/60Hz

HP			120	122	124	126	128
Model			ARV-H3385/SR1MV-S	ARV-H3435/SR1MV-S	ARV-H3485/SR1MV-S	ARV-H3550/SR1MV-S	ARV-H3600/SR1MV-S
Combination		HP	32+32+30+26	32+32+32+26	32+32+32+28	32+32+32+30	32+32+32+32
Capacity	Cooling	kW	338	343	348.5	355	360
	Heating	kW	377	382	388	395	400
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	106.38	109.33	112.17	115.09	118.04
	EER	WW	3.18	3.14	3.11	3.08	3.05
	Heating input	kW	106.75	109.02	112.2	115.37	117.64
	COP	WW	3.53	3.50	3.45	3.42	3.40
Performance	Air Flow Volume	m³/h	119000	119000	119000	120000	120000
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv	DC Inv
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv	DC Inv
Connection Ratio		%	50-200	50-200	50-200	50-200	50-200
Weight	Net	kg	1569	1594	1594	1595	1620
	Gross	kg	1661	1686	1686	1687	1712
Refrigerant Piping	Liquid Side	mm	Φ28.6	Φ28.6	Φ28.6	Φ28.6	Φ28.6
	Gas Side	mm	Φ54.0	Φ54.0	Φ54.0	Φ54.0	Φ54.0
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24	-20~24

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
8.The above combined types are factory-recommended type. The combined type also can be combined at will.

ARV 7S Series 380~415V-50/60Hz

HP			130	132	134	136
Model			ARV-H3660/SR1MV-S	ARV-H3730/SR1MV-S	ARV-H3780/SR1MV-S	ARV-H3830/SR1MV-S
Combination		HP	36+36+36+22	36+36+36+24	36+36+36+26	36+36+36+28
Capacity	Cooling	kW	364.5	371	376	381.5
	Heating	kW	398	411	418	424
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	122.23	120.64	122.83	125.67
	EER	WW	2.98	3.08	3.06	3.04
	Heating input	kW	120.99	120.81	122.61	125.79
	COP	WW	3.29	3.40	3.41	3.37
Performance	Air Flow Volume	m³/h	106000	119000	119000	119000
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv
Connection Ratio		%	50-200	50-200	50-200	50-200
Weight	Net	kg	1528	1594	1594	1594
	Gross	kg	1612	1686	1686	1686
Refrigerant Piping	Liquid Side	mm	Φ28.6	Φ28.6	Φ28.6	Φ28.6
	Gas Side	mm	Φ57.2	Φ57.2	Φ57.2	Φ57.2
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24

ARV 7S Series 380~415V-50/60Hz

HP			138	122	142	144
Model			ARV-H3895/SR1MV-S	ARV-H3945/SR1MV-S	ARV-H3997/SR1MV-S	ARV-H4060/SR1MV-S
Combination		HP	36+36+36+30	36+36+36+32	36+36+36+34	36+36+36+36
Capacity	Cooling	kW	388	393	398.2	404
	Heating	kW	431	436	442	448
Electric Data	Power supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling input	kW	128.59	131.54	133.76	136.04
	EER	WW	3.02	2.99	2.98	2.97
	Heating input	kW	128.96	131.23	133.56	135.76
	COP	WW	3.34	3.32	3.31	3.30
Performance	Air Flow Volume	m³/h	120000	120000	120000	120000
Compressor	Type		DC Inv	DC Inv	DC Inv	DC Inv
Fan motor	Type		DC Inv	DC Inv	DC Inv	DC Inv
Connection Ratio		%	50-200	50-200	50-200	50-200
Weight	Net	kg	1595	1620	1620	1620
	Gross	kg	1687	1712	1712	1712
Refrigerant Piping	Liquid Side	mm	Φ28.6	Φ28.6	Φ28.6	Φ28.6
	Gas Side	mm	Φ57.2	Φ57.2	Φ57.2	Φ57.2
Operation Range	Cooling	°C	-15~55	-15~55	-15~55	-15~55
	Heating	°C	-20~24	-20~24	-20~24	-20~24

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
4.We can guarantee the operation only within 130% Combination. If you want to connect more than 130% combination, please contact us and discuss the requirement.
5.Anechoic chamber conversion value, measured in test room. During actual operation.These values are normally somewhat higher as a result of ambient conditions.
6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
7.Sound values are measured in a semi-anechoic room, at a position 1m in front of the unit and 1.3m above the floor.
8.The above combined types are factory-recommended type. The combined type also can be combined at will.



Outdoor Units

ARV Mini Series




DC Inverter Compressor

Made of rare earth permanent magnetic material, the rotor could change the motor's round speed by changing the DC voltage motor, thus overcome the electromagnetic noise and rotor loss of AC inverter compressor, then achieves high efficiency as well as low noise.

Auto Restart Function

The AC can automatically memorize the operation setting when power is cut off accidentally. It can return to previous setting when power resumes.
Recover the former operation state when power is re-stored , no need restart the unit manually.

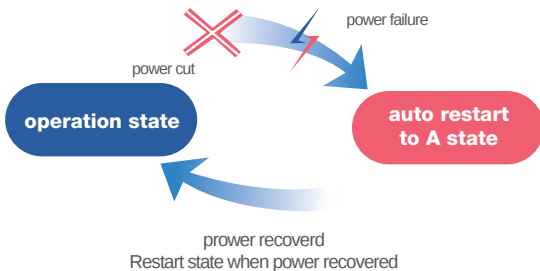

Fast Cooling/Heating Technology

The DC Inverter Compressor system reaches full load rapidly providing less temperature fluctuation and an improved living environment, bringing great user experience.

EUROVENT CERTITA CERTIFICATION



ARV Mini Series
-All DC Inverter






ARV Mini Series

Accurate Temperature Control

According to change trend of indoor ambient temperature, the unit can use PI algorithm to calculate capacity demand percentage of indoor unit, control operating frequency of compressor in real time and achieve accurate control room temperature.

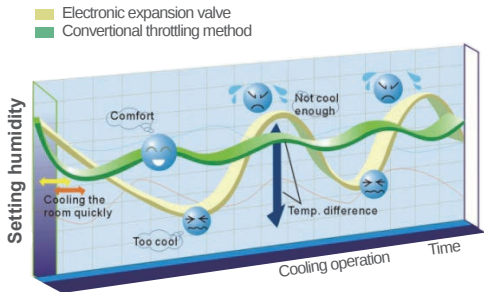


Flexible And Diversified Matching Of Indoor And Outdoor Unit

AUX offers a variety indoor units, more than 100 models of 7 types. Capacity ranges are from 2.2Kw to 14Kw. It is full compliance with residential and light commercial place. Our systems can operate up to 130% of capacity which allows any system to be designed to the customers and applications needs.


Wide Voltage Design

In country with unstable voltage, ARV can also run stably.

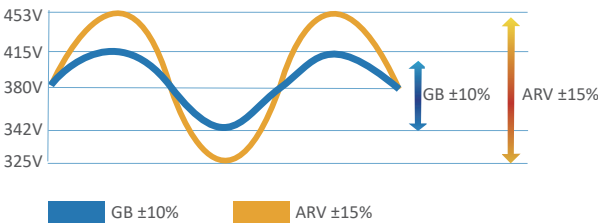

Refrigerant PCB Cooling Technology

The PCB is well cooled by the refrigerant, ensuring the system operate steadily .

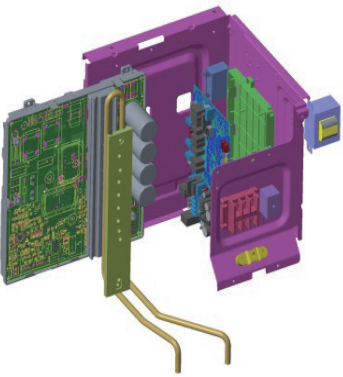

NEW type Intergraded PCB design(2→1)

The main control, drive and filter boards are all centralized in one control board, making maintenance more convenient.



ARV MINI 50/60Hz Single-Phase

Model	Outdoor		ARV-H080/NR1	ARV-H100/NR1	ARV-H120/NR1	ARV-H140/NR1	ARV-H160/NR1
Capacity	Cooling	kW	8.00	10.00	12.30	14.00	16.00
	Heating	kW	9.00	11.50	13.20	16.00	18.00
Electric Data	Power Supply	V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1
	Cooling Power Input	kW	2.30	3.00	3.25	3.95	4.80
	Heating Power Input	kW	2.40	3.20	3.41	4.05	4.80
	Cooling Current	A	10.10	13.20	14.30	17.30	21.10
	Heating Current	A	10.50	14.00	15.00	17.80	21.10
	EER		3.48	3.33	3.78	3.54	3.33
	COP		3.75	3.59	3.87	3.95	3.75
	SEER		6.20	6.10	6.10	6.10	6.10
	SCOP		4.20	4.10	4.10	4.00	4.00
Performance	Air Flow Volume	m³/h	4154	4154	7200	7200	7200
	Noise Level	dB(A)	56	56	57	57	57
Piping Limite	Level difference between IDU and ODU	m	50	50	50	50	50
	Level difference between IDU and IDU	m	10	10	15	15	15
	Between the first brance and the Farthest IDU	m	20	20	40	40	40
	Total Pipe length	m	100	100	150	150	150
Connection Ratio		%	50~130	50~130	50~130	50~130	50~130
Dimension (WxDxH)	Net	mm	970×370×800	970×370×800	940×340×1320	940×340×1320	940×340×1320
	Packing	mm	1105×495×890	1105×495×890	1080×430×1440	1080×430×1440	1080×430×1440
Weight	Net	kg	66	66	92	92	96
	Gross	kg	71	71	102	102	106
Refrigerant Type			R410a	R410a	R410a	R410a	R410a
Pipe Diameter	Liquid Side	mm(inch)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)
	Gas Side	mm(inch)	15.88(5/8)	15.88(5/8)	15.88(5/8)	15.88(5/8)	19.05(3/4)
Operation Range	Cooling	°C	-15~49	-15~49	-15~49	-15~49	-15~49
	Heating	°C	-15~27	-15~27	-15~27	-15~27	-15~27
Stuffing Quantity		unit	44/92/138	44/92/138	27/55/55	27/55/55	27/55/55

ARV MIN 50/60Hz Three-Phase

Model	Outdoor		ARV-H120/SR1DCS7	ARV-H140/SR1DCS7	ARV-H160/SR1DCS7	ARV-H220/SR1DCS7	ARV-H260/SR1DCS7
Capacity	Cooling	kW	12.30	14.00	16.00	22.40	26.00
	Heating	kW	14.00	16.00	18.00	24.50	28.50
Electric Data	Power Supply	V~,Hz,Ph	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3	380~415,50/60,3
	Cooling Power Input	kW	3.25	4.11	4.66	6.80	7.60
	Heating Power Input	kW	3.41	4.10	5.05	5.90	6.80
	Cooling Current	A	5.09	6.44	7.30	11.10	12.40
	Heating Current	A	5.34	6.42	7.91	9.60	11.10
	EER		3.78	3.41	3.43	3.29	3.42
	COP		4.11	3.90	3.56	4.15	4.19
	SEER		6.10	6.10	6.10	5.90	5.50
	SCOP		4.10	4.00	4.00	3.80	3.75
Performance	Air Flow Volume	m³/h	7200	7200	7200	11000	11000
	Noise Level	dB(A)	56	57	57	62	62
Piping Limite	Level difference between IDU and ODU	m	50	50	50	50	50
	Level difference between IDU and IDU	m	15	15	15	15	15
	Between the first brance and the Farthest IDU	m	40	40	40	40	40
	Total Pipe length	m	150	150	150	250	250
Connection Ratio		%	50~130	50~130	50~130	50~130	50~130
Dimension (WxDxH)	Net	mm	940×340×1320	940×340×1320	940×340×1320	1120×400×1540	1120×400×1540
	Packing	mm	1080×430×1440	1080×430×1440	1080×430×1440	1270×560×1710	1270×560×1710
Weight	Net	kg	101	103	103	160	160
	Gross	kg	111	113	113	175	175
Refrigerant Type			R410A	R410A	R410A	R410A	R410A
Pipe Diameter	Liquid Side	mm(inch)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)
	Gas Side	mm(inch)	19.05(3/4)	19.05(3/4)	19.05(3/4)	22.2(7/8)	22.2(7/8)
Operation Range	Cooling	°C	-15~49	-15~49	-15~49	-15~49	-15~49
	Heating	°C	-15~27	-15~27	-15~27	-15~27	-15~27
Stuffing Quantity		unit	27/55/55	27/55/55	27/55/55	17/37/37	17/37/37

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/ 19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
2.Cooling Capacity (Tropical): Indoor temperature 27°C DB/19°C WB;Outdoor temperature:46.1°C DB.
3.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
4.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
5.Anechoic chamber conversion value, measured in test room. During actual operation. These values are normally somewhat higher as a result of ambient c onditions.
6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

ARV Mini Series



Specification-ARV Mini Series 50Hz

Model	Outdoor		ARV-H220/5R1A	ARV-H280/5R1A
Capacity	Cooling	kW	22.40	26.00
	Heating	kW	24.50	28.50
Electric Data	Power Supply	V~,Hz,Ph	380~415,50,3	380~415,50,3
	Cooling Power Input	kW	7.20	8.40
	Heating Power Input	kW	6.70	7.90
	Cooling Current	A	11.60	13.50
	Heating Current	A	11.00	13.00
	EER		3.11	3.10
	COP		3.67	3.61
Performance	Air Flow Volume	m³/h	15300	15300
	Noise Level	dB(A)	60	60
Piping Limite	Level difference between IDU and ODU	m	50	50
	Level difference between IDU and IDU	m	15	15
	Between the first brance and the Farthest IDU	m	40	40
	Total Pipe length	m	250	250
Connection Ratio		%	50~130	50~130
Dimension (WxDxH)	Net	mm	1120×400×1540	1120×400×1540
	Packing	mm	1270×560×1710	1270×560×1710
Weight	Net	kg	150	150
	Gross	kg	170	170
Refrigerant Type			R410a	R410a
Pipe Diameter	Liquid Side	mm(inch)	9.52(3/8)	9.52(3/8)
	Gas Side	mm(inch)	22.22(7/8)	22.22(7/8)
Operation Range	Cooling	°C	-5~49	-5~49
	Heating	°C	-15~24	-15~24
Stuffing Quantity	20/40/40H	unit	17/37/37	17/37/37

ARV MINI 50/60Hz Single-Phase

Model	Outdoor		ARV-H80/NR1A	ARV-H100/NR1A	ARV-H120/NR1A	ARV-H140/NR1A	ARV-H160/NR1A
Capacity	Cooling	kW	8.0	10.0	12.1	14.0	15.5
	Heating	kW	9.00	12.00	14.00	16.00	18.00
Electric Data	Power Supply	V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1
	Cooling Power Input	kW	2.00	2.55	3.20	3.75	4.80
	Heating Power Input	kW	1.95	2.97	3.45	3.85	4.60
	Cooling Current	A	9.10	11.60	14.50	17.00	21.80
	Heating Current	A	8.90	13.50	15.70	17.50	20.90
	EER		4.00	3.92	3.78	3.73	3.23
	COP		4.62	4.04	4.06	4.16	3.91
	SEER		6.00	6.05	6.82	6.85	6.80
	SCOP		3.80	3.80	3.75	4.84	4.30
	Air Flow Volume	m³/h	4100	4100	4890	5100	5100
Performance	Noise Level	dB(A)	54	54	56	56	56
	Level difference between IDU and ODU	m	20	20	20	30	30
Piping Limite	Level difference between IDU and IDU	m	8	8	8	8	8
	Between the first brance and the Farthest IDU	m	20	20	20	20	20
	Total Pipe length	m	40	40	40	100	100
Connection Ratio		%	50~130	50~130	50~130	50~130	50~130
Dimension (WxDxH)	Net	mm	970×370×800	970×370×800	970×370×800	990×420×860	990×420×860
	Packing	mm	1105×495×890	1105×495×890	1105×495×890	1100×545×980	1100×545×980
Weight	Net	kg	60	60	70	80	80
	Gross	kg	64.5	64.5	75	91	91
Refrigerant Type			R410a	R410a	R410a	R410a	R410a
Pipe Diameter	Liquid Side	mm(inch)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)
	Gas Side	mm(inch)	15.88(5/8)	15.88(5/8)	15.88(5/8)	15.88(5/8)	15.88(5/8)
Operation Range	Cooling	°C	-15~49	-15~49	-15~49	-15~49	-15~49
	Heating	°C	-15~27	-15~27	-15~27	-15~27	-15~27
Stuffing Quantity	20/40/40H	unit	44/92/138	44/92/138	44/92/138	40/84/84	40/84/84

Indoor Units

Compact Cassette	48	
Cassette	49	
Wall-mounted	50	
Slim Duct	56	
Mid ESP Duct	58	
High ESP Duct	61	
Fresh Air Processing Unit	62	
Ceiling&Floor	63	



Inverter Series Cassette

FEATURES

- Auto Restart Function
- Hydrophilic Aluminum Fin
- Fast Cooling/Heating
- Low Ambient Cooling
- Intelligent Defrosting
- Remote Control
- Washable Filter
- Fire-proof Electric Box
- Built-in Drain Pump
- Digital Tube Display
- Wired Control
- Central Control
- Golden Fin
- WiFi Control
- BMS

Indoor Unit


Compact Cassette

External electronic control box

The external electric control box design of new Y model becomes more convenient during maintenance without removing the grille


Fresh Air Intake

Fresh air makes indoor air healthy and comfortable.

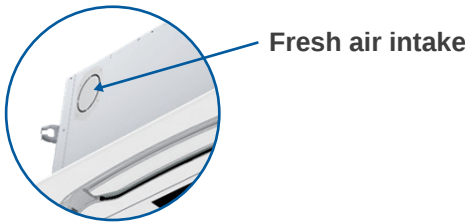

Large air flow

Optimized structure of air guide ring, Insertion depth design of guide ring through simulation technology, Ensure large air flow, improve cooling & heating comfort



Compact Cassette



Specification-50/60Hz DC fan motor


Model	Indoor		ARVCA-H28/NR1DYBA	ARVCA-H36/NR1DYBA	ARVCA-H45/NR1DYBA	ARVCA-H56/NR1DYBA
Capacity	Cooling	kW	2.8	3.6	4.5	5.6
	Heating	kW	3.0	4.3	5.0	6.3
Electric Data	Power Supply	V~,Hz,Ph	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1
	Rated Power	W	30.0	32.0	33.5	33.5
Performance	Air Flow Volume(Tu/Hi/Mid/Low)	m3/h	700/670/640/570	740/700/660/590	760/740/660/600	800/760/680/620
	Noise Level(Tu/Hi/Mid/Low)	dB(A)	42/40/38/36	43/41/39/37	44/42/40/37	45/43/40/38
Dimension (WxDxH)	Net(Body)	mm	570×570×260	570×570×260	570×570×260	570×570×260
	Packing(Body)	mm	720×650×290	720×650×290	720×650×290	720×650×290
	Net(Panel)	mm	650×650×55	650×650×55	650×650×55	650×650×55
	Packing(Panel)	mm	710×710×80	710×710×80	710×710×80	710×710×80
Weight	Net/Gross(Body)	kg	15.5/18.5	15.5/18.5	15.5/18.5	15.5/18.5
	Net/Gross(Panel)	kg	2.2/3.7	2.2/3.7	2.2/3.7	2.2/3.7
Refrigerant Type			R410A	R410A	R410A	R410A
Pipe Diameter	Liquid Side	mm(inch)	6.35	6.35	6.35	6.35
	Gas Side	mm(inch)	12.7	12.7	12.7	12.7
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	216/432/486	216/432/486	216/432/486	216/432/486

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/24°C WB.
2.Heating Capacity:Indoor temperature 20°C DB; Outdoor temperature:7°C DB/6°C WB.
3.Piping Length:Equivalent piping length: 7.5m, level difference: 0m.
4.Sound level is measured at 1.4m below the unit.
5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Cassette

Built-in Water Drainage Pump

Digital tube displays all contents: indoor temperature, setting temperature, operation mode, etc.
Clearly to check the running status, more convenient for trouble shooting.

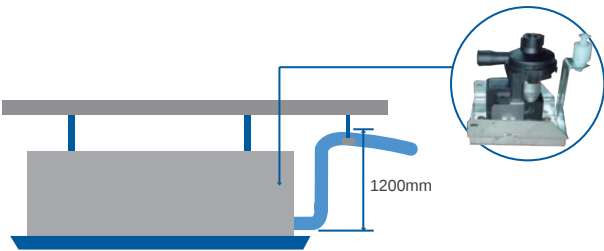

360° surround wind

Round air outlet structure design can achieve 360° air supply, covering area ↑30%




Fresh Air Intake

Fresh air makes indoor air healthy and comfortable.



Fresh air intake

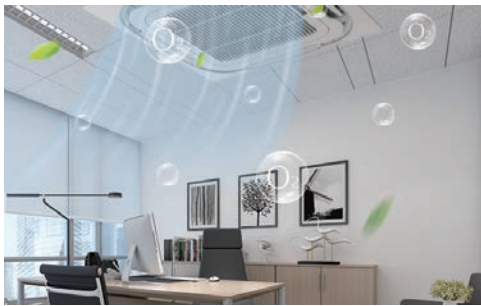

Digital Tube Display

Digital tube displays all contents: indoor temperature, setting temperature, operation mode, etc.
Clearly to check the running status, more convenient for trouble shooting.



Indoor Unit

Cassette



Specification-50/60Hz DC fan motor

Model	Indoor		ARVCA-H28/ NR1DYB	ARVCA-H36/ NR1DYB	ARVCA-H45/ NR1DYB	ARVCA-H56/ NR1DYB	ARVCA-H71/ NR1DYB	ARVCA-H80/ NR1DYB
Capacity	Cooling	kW	2.8	3.6	4.5	5.6	7.1	8.0
	Heating	kW	3.0	4.3	5.0	6.3	8.5	9.5
Electric Data	Power Supply	V~,Hz,Ph	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1
	Rated Power	W	40	45	50	57	57	57
Performance	Air Flow Volume(Hi/Mid/Low)	m3/h	900/800/700	900/800/700	900/800/700	950/850/750	1250/1040/910	1250/1040/910
	Noise Level(Hi/Mid/Low)	dB(A)	35/32/28	35/32/28	35/32/28	35/32/28	38/34/30	38/34/30
Dimension (WxDxH)	Net(Body)	mm	840x840x246	840x840x246	840x840x246	840x840x246	840x840x246	840x840x246
	Packing(Body)	mm	915x915x315	915x915x315	915x915x315	915x915x315	915x915x315	915x915x315
	Net(Panel)	mm	950x950x55	950x950x55	950x950x55	950x950x55	950x950x55	950x950x55
	Packing(Panel)	mm	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100
Weight	Net/Gross(Body)	kg	23.5/27.5	23.5/27.5	23.5/27.5	23.5/27.5	24.5/28.5	24.5/28.5
	Net/Gross(Panel)	kg	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3
Refrigerant Type			R410A	R410A	R410A	R410A	R410A	R410A
Pipe Diameter	Liquid Side	mm(inch)	6.35	6.35	6.35	6.35	9.52	9.52
	Gas Side	mm(inch)	12.7	12.7	12.7	12.7	15.88	15.88
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	77/164/175	77/164/175	77/164/175	77/164/175	77/164/175	77/164/175

Specification-50/60Hz DC fan motor

Model	Indoor		ARVCA-H90/NR1DYB	ARVCA-H100/NR1DYB	ARVCA-H112/NR1DYB	ARVCA-H125/NR1DYB	ARVCA-H140/NR1DYB
Capacity	Cooling	kW	9.0	10.0	11.2	12.5	14.0
	Heating	kW	10.0	11.2	13.0	14.0	16.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1
	Rated Power	W	57	120	120	120	127
Performance	Air Flow Volume(Hi/Mid/Low)	m3/h	1250/1040/910	1800/1440/1260	1800/1440/1260	1800/1440/1260	1800/1440/1260
	Noise Level(Hi/Mid/Low)	dB(A)	38/34/30	44/42/40	44/42/40	44/42/40	46/43/41
Dimension (WxDxH)	Net(Body)	mm	840x840x246	840x840x288	840x840x288	840x840x288	840x840x288
	Packing(Body)	mm	915x915x315	915x915x355	915x915x355	915x915x355	915x915x355
	Net(Panel)	mm	950x950x55	950x950x55	950x950x55	950x950x55	950x950x55
	Packing(Panel)	mm	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100
Weight	Net/Gross(Body)	kg	24.5/28.5	27/31	27/31	27/31	30.5/34.5
	Net/Gross(Panel)	kg	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3
Refrigerant Type			R410A	R410A	R410A	R410A	R410A
Pipe Diameter	Liquid Side	mm(inch)	9.52	9.52	9.52	9.52	9.52
	Gas Side	mm(inch)	15.88	15.88	15.88	15.88	15.88
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	77/164/175	77/164/175	77/164/175	77/164/175	77/164/175

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB;Outdoor temperature:35°C DB/24°C WB.
2.Heating Capacity:Indoor temperature 20°C DB;Outdoor temperature:7°C DB/6°C WB.
3.Piping Length:Equivalent piping length: 7.5m,Level difference: 0m.
4.Sound level is measured at 1.4m below the unit.
5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Cassette




Specification-50Hz AC fan motor

Model	Indoor		ARVCA-H28/4R1YB	ARVCA-H36/4R1YB	ARVCA-H45/4R1YB	ARVCA-H56/4R1YB	ARVCA-H71/4R1YB	ARVCA-H80/4R1YB
Capacity	Cooling	kW	2.8	3.6	4.5	5.6	7.1	8.0
	Heating	kW	3.2	4.3	5.0	6.3	8.0	9.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1
	Rated Power	W	80	80	80	80	100	100
Performance	Air Flow Volume(Hi/Mid/Low)	m3/h	900/850/750	900/850/750	900/850/750	950/850/750	1250/1040/910	1250/1040/910
	Noise Level(Hi/Mid/Low)	dB(A)	36/34/33	36/34/33	36/34/33	36/34/33	43/39/37	43/39/37
Dimension (WxDxH)	Net(Body)	mm	840x840x246	840x840x246	840x840x246	840x840x246	840x840x246	840x840x246
	Packing(Body)	mm	915x915x315	915x915x315	915x915x315	915x915x315	915x915x315	915x915x315
	Net(Panel)	mm	950x950x55	950x950x55	950x950x55	950x950x55	950x950x55	950x950x55
	Packing(Panel)	mm	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100
Weight	Net/Gross(Body)	kg	24/28	24/28	24/28	24/28	25/29	25/29
	Net/Gross(Panel)	kg	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3
Refrigerant Type			R410A	R410A	R410A	R410A	R410A	R410A
Pipe Diameter	Liquid Side	mm(inch)	6.35	6.35	6.35	6.35	9.52	9.52
	Gas Side	mm(inch)	12.7	12.7	12.7	12.7	15.88	15.88
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	77/164/175	77/164/175	77/164/175	77/164/175	77/164/175	77/164/175

Specification-50Hz AC fan motor

Model	Indoor		ARVCA-H90/4R1YB	ARVCA-H100/4R1YB	ARVCA-H112/4R1YB	ARVCA-H125/4R1YB	ARVCA-H140/4R1YB
Capacity	Cooling	kW	9.0	10.0	11.2	12.5	14.0
	Heating	kW	10.0	11.2	12.8	14.0	16.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1
	Rated Power	W	100	190	190	190	190
Performance	Air Flow Volume(Hi/Mid/Low)	m3/h	1400/1200/1000	1850/1440/1260	1850/1440/1260	1850/1440/1260	1850/1440/1260
	Noise Level(Hi/Mid/Low)	dB(A)	43/39/37	45/40/39	45/40/39	45/40/39	46/41/39
Dimension (WxDxH)	Net(Body)	mm	840x840x246	840x840x288	840x840x288	840x840x288	840x840x288
	Packing(Body)	mm	915x915x315	915x915x355	915x915x355	915x915x355	915x915x355
	Net(Panel)	mm	950x950x55	950x950x55	950x950x55	950x950x55	950x950x55
	Packing(Panel)	mm	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100	1000x1000x100
Weight	Net/Gross(Body)	kg	25/29	28.5/32.5	28.5/32.5	28.5/32.5	31/35
	Net/Gross(Panel)	kg	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3	5.7/8.3
Refrigerant Type			R410A	R410A	R410A	R410A	R410A
Pipe Diameter	Liquid Side	mm(inch)	9.52	9.52	9.52	9.52	9.52
	Gas Side	mm(inch)	15.88	15.88	15.88	15.88	15.88
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	77/164/175	77/164/175	77/164/175	77/164/175	77/164/175

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/24°C WB.
2.Heating Capacity:Indoor temperature 20°C DB; Outdoor temperature:7°C DB/6°C WB.
3.Piping Length:Equivalent piping length: 7.5m,l evel difference: 0m.
4.Sound level is measured at 1.4m below the unit.
5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

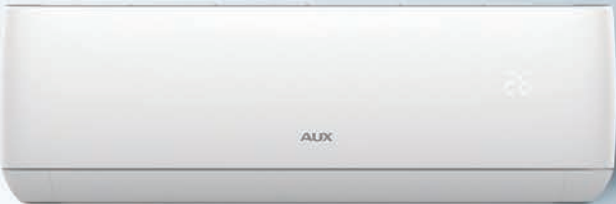

Wall-mounted

FEATURES



Remote Control



Intelligent Defrosting



Sleep Mode



Fast Cooling/Heating



Anti-Cold-Air



Digital Tube Display



Wired Control



Central Control



WIFI Control

optional standard


Wall-mounted

A Variety Of Panels

A variety of panels can be chosen

Wired Control

Remote controller is standard, and wired controller is optional. Wired controller can be fixed on the wall to avoid mislaying. It's mainly used for commercial zone and makes air conditioner control more convenient.

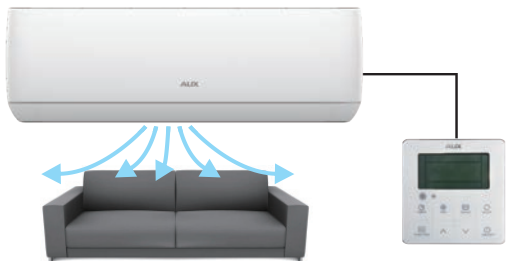

2 Ways Draining Connection

Both left and right sides of unit are possible for drainage pipe connection, easy for installation.




Convenient Installation

EXV is built-in the indoor unit,compact size.Adopts new type fixing plate,stable and easy to install.

Superb craftsmanship

0.3mm seam, appearance integration

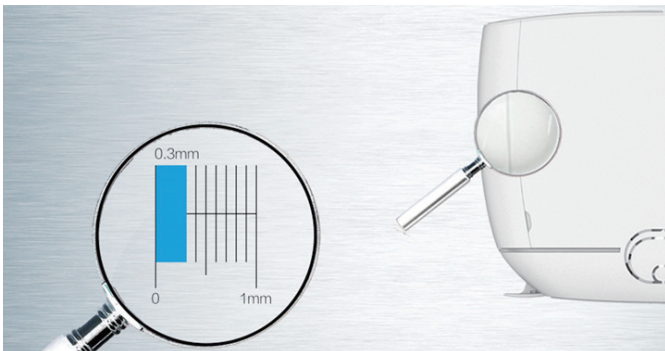

Wall-mounted



J type

Specification- 50/60Hz DC fan motor (J type)

Model	Indoor		ARVWM-H022/NR1DJA	ARVWM-H028/NR1DJA	ARVWM-H036/NR1DJA
Capacity	Cooling	kW	2.2	2.8	3.6
	Heating	kW	2.6	3.2	4.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1
	Rated Power	W	20	20	20
Performance	Air Flow Volume(Hi/Mid/Low)	m³/h	520/460/400	520/460/400	520/460/400
	Noise Level(Hi/Mid/Low)	dB(A)	38/33/27	38/33/27	38/33/27
Dimension (WxHxD)	Net	mm	881x294x194	881x294x194	881x294x194
	Packing	mm	965×370×282	965×370×282	965×370×282
Weight	Net/Gross	kg	10.5/13	10.5/13	10.5/13
	Liquid Side	mm(inch)	6.35(1/4)	6.35(1/4)	6.35(1/4)
Pipe Diameter	Gas Side	mm(inch)	9.52(3/8)	9.52(3/8)	9.52(3/8)
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	316/647/737	316/647/737	316/647/737

Specification- 50/60Hz DC fan motor (J type)

Model	Indoor		ARVWM-H045/NR1DJA	ARVWM-H056/NR1DJA	ARVWM-H071/NR1DJA
Capacity	Cooling	kW	4.5	5.6	7.1
	Heating	kW	5.0	6.3	8.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1
	Rated Power	W	30	30	40
Performance	Air Flow Volume(Hi/Mid/Low)	m³/h	850/750/660	850/750/660	1000/900/800
	Noise Level(Hi/Mid/Low)	dB(A)	42/38/34	42/38/34	44/40/37
Dimension (WxHxD)	Net	mm	997x316x227	997x316x227	1132x330x232
	Packing	mm	1067x385x312	1067x385x312	1205x400x317
Weight	Net/Gross	kg	13.5/16.5	13.5/16.5	15.5/19
	Liquid Side	mm(inch)	6.35(1/4)	6.35(1/4)	6.35(1/4)
Pipe Diameter	Gas Side	mm(inch)	12.7(1/2)	12.7(1/2)	15.88(5/8)
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	241/498/563	241/498/563	176/410/465

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB;Outdoor temperature:35°C DB/24°C WB.
2.Heating Capacity:Indoor temperature 20°C DB;Outdoor temperature:7°C DB/6°C WB.
3.Piping Length:Equivalent piping length: 7.5m,I evel difference: 0m.
4.Sound level is measured 1m below the air outlet horizontally and vertically.
5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Inverter Series Duct

FEATURES



Auto Restart Function



Hydrophilic Aluminum Fin



Fast Cooling/Heating



Low Ambient Cooling



Intelligent Defrosting



Long-term Filter



Wired Control



Remote Control



Central Control



Golden Fin



WIFI Control



BMS


optional

standard

Slim Duct


2 Ways Draining Connection

There two outlet in left and right, both left and right side of unit are possible for drainage hose connection, easy for installation.

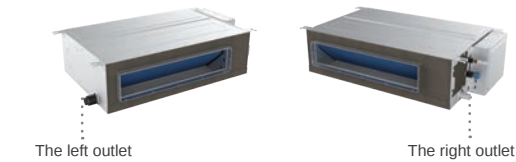

Built-in Water Pump Optional

The built-in pump can lift condensing water up to 700mm high from the drainage pan installation.

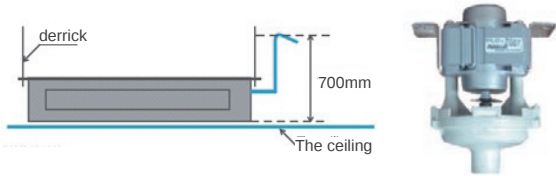


Ultra Slim Design

The thickness is only 200mm, save installation space.




Air Outlet Panel Options

Digital tube displays all contents: indoor temperature, setting temperature, operation mode, etc. Clearly to check the running status, more convenient for trouble shooting.




Flexible Air Intake Options

Air intake from rear as standard, from bottom is optional. The size of the plate from bottom is the same as the flange from back, which makes it convenient to change installation style due to different decoration requirements.

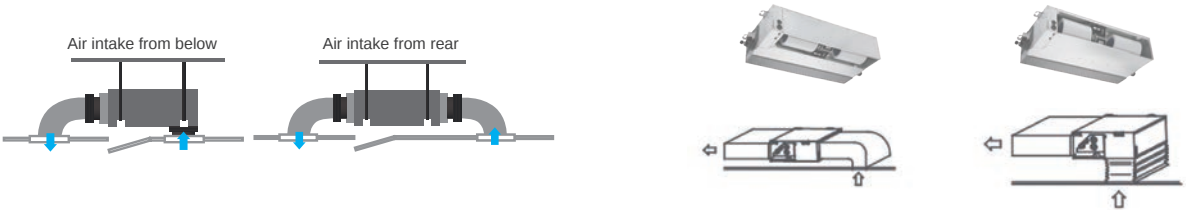

Silence Operation

Innovative centrifugal fan for large diameter and a new design of the spiral duct system equipped with high-quality motor at the same time, making the air supply quieter and smoother.

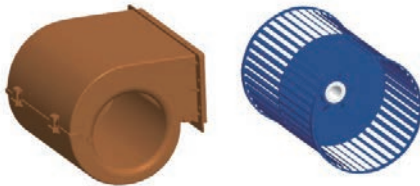

Fan Motor Options

Choose either AC or DC fan motors.

Slim Duct



Y type

Specification Y Type - 50/60Hz DC fan motor

Model	Indoor		ARVLD-H22/NR1DY	ARVLD-H28/NR1DY	ARVLD-H36/NR1DY	ARVLD-H45/NR1DY	ARVLD-H56/NR1DY	ARVLD-H71/NR1DY
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6	7.1
	Heating	kW	2.6	3.2	4.0	5.0	6.3	8.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1	220~240,50(60),1
	Rated Power	W	40	40	40	90	90	110
Performance	Air Flow Volume(Hi/Mi/Lo)	m³/h	480/380/330	480/380/330	500/410/350	730/590/500	730/590/500	900/710/590
	Noise Level(Hi/Mid/Low)	dB(A)	32/28/26	32/28/26	33/29/27	34/30/28	34/30/28	34/30/28
	External Static Pressure(ESP)	Pa	13(0~50)	13(0~50)	13(0~50)	13(0~50)	13(0~50)	13(0~50)
Dimension (WxDxH)	Net	mm	700x470x200	700x470x200	700x470x200	1000x470x200	1000x470x200	1300x470x200
	Packing	mm	1005x580x275	1005x580x275	1005x580x275	1305x580x275	1305x580x275	1610x580x275
Weight		kg	18.5/22	18.5/22	19/22.5	23.5/28	23.5/28	28.5/33
Pipe Diameter	Liquid Side	mm(inch)	6.35(1/4)	6.35(1/4)	6.35(1/4)	6.35(1/4)	6.35(1/4)	9.52(3/8)
	Gas Side	mm(inch)	9.52(3/8)	9.52(3/8)	12.7(1/2)	12.7(1/2)	12.7(1/2)	15.88(5/8)
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	176/368/414	176/368/414	176/368/414	136/288/324	136/288/324	104/232/261

Specification Y Type - 50Hz AC fan motor


Model	Indoor		ARVLD-H22/4R1Y	ARVLD-H28/4R1Y	ARVLD-H36/4R1Y	ARVLD-H45/4R1Y	ARVLD-H56/4R1Y	ARVLD-H71/4R1Y
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6	7.1
	Heating	kW	2.6	3.2	4.0	5	6.3	8
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1
	Rated Power	W	25	25	25	35	35	45
Performance	Air Flow Volume	m³/h	550	550	600	850	850	1150
	Noise Level	dB(A)	32	32	33	34	34	34
	External Static Pressure(ESP)	Pa	10(30)	10(30)	10(30)	10(30)	10(30)	10(30)
Dimension (WxDxH)	Net	mm	700x470x200	700x470x200	700x470x200	1000x470x200	1000x470x200	1300x470x200
	Packing	mm	1005x580x275	1005x580x275	1005x580x275	1305x580x275	1305x580x275	1610x580x275
Weight		kg	18.5/22	18.5/22	19/23	23.5/28	23.5/28	29/34
Pipe Diameter	Liquid Side	mm(inch)	6.35(1/4)	6.35(1/4)	6.35(1/4)	6.35(1/4)	6.35(1/4)	9.52(3/8)
	Gas Side	mm(inch)	9.52(3/8)	9.52(3/8)	12.7(1/2)	12.7(1/2)	12.7(1/2)	15.88(5/8)
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	176/368/414	176/368/414	176/368/414	136/288/324	136/288/324	104/232/261

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/24°C WB.
2.Heating Capacity:Indoor temperature 20°C DB; Outdoor temperature:7°C DB/6°C WB.
3.Piping Length:Equivalent piping length: 7.5m,level difference: 0m.
4.Sound level is measured at 1.4m below the unit.
5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Mid ESP Duct


Flexible Air Intake Options

Air intake from rear as standard, from bottom is optional.
The size of the plate from bottom is the same as the flange from back, which makes it convenient to change installation style according to different decoration requirements.

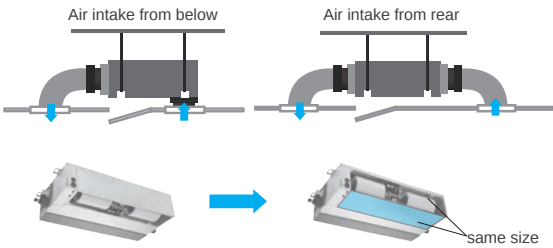


Built-in Water Pump (Optional)

The built-in pump can lift condensing water up to 1200mm high from the drainage pan.

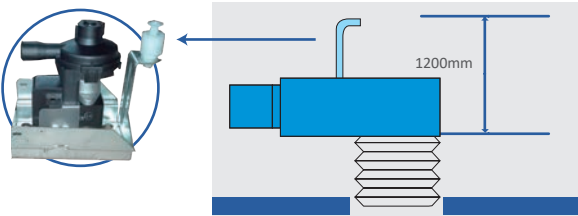

Applicable To A Variety Of Room Types

Specific ESP design can be applied to various room types easily, like rooms of L type or U type; the air outlet can be set separately from the indoor unit, so the air flow can be equally distributed even the room is in irregular structure.

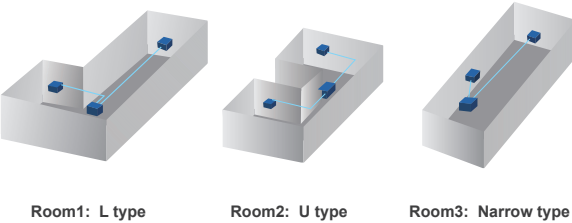

Fresh air intake function

Reserved fresh air intake hole. It is available for connecting fresh air duct.
It is allowed max. 10% fresh air for the indoor unit.



ESP meet kinds application

Widest ESP range (0-150Pa,only for DC series) with possibility to change ESP by controller and meet different kinds application like apartment, villa...



Mid ESP Duct



M type

Specification-50/60HZ DC fan motor

Model	Indoor		ARVMD-H45/NR1DM	ARVMD-H56/NR1DM	ARVMD-H71/NR1DM	ARVMD-H80/NR1DM	ARVMD-H90/NR1DM
Capacity	Cooling	kW	4.5	5.6	7.1	8.0	9.0
	Heating	kW	5.6	6.3	8.0	9.0	10.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1
	Rated Power	W	110	110	125	125	150
Performance	Air Flow Volume(TuHi/Mid/Low)m³/h		1000/920/790/700	1000/920/790/700	1680/1350/1100/950	1680/1350/1100/950	1710/1400/1120/950
	Noise Level(Hi/Mid/Low)	dB(A)	39/37/35	39/37/35	40/38/36	41/39/37	41/39/37
	External Static Pressure(ESP)	Pa	50(0-150)	50(0-150)	50(0-150)	50(0-150)	50(0-150)
Dimension (WxDxH)	Net	mm	1000x700x245	1000x700x245	1000x700x245	1000x700x245	1000x700x245
	Packing	mm	1230*830*300	1230*830*300	1230*830*300	1230*830*300	1230*830*300
Weight	Net/Gross	kg	30/36	30/36	30/36	30/36	32/38
Pipe Diameter	Liquid Side	mm(inch)	9.52	9.52	9.52	9.52	9.52
	Gas Side	mm(inch)	15.88	15.88	15.88	15.88	15.88
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	72/151/164	72/151/164	72/151/164	72/151/164	72/151/164

Specification-50/60HZ DC fan motor

Model	Indoor		ARVMD-H100/NR1DM	ARVMD-H112/NR1DM	ARVMD-H125/NR1DM	ARVMD-H140/NR1DM	ARVMD-H150/NR1DM
Capacity	Cooling	kW	10.0	11.2	12.5	14.0	15.0
	Heating	kW	11.2	12.5	14.0	16.0	17.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1	220~240,50/60,1
	Rated Power	W	150	230	230	230	250
Performance	Air Flow Volume(TuHi/Mid/Low)m³/h		1710/1400/1120/950	2300/1900/1600/1400	2300/1900/1600/1400	2300/1900/1600/1400	2400/2000/1700/1500
	Noise Level(Hi/Mid/Low)	dB(A)	42/40/38	44/42/40	44/42/40	44/42/40	45/43/41
	External Static Pressure(ESP)	Pa	50(0-150)	50(0-150)	50(0-150)	50(0-150)	50(0-150)
Dimension (WxDxH)	Net	mm	1000x700x245	1400×700×245	1400×700×245	1400×700×245	1400×700×245
	Packing	mm	1230*830*300	1630x830x300	1630x830x300	1630x830x300	1630x830x300
Weight	Net/Gross	kg	32/38	41/48	41/48	41/48	41/48
Pipe Diameter	Liquid Side	mm(inch)	9.52	9.52	9.52	9.52	9.52
	Gas Side	mm(inch)	15.88	15.88	15.88	15.88	15.88
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	72/151/164	49/98/112	49/98/112	49/98/112	49/98/112

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/ 19°C WB;Outdoor temperature:35°C DB/ 24°C WB.
2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
4.Sound level is measured at 1.4m below the unit.
5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Mid ESP Duct



M type

Specification-50Hz AC fan motor

Model	Indoor		ARVMD-H45/4R1M	ARVMD-H56/4R1M	ARVMD-H71/4R1M	ARVMD-H80/4R1M	ARVMD-H90/4R1M
Capacity	Cooling	kW	4.5	5.6	7.1	8.0	9.0
	Heating	kW	5.6	6.3	8.0	9.5	10.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1
	Rated Power	W	215	215	215	215	220
Performance	Air Flow Volume(TuHi/Mid/Low)m³/h		1000/800/660/520	1000/800/660/520	1500/1200/930/730	1500/1200/930/730	1500/1210/950/750
	Noise Level(Hi/Mid/Low)	dB(A)	42/39/36	42/39/36	43/40/37	43/40/37	44/41/38
	External Static Pressure(ESP)	Pa	50	50	50	50	50
Dimension (WxDxH)	Net	mm	1000x700x245	1000x700x245	1000x700x245	1000x700x245	1000x700x245
	Packing	mm	1230*830*300	1230*830*300	1230*830*300	1230*830*300	1230*830*300
Weight	Net/Gross	kg	30/36	30/36	30/36	30/36	32/38
Pipe Diameter	Liquid Side	mm(inch)	9.52	9.52	9.52	9.52	9.52
	Gas Side	mm(inch)	15.88	15.88	15.88	15.88	15.88
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	72/151/164	72/151/164	72/151/164	72/151/164	72/151/164

Specification-50Hz AC fan motor

Model	Indoor		ARVMD-H100/4R1M	ARVMD-H112/4R1M	ARVMD-H125/4R1M	ARVMD-H140/4R1M	ARVMD-H150/4R1M
Capacity	Cooling	kW	10.0	11.2	12.5	14.0	15.0
	Heating	kW	11.2	12.5	14.0	15.5	16.5
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1
	Rated Power	W	220	310	310	310	310
Performance	Air Flow Volume(TuHi/Mid/Low)m³/h		1500/1210/950/750	2100/1870/1550/1320	2100/1870/1550/1320	2100/1870/1550/1320	2100/1870/1550/1320
	Noise Level(Hi/Mid/Low)	dB(A)	44/41/38	45/42/39	45/42/39	45/42/39	46/43/40
	External Static Pressure(ESP)	Pa	50	50	50	50	50
Dimension (WxDxH)	Net	mm	1000x700x245	1400×700×245	1400×700×245	1400×700×245	1400×700×245
	Packing	mm	1230*830*300	1630x830x300	1630x830x300	1630x830x300	1630x830x300
Weight	Net/Gross	kg	32/38	43/50	43/50	43/50	43/50
Pipe Diameter	Liquid Side	mm(inch)	9.52	9.52	9.52	9.52	9.52
	Gas Side	mm(inch)	15.88	15.88	15.88	15.88	15.88
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	72/151/164	49/98/112	49/98/112	49/98/112	49/98/112


Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/ 19°C WB; Outdoor temperature:35°C DB/ 24°C WB.
2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature:7°C DB/ 6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
4.Sound level is measured at 1.4m below the unit.
5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

High ESP Duct



Long Distance Air Supply

High ESP makes the air supply distance up to 50m.

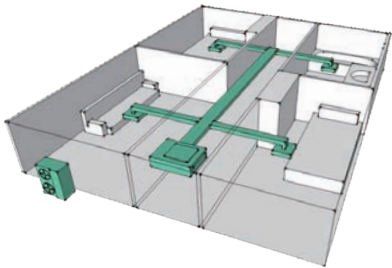

Specification-50Hz AC fan motor (196Pa)

Model	Indoor		ARVHD-H112/4R1A	ARVHD-H125/4R1A	ARVHD-H140/4R1A	ARVHD-H150/4R1A
Capacity	Cooling	kW	11.2	12.5	14.0	15.0
	Heating	kW	12.8	13.3	15.0	16.0
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1
	Rated Power	W	600	600	600	600
Performance	Air Flow Volume(Hi/Mid/Low)	m³/h	2000/1600/1400	2000/1600/1400	2000/1600/1400	2000/1600/1400
	Noise Level(Hi/Mid/Low)	dB(A)	60/57/51	60/57/51	60/57/51	60/57/51
	External Static Pressure(ESP)	Pa	196	196	196	196
Dimension (WxDxH)	Net	mm	1200x719x380	1200x719x380	1200x719x380	1200x719x380
	Packing	mm	1235x760x415	1235x760x415	1235x760x415	1235x760x415
Weight	Net/Gross	kg	56/59	56/59	56/59	56/59
	Liquid Side	mm(inch)	9.52	9.52	9.52	9.52
Pipe Diameter	Gas Side	mm(inch)	19.05	19.05	19.05	19.05
	Drainage	mm	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	68/147/168	68/147/168	68/147/168	68/147/168

Specification-50/60Hz DC fan motor

Model	Indoor		ARVHD-H220/NR1DC	ARVHD-H280/NR1DC
Capacity	Cooling	kW	22.4	28
	Heating	kW	25	31.5
Electric Data	Power Supply	V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1
	Rated Power	W	1200	1200
Performance	Air Flow Volume	m³/h	4400	4400
	Noise Level	dB(A)	57	57
	External Static Pressure(ESP)	Pa	170(30-250)	170(30-250)
Dimension (WxDxH)	Net	mm	1388x715x480	1388x715x480
	Packing	mm	1540x810x610	1540x810x610
Weight	Net/Gross	kg	99/120	99/120
	Liquid Side	mm(inch)	12.7(1/2)	12.7(1/2)
Pipe Diameter	Gas Side	mm(inch)	22.2(7/8)	22.2(7/8)
	Drainage	mm	OD33.5	OD33.5
Stuffing Quantity	20/40/40H	unit	30/63/84	30/63/84


Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/ 28°C WB.
2.Heating Capacity: Indoor temperature 20°C DB; Outdoor temperature: 7°C DB/ 6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, l evel difference: 0m.
4.Sound level is measured at 1.4m below the unit.
5.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Fresh Air Processor




Innovative Air Supply Technology For Excellent Room Temperature Control

Fall all models, return air bellow and air filter are standard configuration.

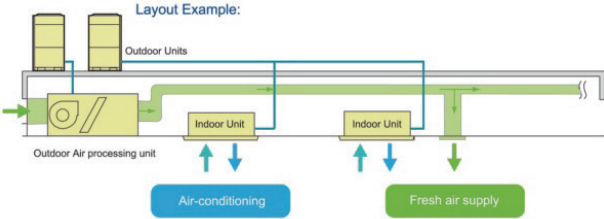


Long Distance Air Supply

High ESP makes the air supply distance up to 50m.

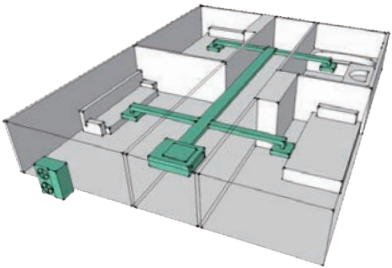

Applicable To A Variety Of Room Types

Specific ESP design can be applied to various room types easily, like rooms of L type or U type; the air outlet can be set separately from the indoor unit, so the air flow can be equally distributed even the room is in irregular structure.

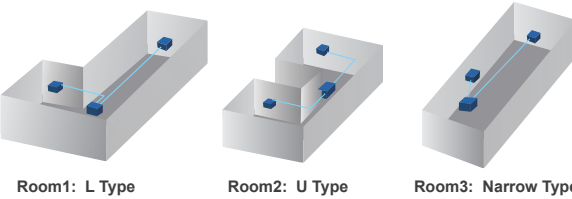

Specification-50/60Hz DC/AC fan motor

Model	Indoor		ARVFA-H220/NR1DC	ARVFA-H280/NR1DC	ARVFA-H450/5R1A	ARVFA-H560/5R1A
Capacity	Cooling	kW	22.4	28.0	45.0	56.0
	Heating	kW	18.0	22.0	49.5	61.5
Electric Data	Power Supply	V~,Hz,Ph	220~240,50/60,1	220~240,50/60,1	380~415,50/60,3	380~415,50/60,3
	Rated Power	W	900	900	1520	1520
Performance	Air Flow Volume	m³/h	3200	3200	4000	5000
	Noise Level	dB(A)	55	55	57	59
	External Static Pressure(ESP)	Pa	220	220	220	220
Dimension (WxDxH)	Net	mm	1388×715×480	1388×715×480	1820×990×855	2115×990×855
	Packing	mm	1540×810×610	1540×810×610	1935×1025×1015	2225×1025×1015
Weight	Net/Gross	kg	99/120	99/120	150/170	225/255
	Liquid Side	mm(inch)	12.7(1/2)	12.7(1/2)	12.7×2	12.7×2
Pipe Diameter	Gas Side	mm(inch)	22.2(7/8)	22.2(7/8)	22.2×2	22.2×2
	Drainage	mm	OD33.5	OD33.5	DN25	DN25
Stuffing Quantity	20/40/40H	unit	30/63/84	30/63/84	12/24/24	12/24/24

Notes:
1.Cooling Capacity: Outdoor temperature 35°C DB/28°C WB.
2.Heating Capacity: Outdoor temperature 7°C DB/6°C WB.
3.Piping Length: Equivalent piping length: 7.5m, level difference: 0m.
4.Sound level is measured at 1.4m below the unit.
5.The above design and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.
Connection Conditions:
When only outdoor-air processing units are connected, the total capacity of the outdoor-air processing units must be within 50%~100% of the outdoor units.
When outdoor-air processing units and other type indoor units are connected, the total capacity of the outdoor-air processing units must not exceed 30% of the outdoor units.

Ceiling&Floor



FEATURES

■ optional ■ standard

- Auto Restart Function
- Sleep Mode
- Fast Cooling/Heating
- Long-term Filter
- Intelligent Defrosting
- 3D Air Flow
- Anti-Cold-Air
- Remote Control
- Low Ambient Cooling
- Silent
- Wired Control
- Central Control
- Golden Fin
- WIFI Control
- BMS

Inverter Series

Ceiling&Floor




Anti-condensation

Flocking design, good thermal insulation effect, avoid large temperature difference, anti-condensation



Bigger Air Flow Volume

Innovative centrifugal fan with larger diameter, supply bigger air flow volume and lower noise.

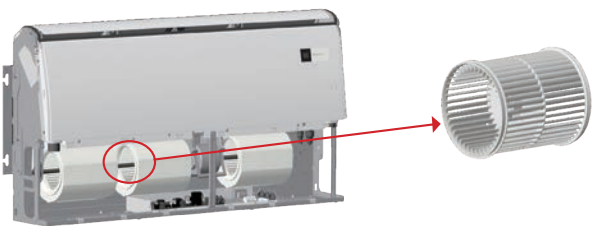


Fresh air

Fresh air intake design to improve air quality.



The independent electric box lid

Easy to connect power line and controller line don't need to disassemble the electric box lid when installation

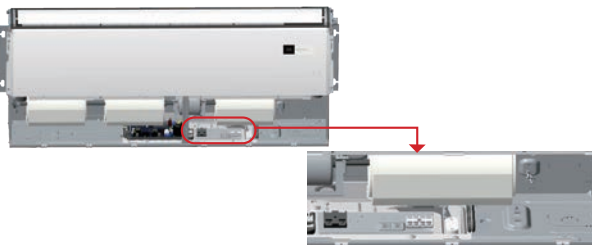

Easy drainage

Left and right water outlet design of water connection plate, flexible for installation site.



Ceiling&Floor



F Type

Specification-50/60Hz DC fan motor

Model	Indoor		ARVCF-H45/NR1DF	ARVCF-H56/NR1DF	ARVCF-H71/NR1DF	ARVCF-H80/NR1DF
Capacity	"Cooling Heating"	kW	4.5	5.6	7.1	8.0
		kW	5.0	6.3	8.0	9.0
Electric Data	Power Supply	V~,Hz,Ph	220-240V,50/60,1	220-240V,50/60,1	220-240V,50/60,1	220-240V,50/60,1
	Rated Power	W	40	40	40	70
Performance	Air Flow Volume (Tu/Hi/Mid/Low/Sl)	m³/h	940/895/700/650/600	940/895/700/650/600	940/895/700/650/600	1300/1245/1020/930/840
	Noise Level(Tu/Hi/Mi/Lo/Sl)	dB(A)	42/41/38/37/36	42/41/38/37/36	42/41/38/37/36	43/42/39/38/37
Dimension (W×D×H)	Net	mm	1000×690×235	1000×690×235	1000×690×235	1280×690×235
	Packing	mm	1080×770×325	1080×770×325	1080×770×325	1360×770×325
Weight	Net	kg	29/33.5	29/33.5	29/33.5	35.5/41
Pipe Diameter	Liquid Side	mm(inch)	6.35(1/4)	6.35(1/4)	6.35(1/4)	9.52(3/8)
	Gas Side	mm(inch)	12.7(1/2)	12.7(1/2)	12.7(1/2)	15.88(5/8)
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	112/224/264	112/224/264	112/224/264	84/175/200

Specification-50/60Hz DC fan motor

Model	Indoor		ARVCF-H90/NR3DF	ARVCF-H112/NR4DF	ARVCF-H125/NR5DF	ARVCF-H140/NR6DF
Capacity	Cooling/Heating	kW	9.0	11.2	12.5	14.0
		kW	11.0	12.8	14.0	15.0
Electric Data	Power Supply	V~,Hz,Ph	220-240V,50/60,1	220-240V,50/60,1	220-240V,50/60,1	220-240V,50/60,1
	Cooling/Heating Power Input	W	70	120	120	120
Performance	Air Flow Volume (Tu/Hi/Mid/Low/Sl)	m³/h	1300/1245/1020/930/840	2040/1890/1740/1560/1440	2040/1890/1740/1560/1440	2040/1890/1740/1560/1440
	Noise Level(Tu/Hi/Mi/Lo/Sl)	dB(A)	43/42/39/38/37	50/49/45/43/41	50/49/45/43/41	50/49/45/43/41
Dimension (W×D×H)	Net	mm	1280×690×235	1600×690×235	1600×690×235	1600×690×235
	Packing	mm	1360×770×325	1680×770×325	1680×770×325	1680×770×325
Weight	Net/Gross	kg	35.5/41	42/49	42/49	42/49
Pipe Diameter	Liquid Side	mm(inch)	9.52(3/8)	9.52(3/8)	9.52(3/8)	9.52(3/8)
	Gas Side	mm(inch)	15.88(5/8)	15.88(5/8)	15.88(5/8)	15.88(5/8)
	Drainage	mm(inch)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)	R3/4in(DN20)
Stuffing Quantity	20/40/40H	unit	84/175/200	70/147/168	70/147/168	70/147/168

Notes:
1.Cooling Capacity: Indoor temperature 27°C DB/19°C WB; Outdoor temperature:35°C DB/24°C WB.
2.Heating Capacity:Indoor temperature 20°C DB;Outdoor temperature:7°C DB/6°C WB.
3.Piping Length:Equivalent piping length: 7.5m ,level difference: 0m.
4.Floor standing:Sound level is measured 1m from air-outlet in horizontal distance, 1m above the floor in vertical distance.
5.Ceiling mounted: Sound level is measured 1m from air-outlet in horizontal distance,1m from air-outlet in vertical distance.
6.The above designs and specifications are subject to change without prior notice. Final specifications please refer to technical specification provided by sales representative.

Control System

Remote Controller	67
Wired Controller	68
Centralized Controllers	71
Centralized Controller Software	74
BMS System	78
Wireless Network Control	79
Accessories	
AHU Kit	80

Remote Controller

YK-L

1 ON/OFF
2 Fan Speed Setting HIGH/MED/LOW/AUTO
3 Temperature-Setting /Timer Range Setting
4 Cooling Mode
5 Heating Mode
6 Vertical Swing/Horizontal Swing
7 Mode Setting AUTO/COOL/DRY/HEAT/FAN
8 Turbo Wind
9 Health Function
10 Silence Function

YK-K

11 Sleep Function
12 Timer On/Off
13 I Feel Function
14 LED Display On/Off
15 Anti-fungus Function
16 Clean Function
17 Auxiliary Electric Heating
18 Spot Swing
19 Economic Function

*YK-L -for commissioning

Function

1. Background light
- The background light allows users to operate the device in a dark room. The device lights up when a button is pressed, and turns off when a given operation is completed.
2. Addresses setting
- Besides the machine's auto addressing function, users can set the indoor unit's address on the remote controller YK-L.

Specifications

Model		
Dimesion (WxHxD) (mm)	52x160x25(max)	50x140x28.5(max)
Power(V)	3V(1.5V×2)	3V(1.5V×2)


Wired Controller



Features

Built-In Remote Signal Receiver

A signal receiver is built-in the remote controller. Signal from remote controller can be received by wired controller, so the system status could be adjusted using a remote controller.

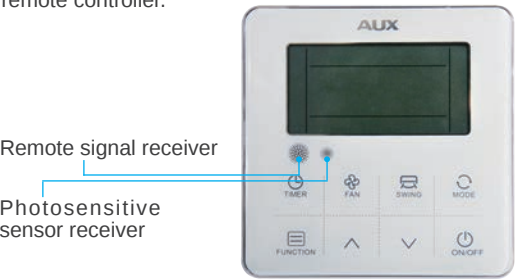

Addresses Setting

The address setting function is coupled with easy installation and simple future maintenance. Service personnel can set the address for the indoor unit using XK-05A.




Follow Me

With the follow me function, the indoor unit responds to the temperature measured by the temperature sensor built-in the wired controller, rather temperature sensor in the indoor unit itself, so the temperature is measured closer to the user, rather than at the ceiling or floor height.




Built-in Timer

The built-in daily timer allows the systems automatically start and stop according to user-defined time setting.

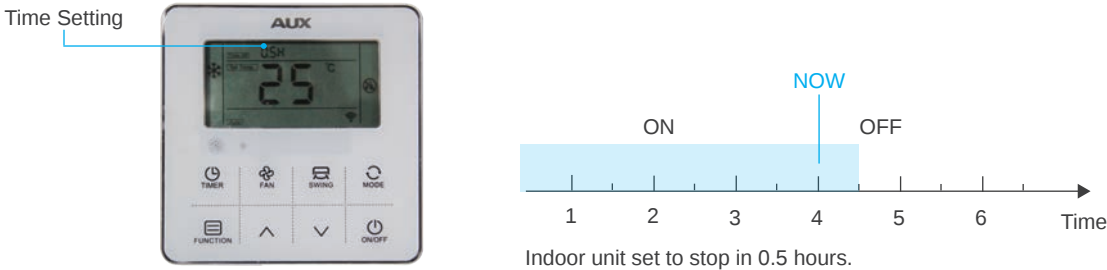


User-Friendly & Elegant Design

The XK-05A is a hidden-mode controller specially designed for hotels, hospitals, schools, offices. Fitted with a background light as standard, easy to use in the dark night.

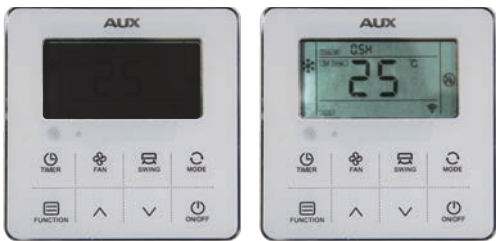


Error Reporting

If there is a malfunction, error codes are displayed in the temperature setting area of the controller's display screen.

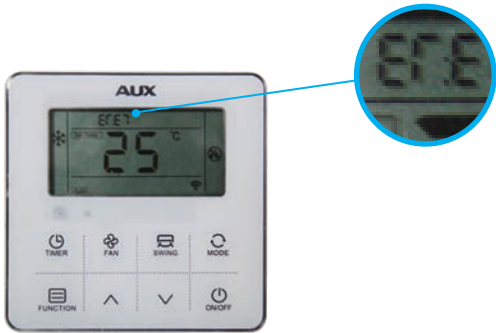

Keyboard Locking

The locking function could prevent other people changing the setting state at will in public places.

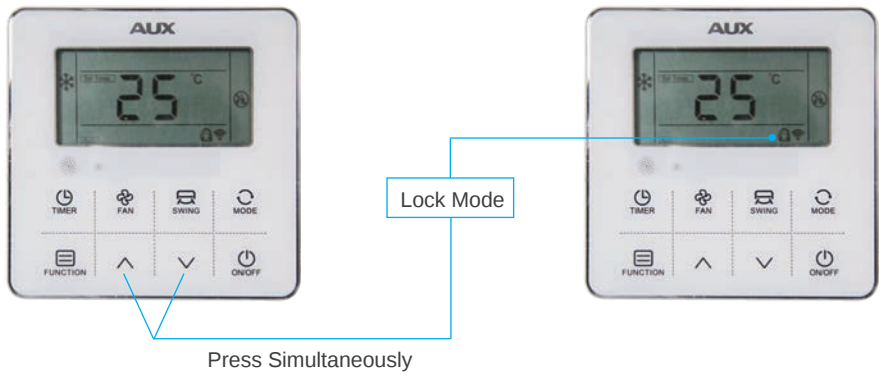

Features

Specifications

Model	XK-05A 
Dimesion (WxHxD) (mm)	120×120×18
Power Supply(V)	DC 12V by IDU




XK-06A

New Features

Weekly timer function

Easy setting of weekly running status

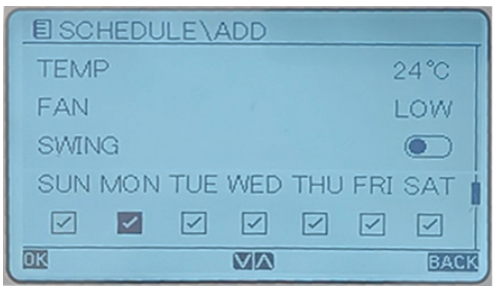


Display room temp (Optional)

Accurately display room temperature



Parameter Setting

Simple and convenient setting of parameter

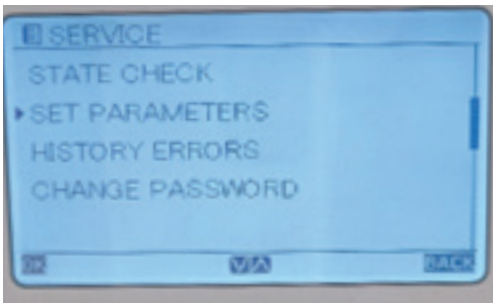

History errors

Simple and quick search of history errors



Features

Specifications

Model	XK-06A 
Dimesion (WxHxD) (mm)	120×120×20
Power Supply(V)	DC 12V by IDU

Centralized Controllers

Touch Screen Centralized Control

AUX touch screen centralized controller is a multifunctional device that can control up to 256 indoor units within a maximum connection length of 1200meters.Users could enjoy the flexibility of either controlling multiple units as a group or controlling each unit individually.



Multi-system Control

256 indoor units with no repeated address from different outdoor systems could be centralized controlled together. this greatly reduces system limitations.



Multiple Lock function

The new centralized controller could not only lock their own keyboards, it could also enable the users lock each unit's setting mode or remote controller.



Weekly Schedule Control

The CC-02 centralized controller's weekly schedule timer function allows users to set up to four scheduled periods per day ,each with its own operation mode and temperature setting.




Indoor Units Operation Status Display

Error and protection codes are shown directly on centralized controller's displays, no need to access outdoor unit's PCBs to obtain codes .The building management professionals could inquire a wide range of historical error and protection codes to get the system status information before contacting a service engineer.



Central controller & connection

The centralized controllers could be connected directly to the master outdoor unit or any indoor unit of each system .so it significantly simply wiring configuration.


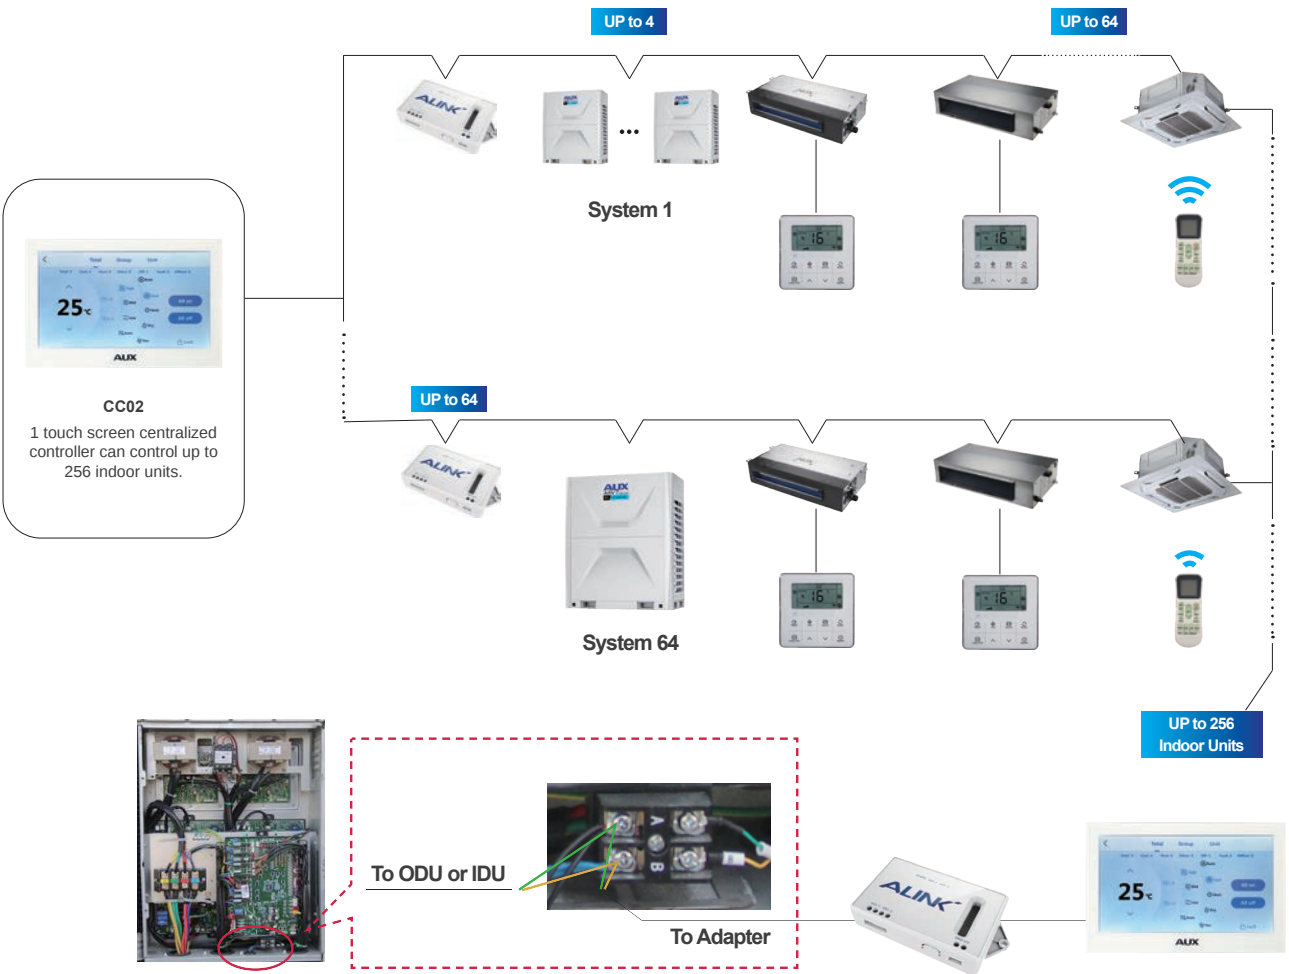


Main Components of Centralized Controller

	CC-02	CM-MTD/AM01
Model		
Dimension(W×H×D) (mm)	176x116x12 (Outside the wall) 120x60x25 (Inside the wall)	127 ×65.8×20.8mm
Power supply	AC 180-240V (50/60Hz)	DC 12V

Central controller & connection (Optional)


Meet different air solution for kinds of application sites

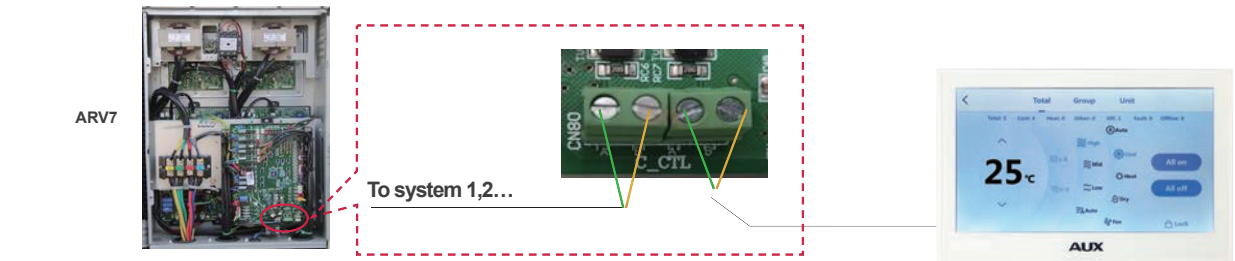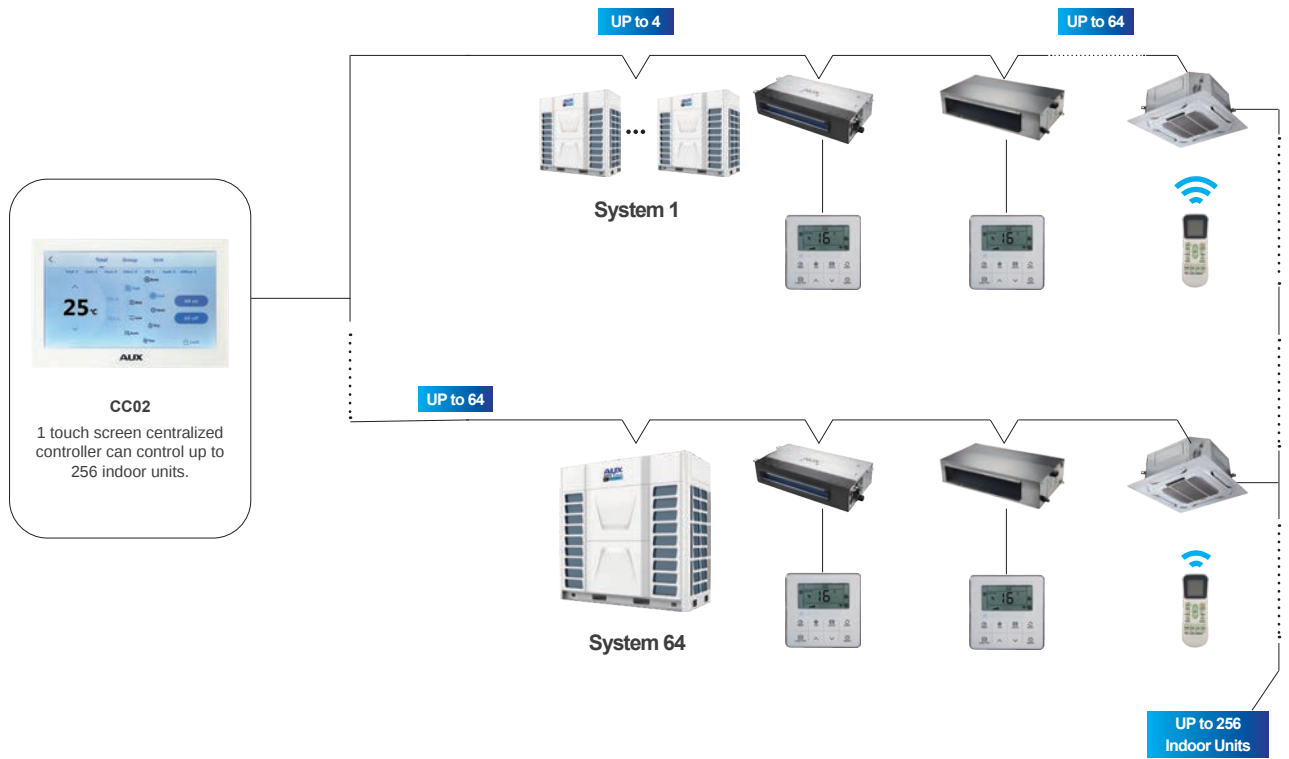

Notes:
It needs to set C9 and C10 parameters. For details, please contact AUX technical engineers

Centralized Control Software

System Overview

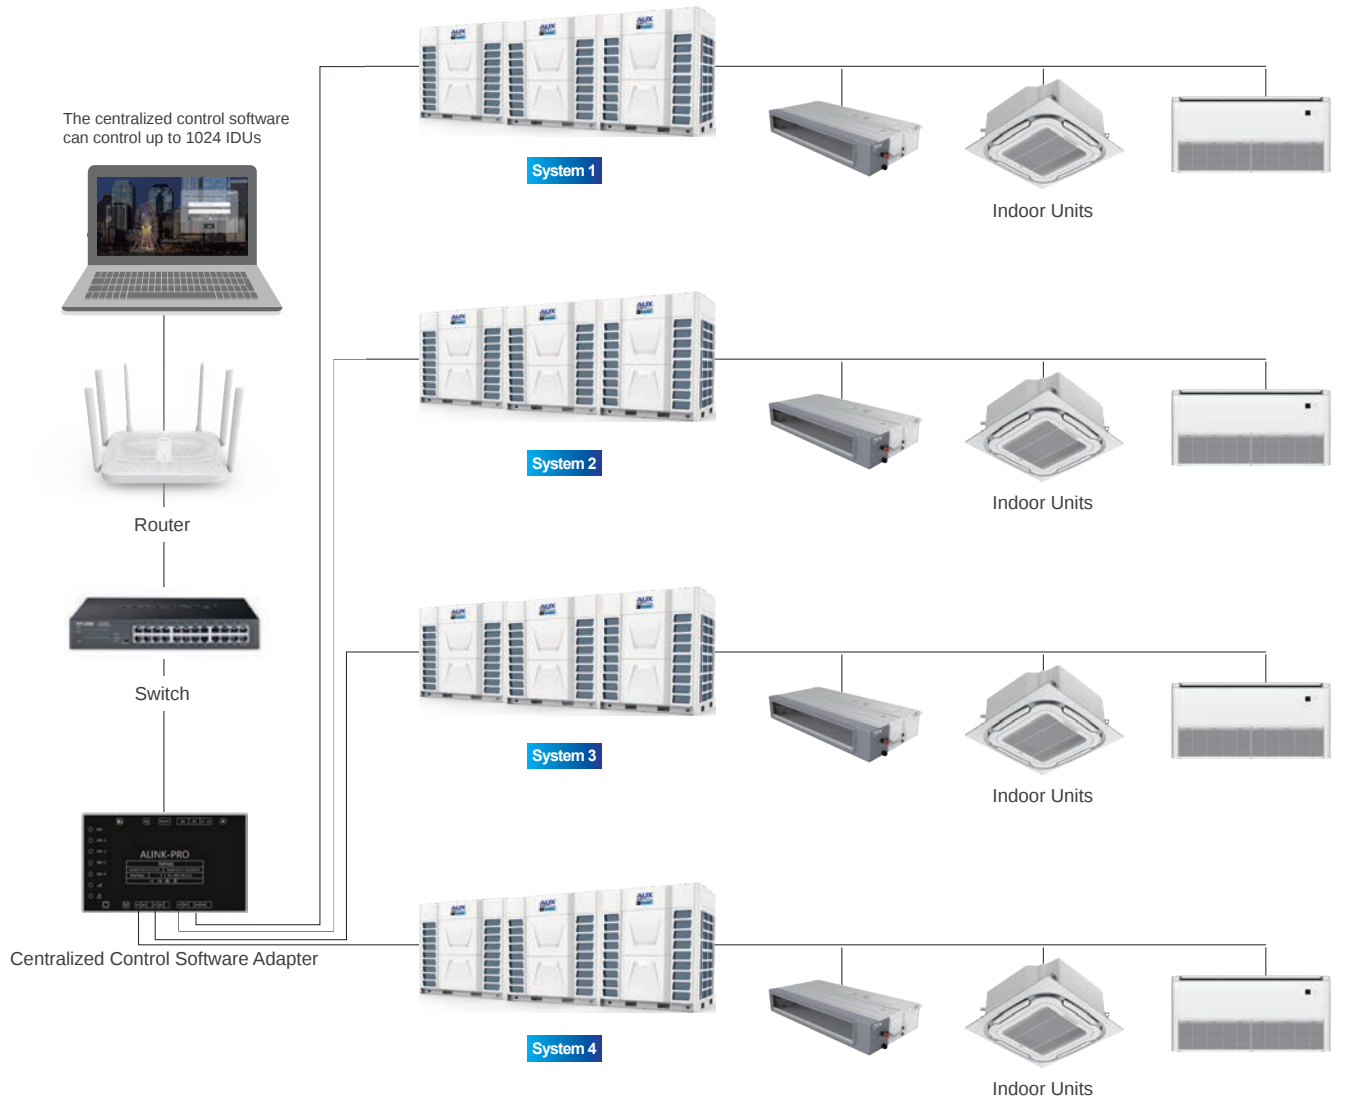

System Overview


Users do not need to go to the harsh environment of the site, they can monitor the function of units just through computer. This greatly improves convenience of daily management and the efficiency of central air conditioners;
Timely find the fault and save the maintenance cost of air conditioner units, minimize losses ;
Timer function with multi-period week, fully automated schedule planning of unit;

Main Components Of Centralized Control System

No	Main Components	Requirement & Function
1	Adapter/Gateway 	1. Model: CM-PTD/A02 2. Power: DC 9~24V,400mA 3. Communication:RS485 4. LAN (DHCP to obtain IP automatically) 4. Baud rate: 9600, 5. "even parity" by number of systems 6. Working condition: -25℃ ~55℃ , 45%~75% 7.Dimension:178mm×115mm×85mm
2	Centralized control software 	AUX intelligent management system


Notes:
Routers, switches and other equipments are purchased locally by the user

Software Introduction Main Interface

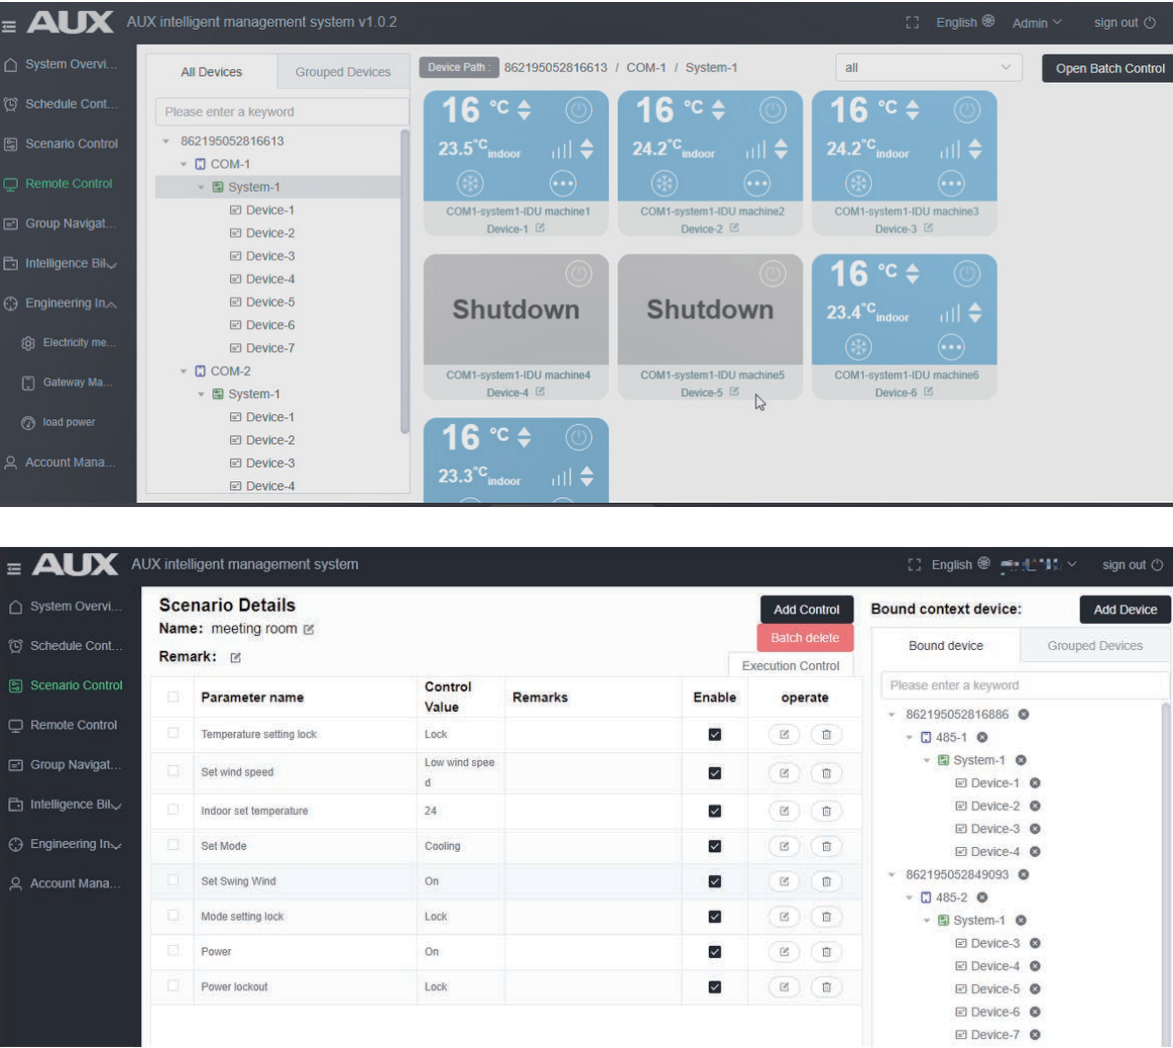

Tenant billing solution

System Overview

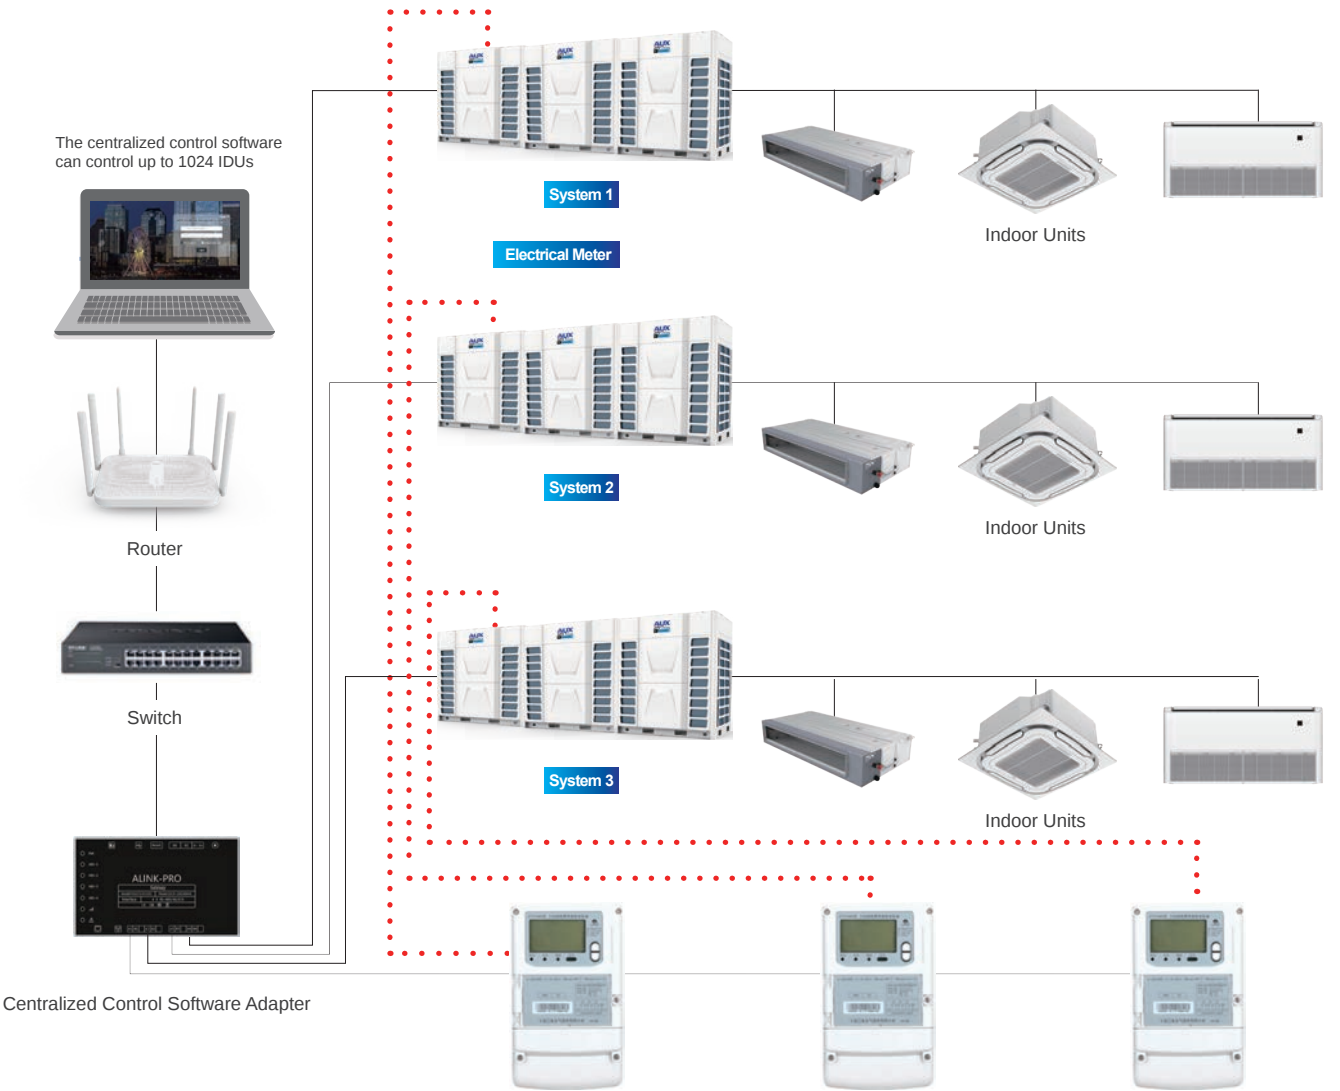

System Overview

A function that proportionally distributes the total power used by the air conditioners in a rental building, measured by using an electricity meter among the tenants. This function is very suitable for ARV System.



Main Components Of Centralized Control System

No	Main Components	Requirement & Function
1	Adapter/Gateway 	1. Model: CM-PTD/A02 2. Power: DC 9~24V,400mA 3. Communication:RS485 4. LAN (DHCP to obtain IP automatically) 5. Baud rate:9600, 6. "even parity" by number of systems 7. Working condition: -25℃ ~55℃ , 45%~75% 7.Dimension:178mm×115mm×85mm
2	Electrical Meter 	1. Model: DTZY188 2. Voltage: 380V~3ph , 3. Max current : 100A 4. Communication type:RS485 5. Protocol:DL/T 645-2007; 6. Baud rate:9600, parity type : "even parity" 7. Operation: Temp(-25~55℃),humid(45~75%) 8. Dimention: 290×170×85mm
3	Centralized control software 	AUX intelligent management system

Notes:

Routers, switches and other equipments are purchased locally by the user


Software Introduction Main Interface

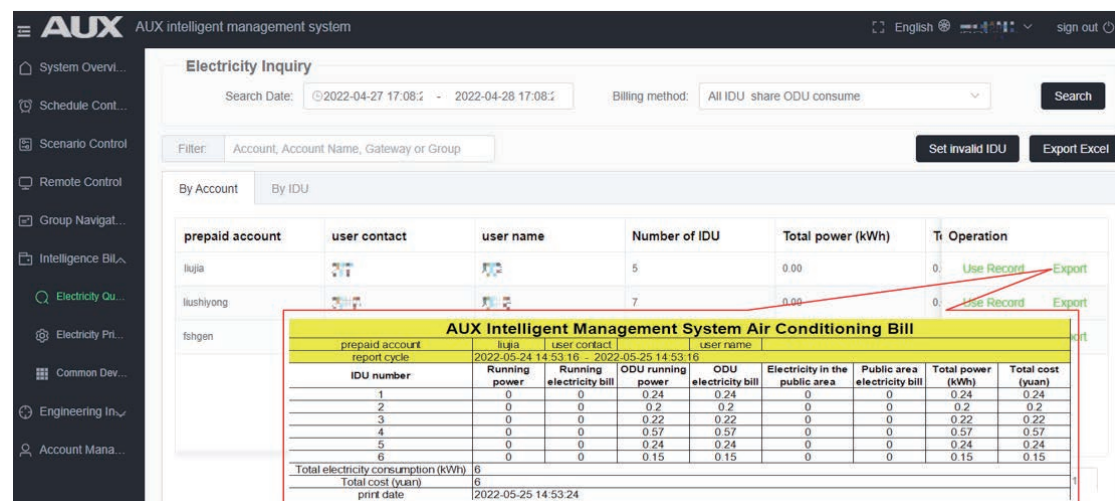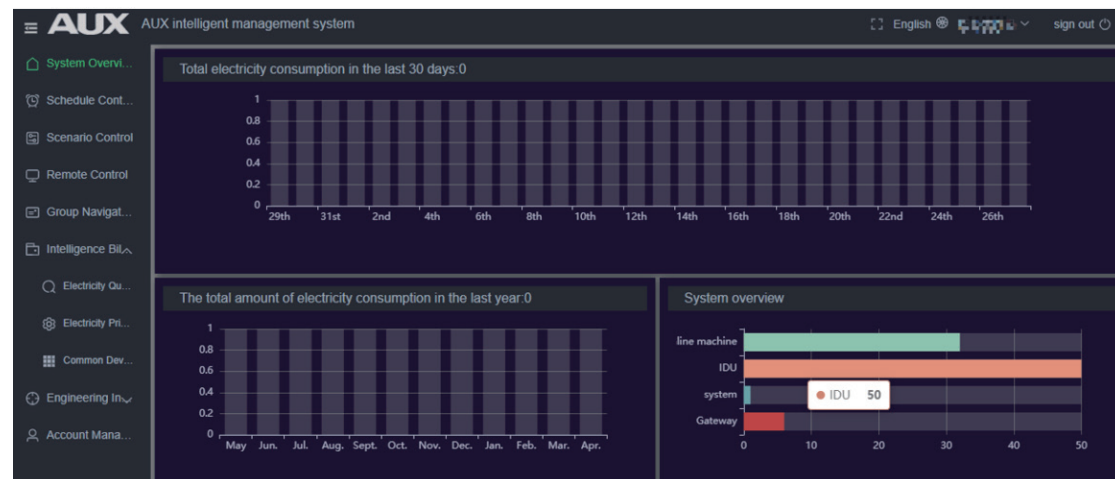

BMS System

Overall Structure


MODBUS

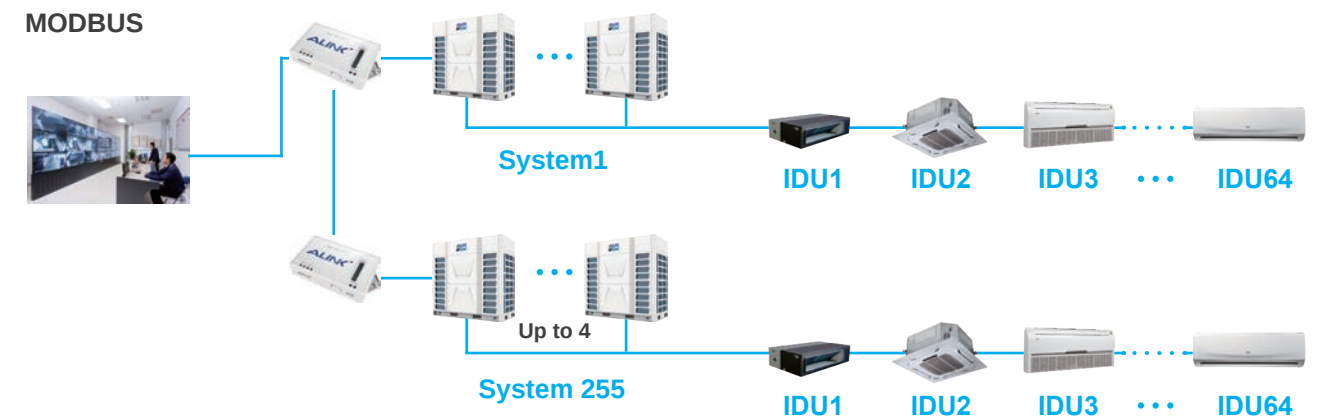

Notes:

The master outdoor unit can also directly connect to MODBUS without mini gateway.
For details, please contact AUX technical engineers


BACnet

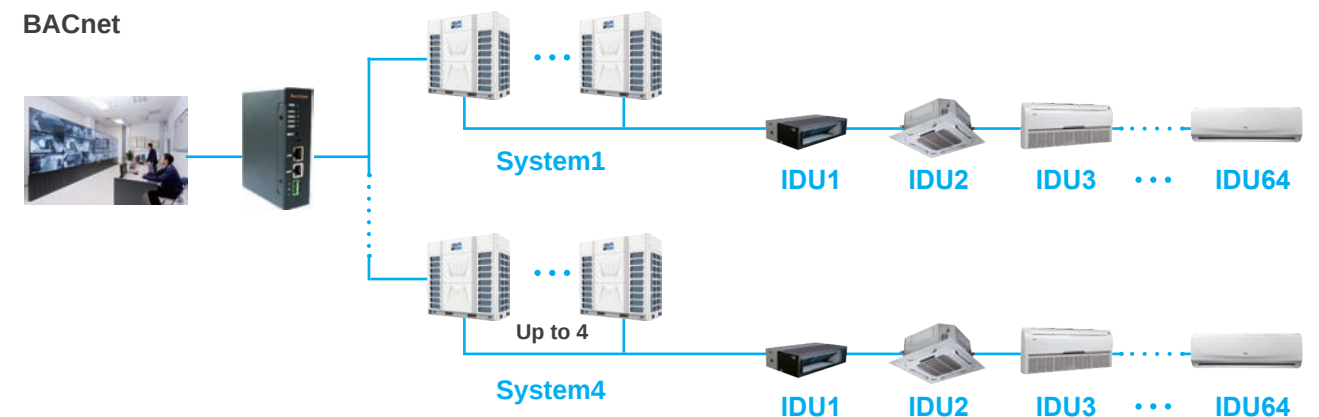

Model	CM-MTD/AM01	Bacnet gateway
		
Dimension(W×H×D)mm	127 ×65.8×20.8	115×35×135
Power supply	DC 12V	DC 24V,7W
Feature	Max.255	Unlimited(HUB)

Wireless Network Control


Schematic Diagram

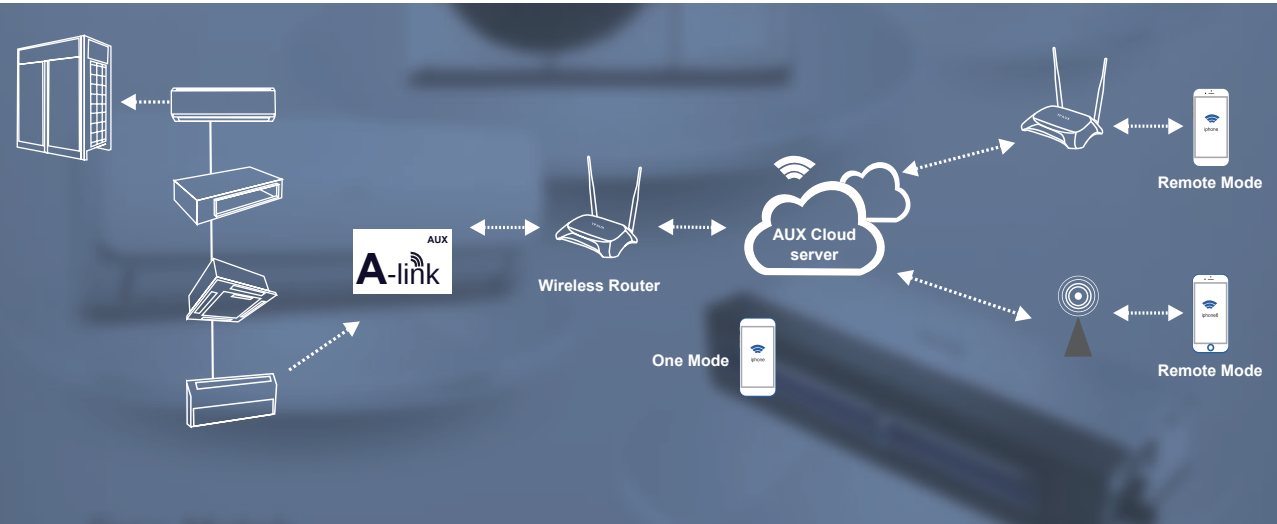

Features

- 1. AUX air conditioner can connect to intelligent terminal through WIFI or GPRS network,customers can enjoy fun and convenience of remote control the AC via iphone, ipad and other mobile terminals(Android and IOS) at anytime and anywhere.
- 2. The function of software on Mobile terminal includes mode control,temperature control, swing control, timing control.
- 3. Customers can set schedule to plan their day, also the scene mode can be set conveniently.


Accessories-AHU Kit

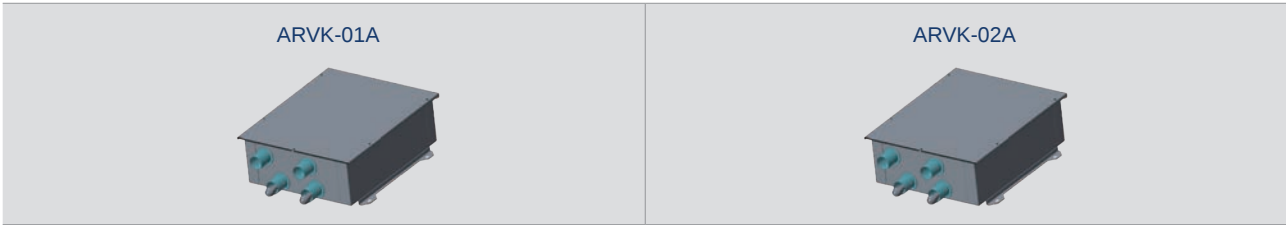


Model	Net Dimension (W×D×H)mm	Packing Dimension (W×D×H)mm	Net Weight (kg)	Gross Weight (kg)	AHU capacity(kw)	DX coil volume (min-max)dm³	Reference air volume(m³/h)	Power supply
ARVK-01A	573×447×180	655×525×250	11.5	14.5	11.2-14	2.1-2.6	2000	220-240V,50,1
					14-18	2.6-3.3	2300	
					18-20	3.3-3.7	2700	
					20-25	3.7-4.6	3000	
					25-30	4.6-5.5	3800	
ARVK-02A	573×447×180	655×525×250	12	15	30-36	5.5-6.6	4500	
					36-40	6.6-7.4	5500	
					40-45	7.4-8.3	6000	
					45-50	8.3-9.2	7000	
					50-56	9.2-10.3	8000	

Remarks: applicable to MINI VRF (capacity ≥ 12KW)

Single AHU connection

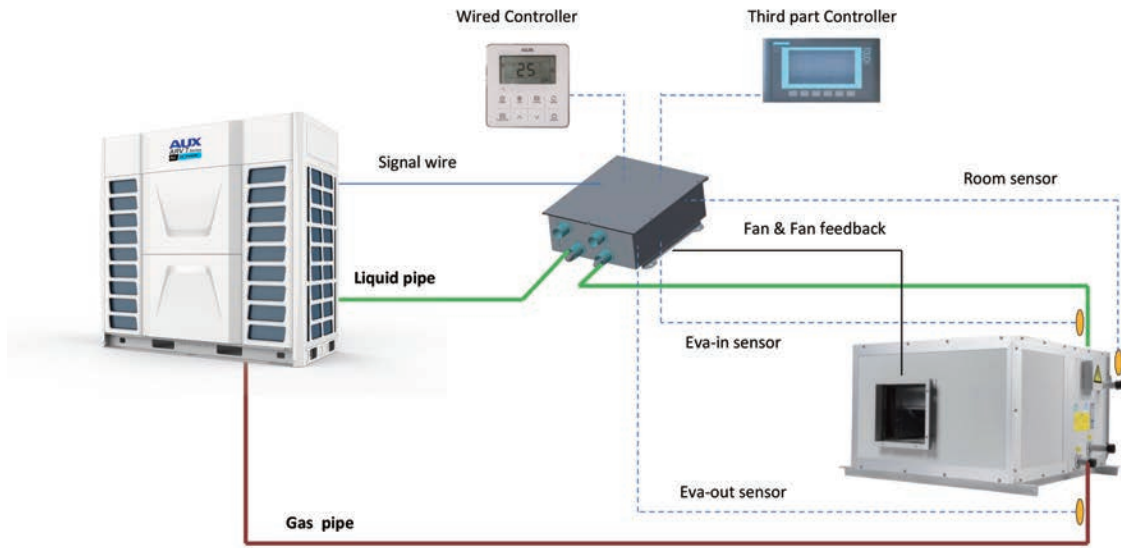

Above diagram suitable for factory default control, 0-10V(temperature control), 0-10V(pressure control)

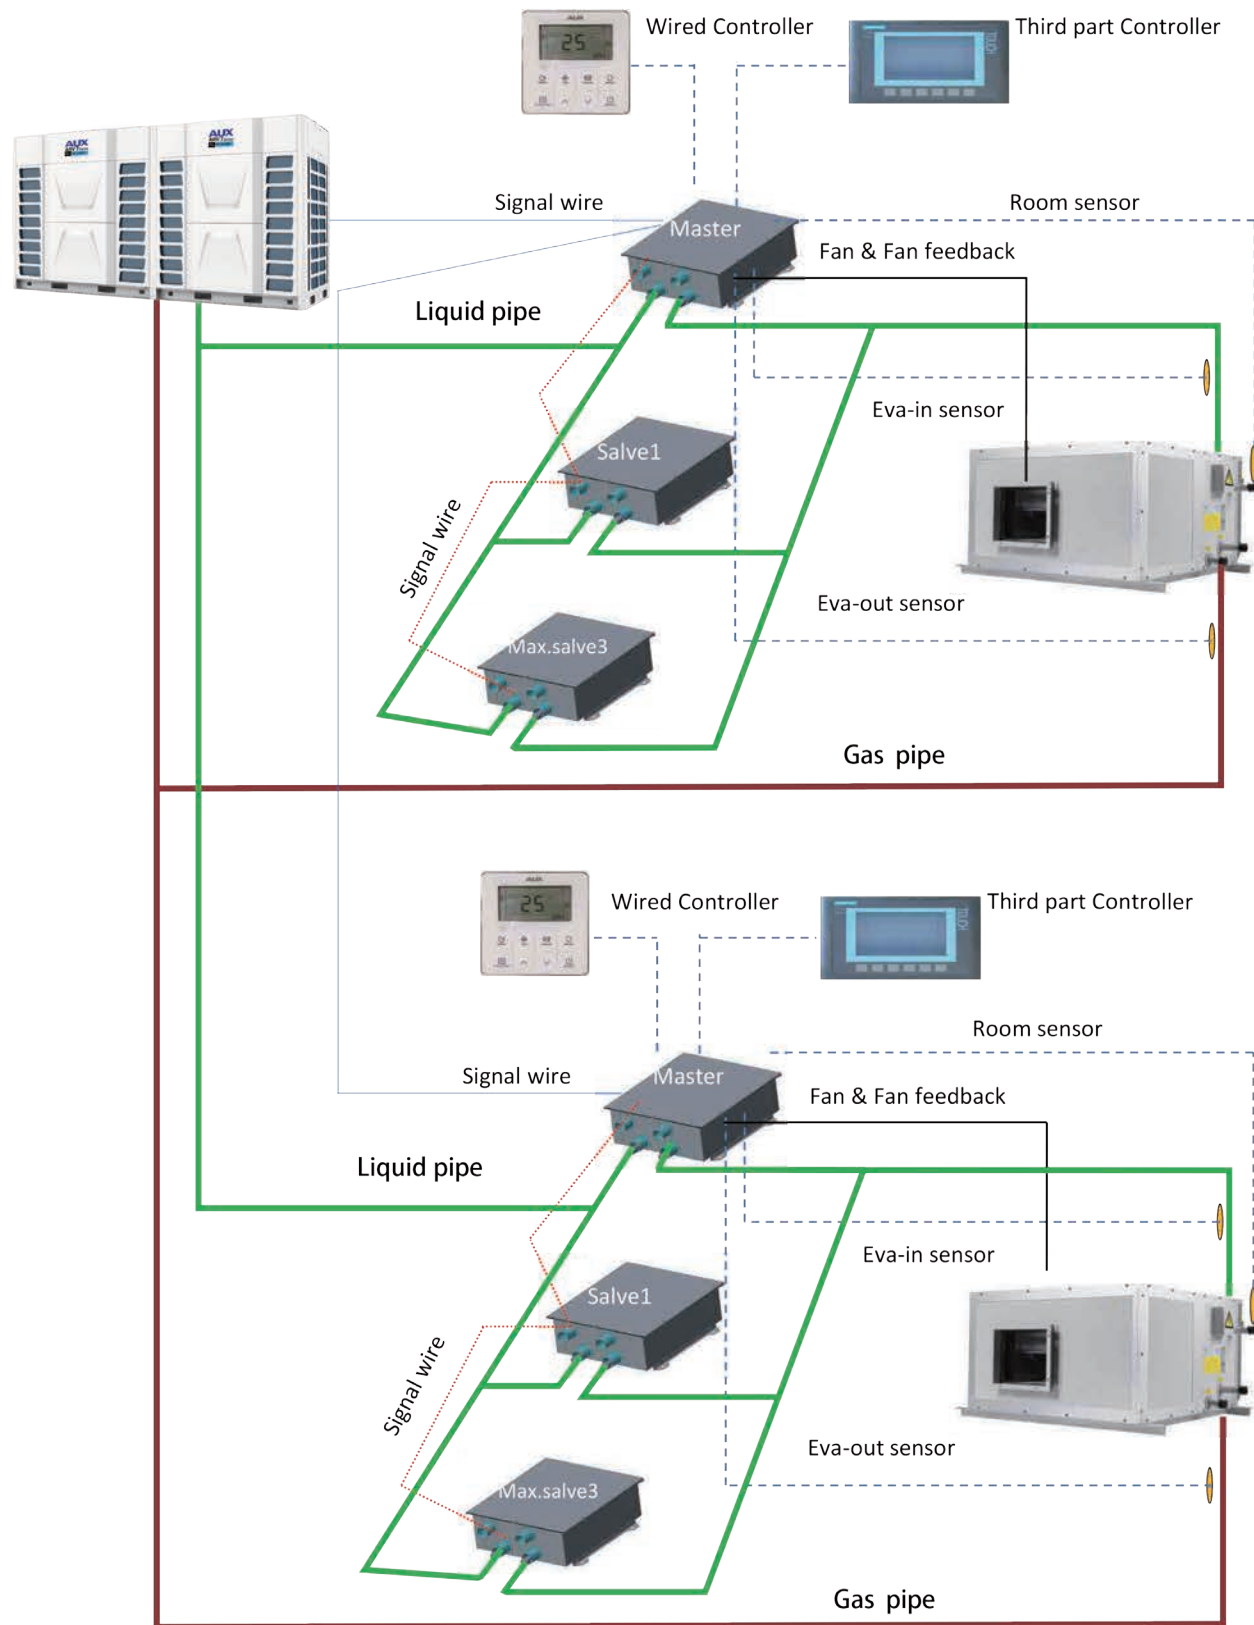


Above diagram suitable for factory default control, 0-10V(temperature control)

Accessories-Selection Software



To meet the customers' requirements, AUX has developed the advanced selection software. The software provides quick and convenient selectable options for users, supports multiple languages, greatly improves the selection and installation process.

6 Parts Of The ARV Selection

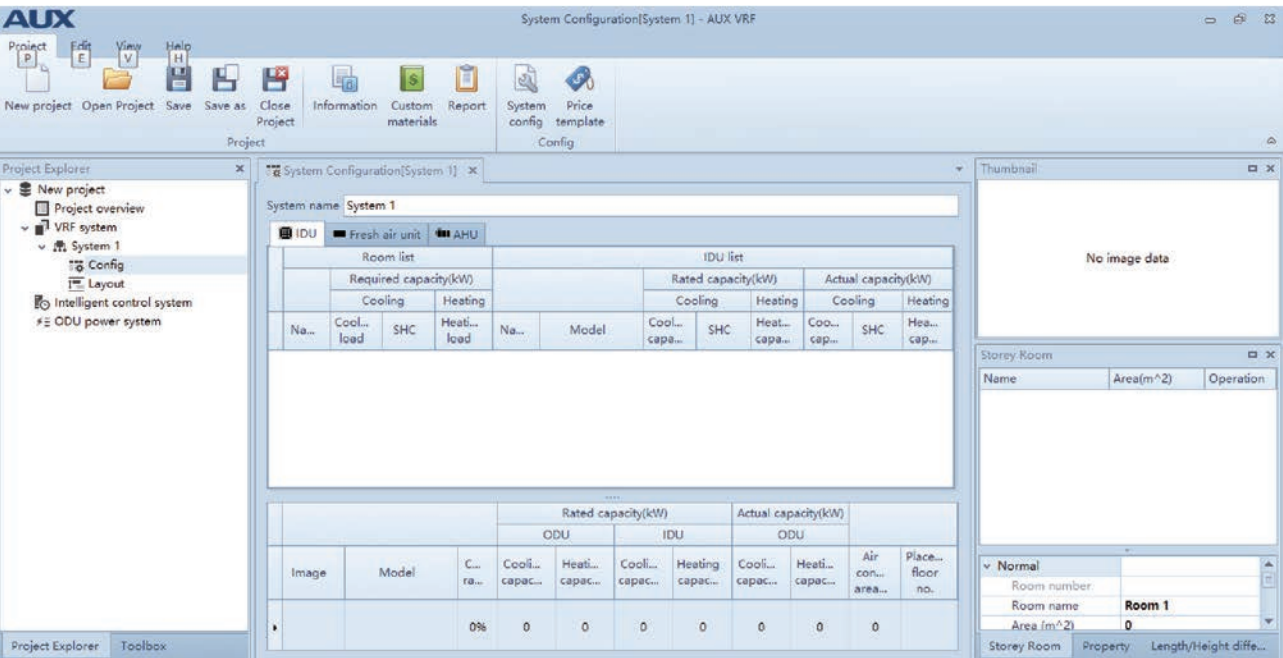

Revit Models Series


AUX revit is developed to make 3D design (shows Electrical Connector+Pipe Connectors +Produce parameter) of AUX products easier than the previous program. It enables engineers to check 3D images from design stage and prevents possible issues of the installation stage.

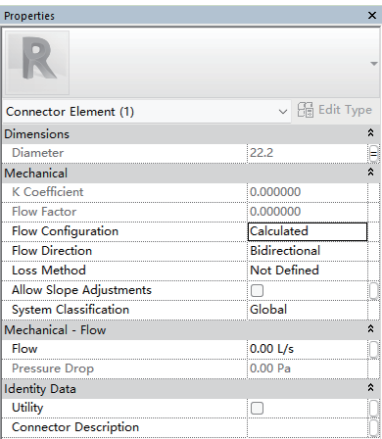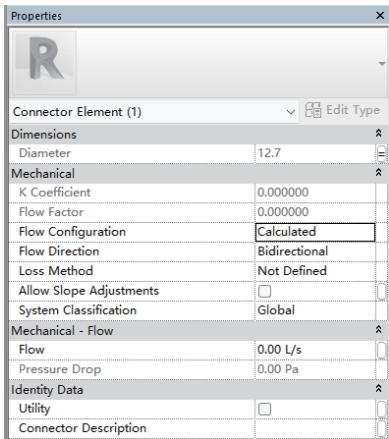


Accessories-Monitoring Software

Self-diagnosis software can be used as remote controller, it is recommended for commissioning. It can monitor the running state of the outdoor and indoor units real time. And display the malfunctions, be convenient to do the commissioning and trouble-shooting work.

Monitoring Software

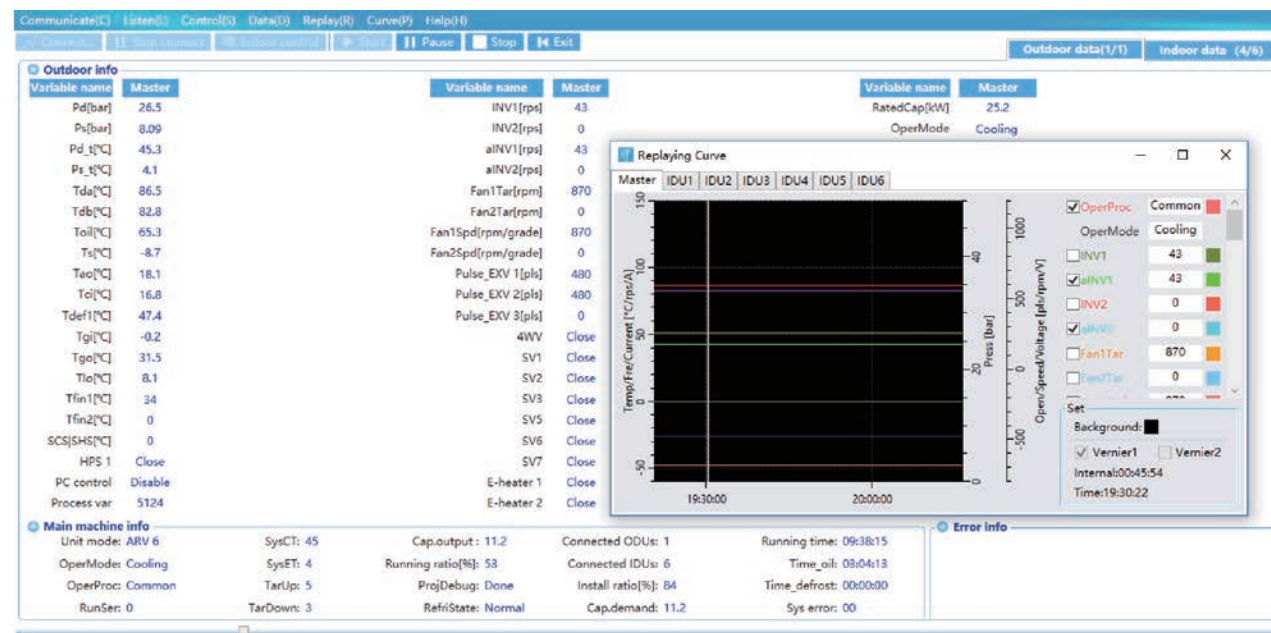


Installation Diagram

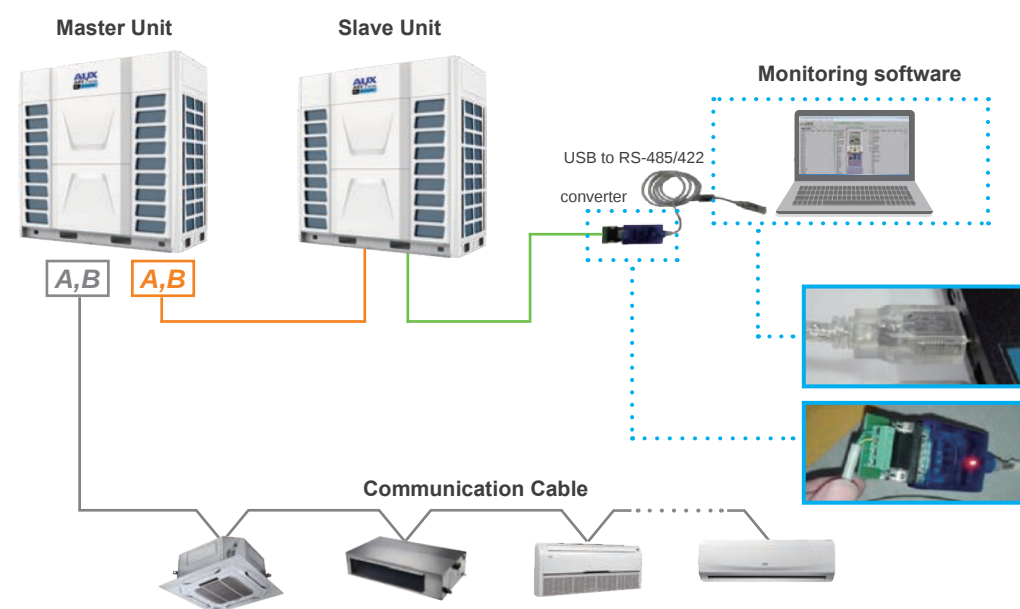

HRV-Heat Recovery Ventilator


Nomenclature

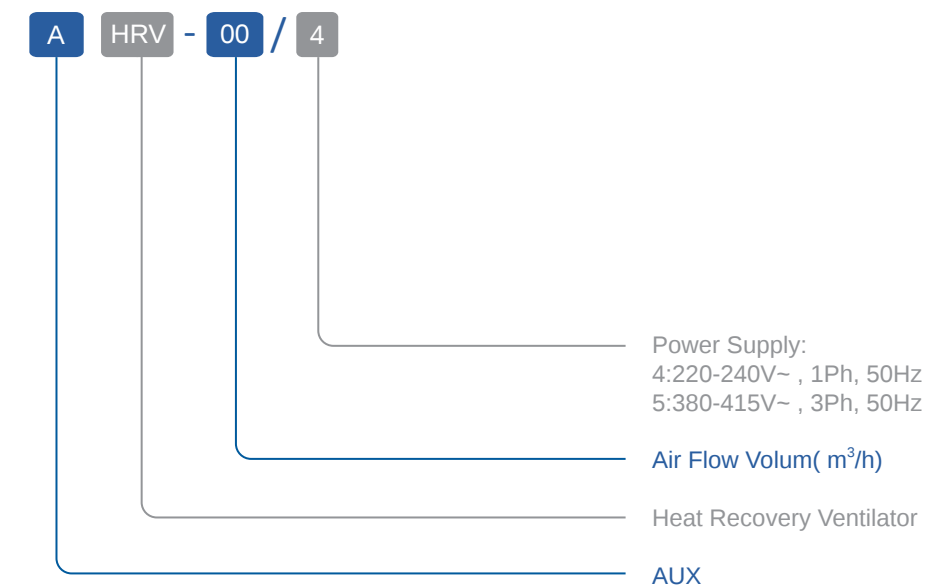

HRV-Heat Recovery Ventilator

Adopt Centrifugal Fan With Lower Power Consumption And Longer Air Supply Distance; Easy Control, Friendly Operation.

All units are equipped with 3-speed fan mode, adjusting the air flow rate in accordance with the ceiling height. Innovative centrifugal fan provides larger air volume but lower noise, making the air supply more quietly and smoothly.

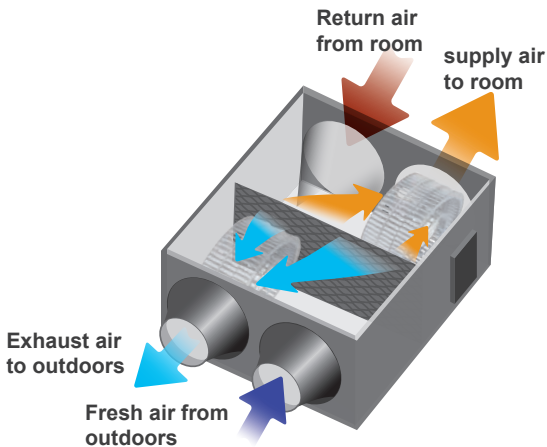

Different Modes For Your Choice

- Exhausting mode (Hi/Mid/Low fan speed can be chosen)
- Air supply mode (Hi/Mid/Low fan speed can be chosen)
- By pass mode (Hi/Mid/Low fan speed can be chosen)


In this mode, there is no heat exchanging happened, which is more energy saving. For example:

If outdoor temperature is lower than indoor, we don't need heat exchanging, but we need fresh air. We can choose by pass mode. Remark: this mode is only available for HRV-200~1000.


- Heat exchanging mode (Hi/Mid/Low fan speed can be chosen)
- In this mode, supply air flow=exhaust air flow.

Auto mode

In this mode, the unit will run at heat exchange mode or by pass mode judged by outdoor temperature and indoor temperature with low speed air flow.

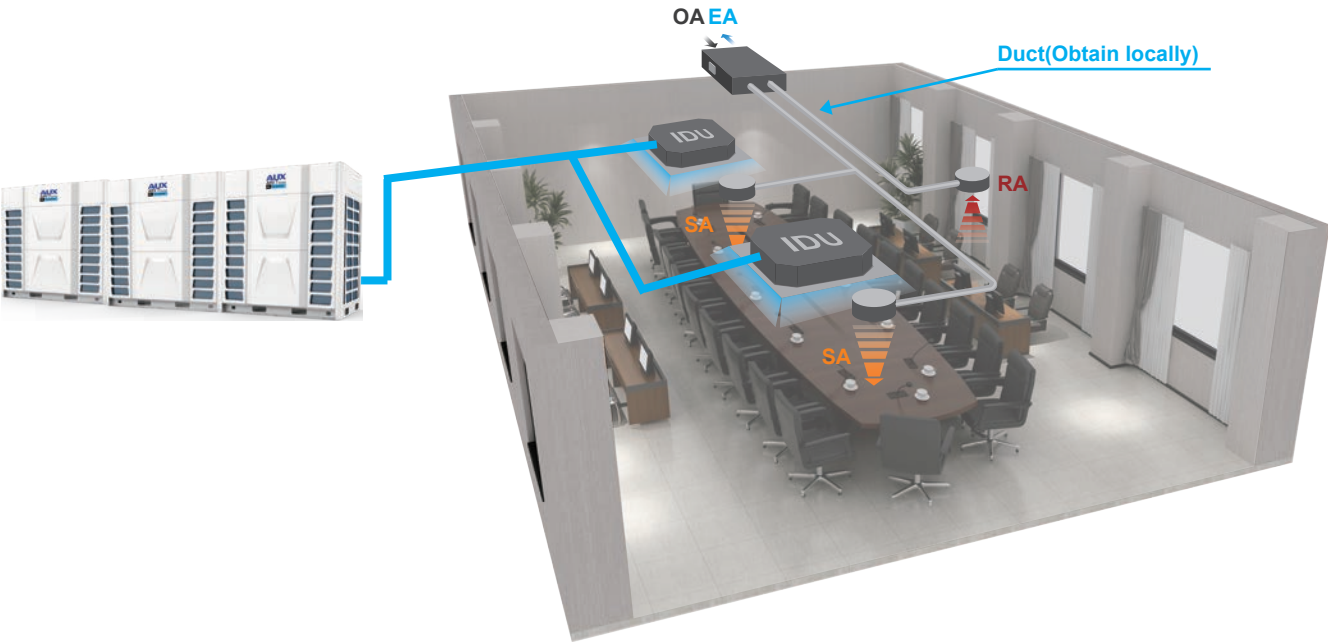

HRV
















Specification-HRV

Model			AHRV-200/4	AHRV-300/4	AHRV-400/4	AHRV-500/4	AHRV-600/4	AHRV-800/4	AHRV-1000/4
Volume	m3/h		200	300	400	500	600	800	1000
	CFM		118	176	235	294	353	471	588
External static pressure			Pa	75	75	80	80	90	100
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1	220~240,50,1
	Power Input	W	65	120	200	220	242	410	510
Cooling	Temp. Efficiency	%	60	60	60	60	60	60	60
	Enthalpy Efficiency	%	50	50	50	50	50	50	50
Heating	Temp. Efficiency	%	65	65	65	65	65	65	65
	Enthalpy Efficiency	%	55	55	55	55	55	55	55
Noise Level			dB(A)	37	39	40	41	41	43
Flange			mm	¢ 144	¢ 144	¢ 144	¢ 194	¢ 194	¢ 243
Net Weight			kg	25	27	30	41	41	68
Net Dimension(WxDxH)			mm	848×654×264	926×722×270	926×927×270	1018×1024×270	1018×1024×270	1274×1007×388
Gross Dimension(WxDxH)			mm	910×710×405	985×775×405	985×980×405	1085×1080×405	1085×1080×405	1335×1055×533

Specification-HRV

Model			AHRV-1500/5	AHRV-2000/5	AHRV-2500/5	AHRV-3000/5	AHRV-4000/5	AHRV-5000/5
Volume	m3/h		1500	2000	2500	3000	4000	5000
	CFM		882	1176	1471	1765	2353	2941
External static pressure			Pa	160	170	180	200	240
Electric Data	Power Supply	V~,Hz,Ph	220~240,50,1	220~240,50,1	380~415,50,3	380~415,50,3	380~415,50,3	380~415,50,3
	Power Input	W	1000	1200	2000	2100	2400	3000
Cooling	Temp. Efficiency	%	60	60	60	60	60	60
	Enthalpy Efficiency	%	50	50	50	50	50	50
Heating	Temp. Efficiency	%	65	65	65	65	65	65
	Enthalpy Efficiency	%	55	55	55	55	55	55
Noise Level			dB(A)	52	60	62	64	66
Flange			mm	320x300	320x300	320x300	320x300	323x253
Net Weight			kg	200	225	240	270	265
Net Dimension(WxDxH)			mm	1600×1270×540	1650×1470×540	1710×1400×600	1700×1630×640	1725×1450×1050
Gross Dimension(WxDxH)			mm	1668×1331×720	1770×1550×665	1770×1550×665	1760×1750×770	1785×1510×1180

Branch Pipe

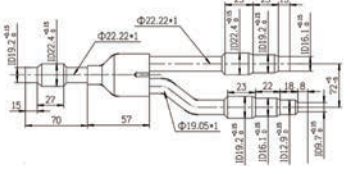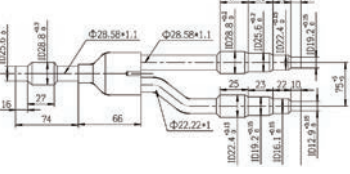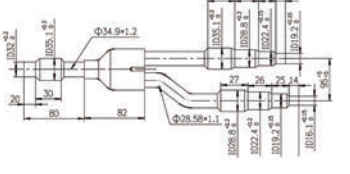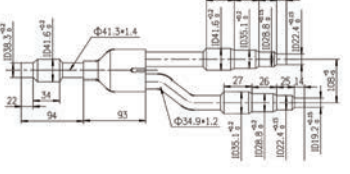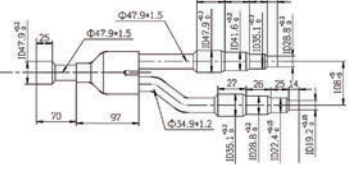Model	Appearance	Dimension	
		Gas side joints	Liquid side joints
AFG-00B			
AFG-12B			
AFG-24B			
AFG-34B			
AFG-50B			
AFG-64B			

Model	Packing Dimension(mm)	Net Weight/Gross Weight(kg)
AFG-00B	300x95x40	0.31/0.35
AFG-12B	330x100x40	0.44/0.49
AFG-24B	370x115x45	0.71/0.77
AFG-34B	440x140x50	1.11/1.20
AFG-50B	480x160x65	1.65/1.76
AFG-64B	480x160x65	1.88/1.98

A*: The total capacity of indoor units which is connected to this branch joint

Project Reference



CTTI Building

Country:	Pakistan
City:	Islamabad
Capacity	1648KW
Equipment:	DC Inverter VRF(ARV6)
Date:	08-2018



Izumi Office building

Country:	Burma
City:	Yangon
Capacity	150KW
Equipment:	DC Inverter VRF(ARV6)
Date:	03-2019



Solar rays building

Country:	Burma
City:	Yangon
Capacity	210KW
Equipment:	DC Inverter VRF(ARV6)
Date:	08-2018



EXPO 2021

Country:	UAE
City:	Dubai
Capacity	1176KW
Equipment:	DC Inverter VRF(MINI ARV)
Date:	09-2019

Project Reference




Shopping Mall

Country: Uzbekistan
City: Tashkent
Capacity: 500KW
Equipment: DC Inverter VRF(ARV6)
Date: 10-2020



GEM MALL

Country: Mongolia
City: Ulan Bator
Capacity: 650KW
Equipment: ARV Individual
Date: 06-2018

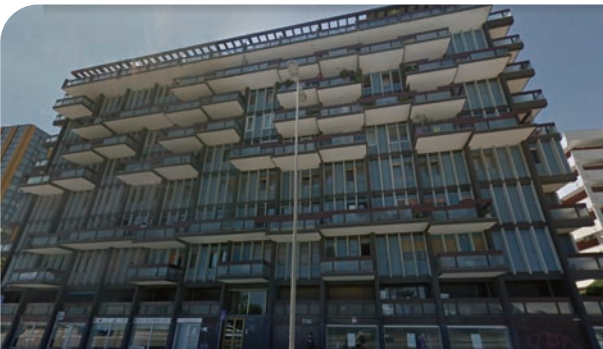

ACTOR STUDIO

Country: Italy
City: Barry
Capacity: 585KW
Equipment: DC Inverter VRF(ARV6)
Date: 01-2019



National Energy Administration

Country: Uzbekistan
City: Tashkent
Capacity: 400KW
Equipment: DC Inverter VRF(ARV6)
Date: 10-2020

Project Reference



Unicaf University

Country: Cyprus
City: Larnaca
Capacity: 540KW
Equipment: DC Inverter VRF(ARV6)
Date: 09-2020



Distribution Centre

Country: Russia
City: Vladivostok
Capacity: 1730KW
Equipment: ARV6
Date: 2022



Hotel

Country: Russia
City: St.Petersburg
Capacity: 1055KW
Equipment: ARV6
Date: 2022