



Tapón Cap BPE, extremo Soldable AWF

Table DT-4.1.5-1 Automatic Tube Weld: Cap

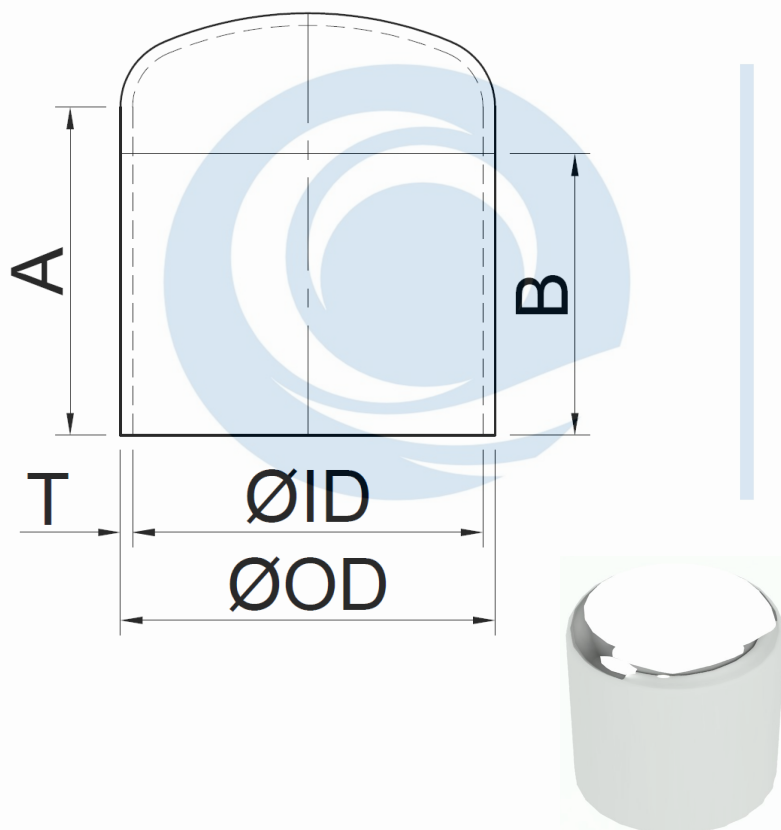


Table DT-4.1.5-1 Automatic Tube Weld: Cap					
SIZE	ØOD	ØID	A	T	# Part. Ac. Inox. 316L
1/2"	0.500" 12.7 mm	0.370" 9.4 mm	1.500" 38.1 mm	0.065" 1.65 mm	JB 16W 316L 15
3/4"	0.750" 19.05 mm	0.620" 15.75 mm	1.500" 38.1 mm	0.065" 1.65 mm	JB 16W 316L 20
1"	1.000" 25.4 mm	0.870" 22.1 mm	1.500" 38.1 mm	0.065" 1.65 mm	JB 16W 316L 25
1-1/2"	1.500" 38.1 mm	1.370" 34.8 mm	1.500" 38.1 mm	0.065" 1.65 mm	JB 16W 316L 40
2"	2.000" 50.8 mm	1.870" 47.5 mm	1.500" 38.1 mm	0.065" 1.65 mm	JB 16W 316L 50
2-1/2"	2.500" 63.5 mm	2.370" 60.2 mm	1.500" 38.1 mm	0.065" 1.65 mm	JB 16W 316L 65
3"	3.000" 76.2 mm	2.870" 72.9 mm	1.750" 44.45 mm	0.065" 1.65 mm	JB 16W 316L 80
4"	4.000" 101.6 mm	3.834" 97.38 mm	2.000" 50.8 mm	0.083" 2.11 mm	JB 16W 316L 100
6"	6.000" 152.4 mm	5.782" 146.86mm	2.500" 63.50 mm	0.109" 2.77 mm	JB 16W 316L 150

General note: Minimum I.D. control portion length, B, is 0.375 in. (9.53 mm) for all sizes.

