



Codo BPE de 45°, extremos Soldable AWF x Férula clamp

Table DT-4.1.1-5 Automatic Tube Weld: Hygienic Clamp
Joint, 45-deg Elbow

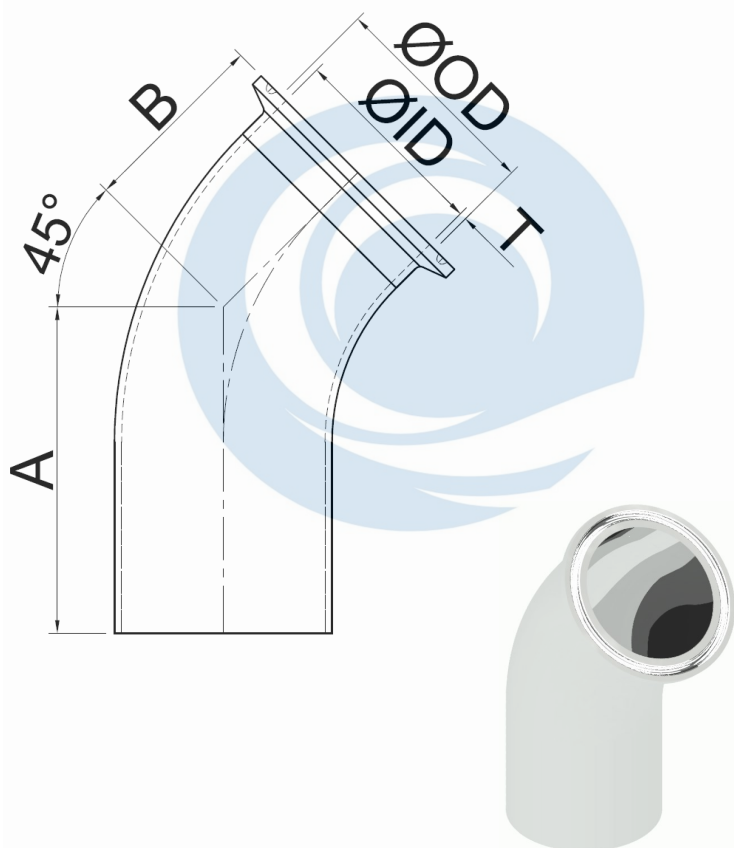


Table DT-4.1.1-5 Automatic Tube Weld: Hygienic Clamp
Joint, 45-deg Elbow

SIZE	ØOD	ØID	A	B	T	# Part. Ac. Inox. 316L
1/2"	0.500" 12.7 mm	0.370" 9.4 mm	2.250" 57.15 mm	1.000" 25.4 mm	0.065" 1.65 mm	JB L2KM 316L 15
3/4"	0.750" 19.05 mm	0.620" 15.75 mm	2.250" 57.15 mm	1.000" 25.4 mm	0.065" 1.65 mm	JB L2KM 316L 20
1"	1.000" 25.4 mm	0.870" 22.1 mm	2.250" 57.15 mm	1.125" 28.58 mm	0.065" 1.65 mm	JB L2KM 316L 25
1-1/2"	1.500" 38.1 mm	1.370" 34.8 mm	2.500" 63.50 mm	1.438" 36.53 mm	0.065" 1.65 mm	JB L2KM 316L 40
2"	2.000" 50.8 mm	1.870" 47.5 mm	3.000" 76.20 mm	1.750" 44.45 mm	0.065" 1.65 mm	JB L2KM 316L 50
2-1/2"	2.500" 63.5 mm	2.370" 60.2 mm	3.375" 85.73 mm	2.063" 52.40 mm	0.065" 1.65 mm	JB L2KM 316L 65
3"	3.000" 76.2 mm	2.870" 72.9 mm	3.625" 92.08 mm	2.375" 60.33 mm	0.065" 1.65 mm	JB L2KM 316L 80
4"	4.000" 101.6 mm	3.834" 97.38 mm	4.500" 114.30 mm	3.125" 79.38 mm	0.083" 2.11 mm	JB L2KM 316L 100
6"	6.000" 152.4 mm	5.782" 146.86 mm	6.250" 158.75 mm	5.250" 133.35 mm	0.109" 2.77 mm	JB L2KM 316L 150

