

MODULESCI

314, Techno2-ro, Yuseong-gu, Daejeon, Republic of Korea

Customer Service : +82-42-935-6113

Business Registration No. : 257-87-00626

www.modulesci.com

MODULESCI

The logo for MODULESCI, featuring the word in a bold, sans-serif font. The letter 'O' is stylized with a red dot above it and a red ring around it, resembling a lens or a microscope component.

MODULESCI

Overview

[PV-100 Series Introduction](#)

[PE-100 Series Introduction](#)

[PE-300 Series Introduction](#)

[Sample Holder/BSE/EDS](#)

[Specifications & Installation Space](#)

ABOUT
MODULESCI

**Modular Instrumentation
for Nano Imaging**
Scanning Electron Microscope

ModuleSci was established in 2017, offering high-resolution electron microscopes based on field emission electron guns and objective lens technology developed with the cooperation of the Korea Research Institute of Standards and Science (KRISS). We offer both standard Tungsten Filament SEMs with a resolution of about 100,000x, and high-performance FE-SEM at a price point significantly lower than most of our competitors.


Building on our experience in both electron and light optics, we have also commercialized a correlative light and electron microscope allowing users to observe both electron and optical images simultaneously. This technique allows the user to utilize the unique properties of optical and fluorescent microscopy coupled with the nano-scale resolution of electron microscopy.

With a corporate culture focused on continuous product development and innovation, ModuleSci is quickly becoming a leader in the global nanotechnology market.




PV-100 Series


The PV-100 is our entry-level Tabletop SEM with a tungsten filament electron source, designed for laboratories where space is at a premium. But the small size doesn't mean you need to compromise on features. the PV-100 comes with a 5-axis stage, and the new GUI simplifies operation while allowing both novice and expert users to easily obtain high-quality images. With an effective magnification of 70,000x, the PV-100 is ideal for routine imaging at medium and low magnifications.

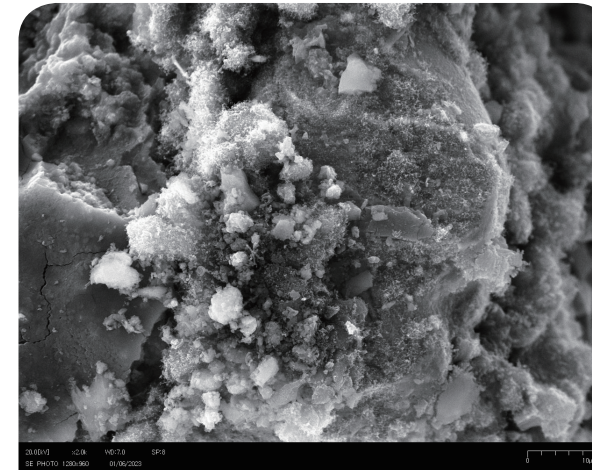


X2.0k Metal Form

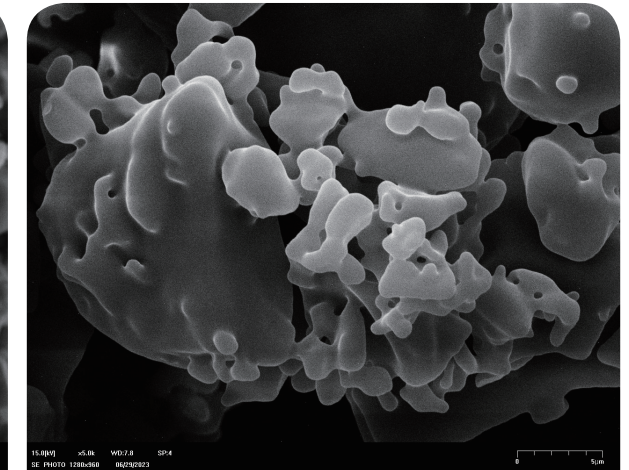


X5.0k Pill Powder

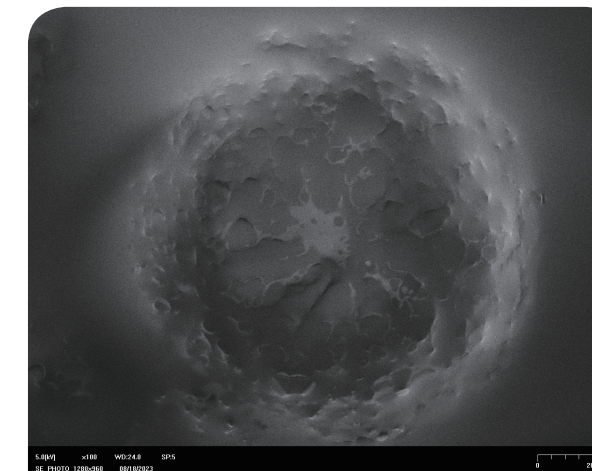


X100 cosmetic materials A

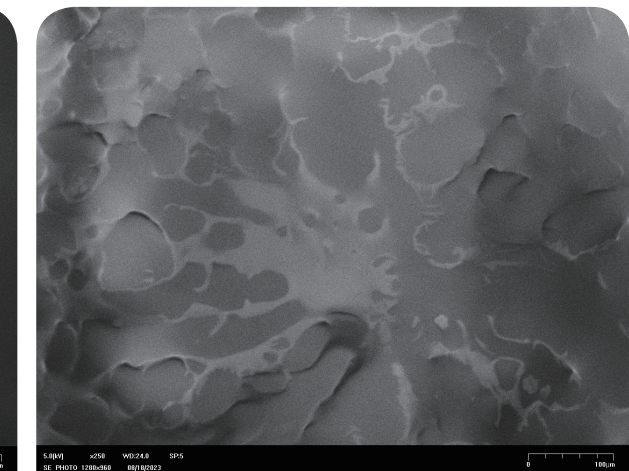

X250 cosmetic materials A

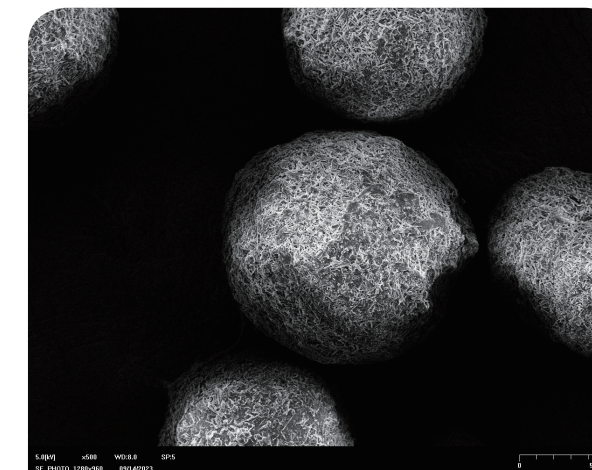

X500 cosmetic materials B

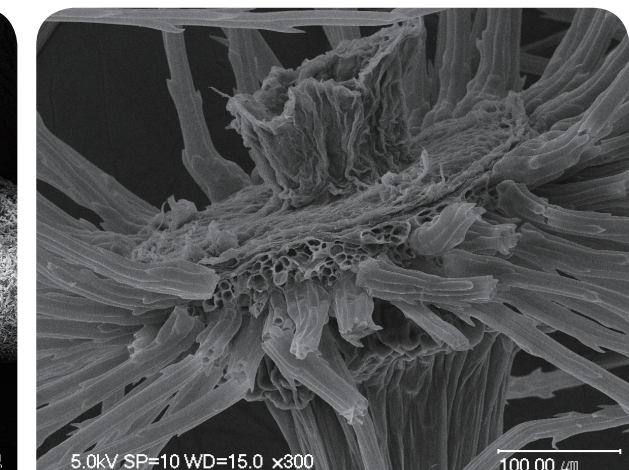

X300 Dandelion

Features

- Sample exchange time within 60s
- Magnification 20 x to 300,000 x
- Cost effective compared to others
- Motorized 5-axis (X, Y, Z, R, T) stage
- Available simple and fast installation

Options

- SE (PV-100)
- SE & EDS (PV-100+)
- SE & BSE (PV-150)
- SE, BSE&EDS (PV-150+)


Specifications

Dimension(mm)	420(W) x 630(L) x 680(H)
Electron Source	Tungsten Filament
Resolution	5.0 nm
Magnification	20 x ~ 300,000 x
Effective Magnification	~ 70,000 x
Electron Gun Vac. System	10 ⁻⁶ torr
Accelerating Voltage	1 ~ 30 kV
Motorized Stage	X, Y, Z, R, T
Vacuum System	Rotary Pump, TMP




PE-100 Series


The PE-100 is a compact SEM with full-size performance. Supplied with a tungsten filament source, the PE-100 has an effective magnification of over 100,000 x. Ideal for imaging larger samples due to its oversize chamber, the PE-100 comes with an impressive set of features typically seen on more expensive microscopes, including both a Navigation Camera and a Chamber Camera for increased versatility.

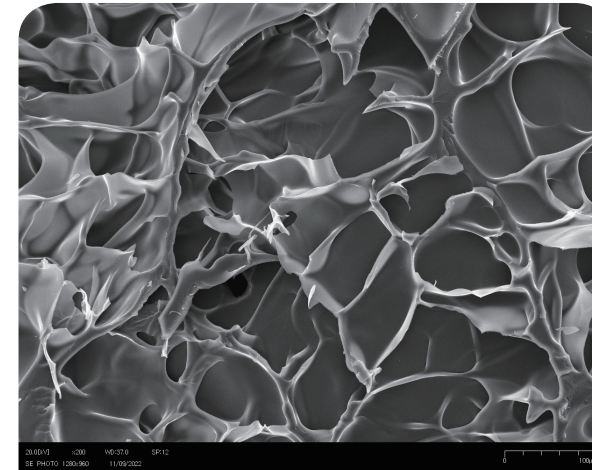


X200 Bio

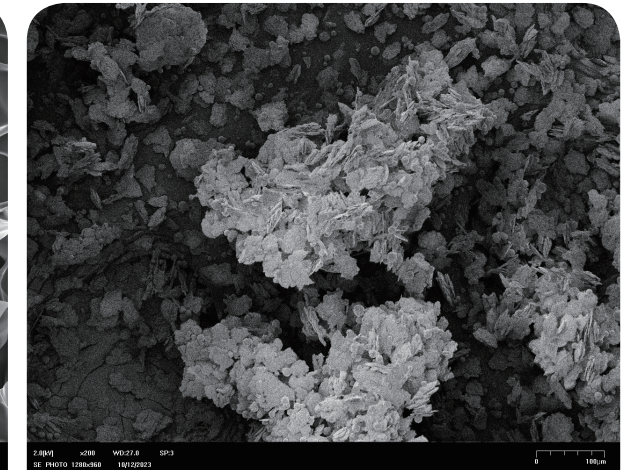


X200 cosmetic materials C

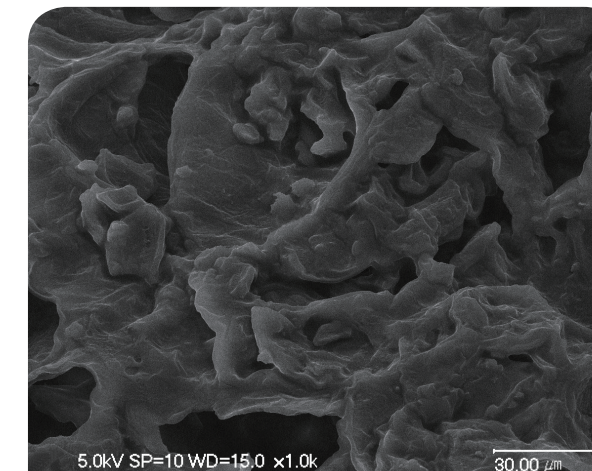


X1.0k Coffee Grounds

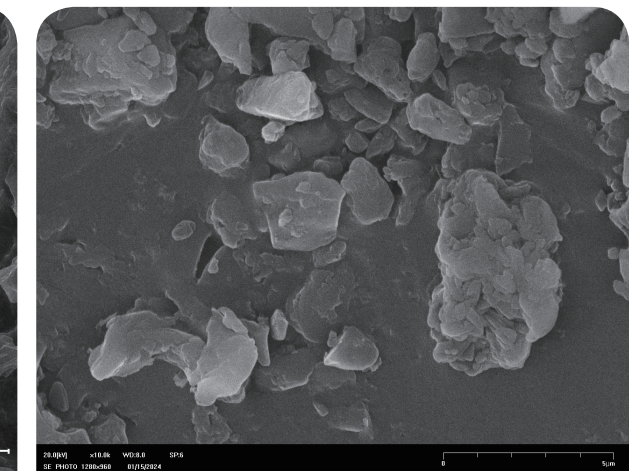

X10.0k cosmetic materials D

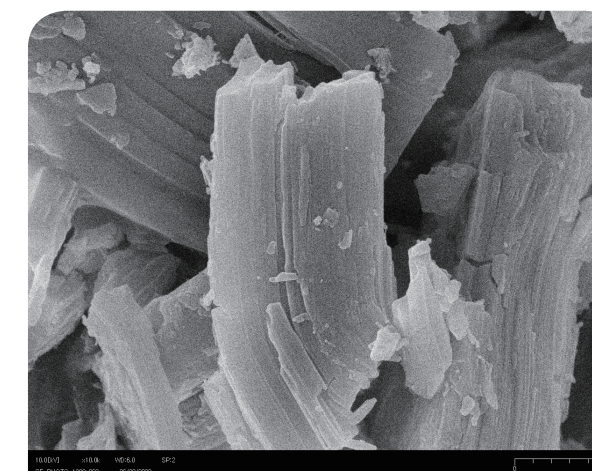

X10.0k Pill Powder

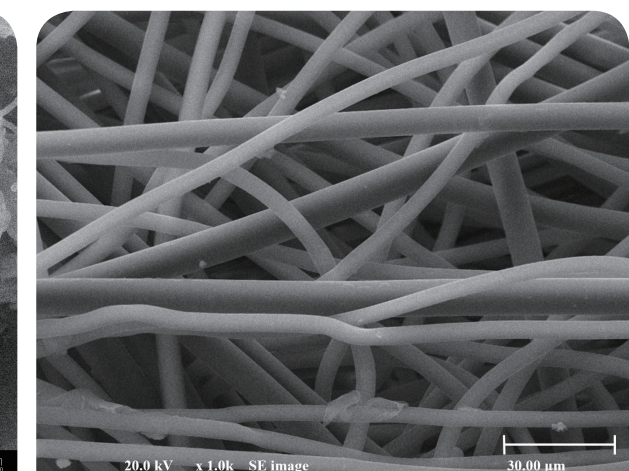

X1000 Dust Mask

Features

- Magnification 20 x to 300,000 x
- Motorized 5-axis (X, Y, Z, R, T) stage
- Sample exchange time within 60s
- Navigation Cam, Chamber Cam
- Easy to take large samples

Options

- SE (PE-100)
- SE & EDS (PE-100+)
- SE & BSE (PE-150)
- SE, BSE & EDS (PE-150+)


Specifications

Dimension(mm)	680(W) x 780(L) x 1460(H)
Electron Source	Tungsten Filament
Resolution	3.0 nm
Magnification	20 x ~ 300,000 x
Effective Magnification	~ 100,000 x
Electron Gun Vac. System	10 ⁻⁶ torr
Accelerating Voltage	1 ~ 30 kV
Motorized Stage	X, Y, Z, R, T
Vacuum System	Rotary Pump, TMP




PE-300 Series


The PE-300 is a Field Emission (Schottky) SEM with high resolution and contrast, allowing users to obtain detailed image information. The PE-300 features our innovative compact FE electron gun made of mild steel with double O-ring sealing providing fast and accurate gun axis adjustment. With superior quality and a competitive price, the PE-300 is the ideal tool when your application requires high resolution and exceptional imaging.

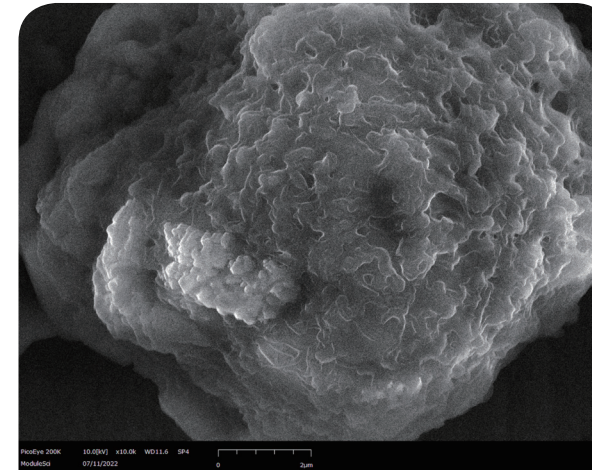


X10.0k Stem Cells

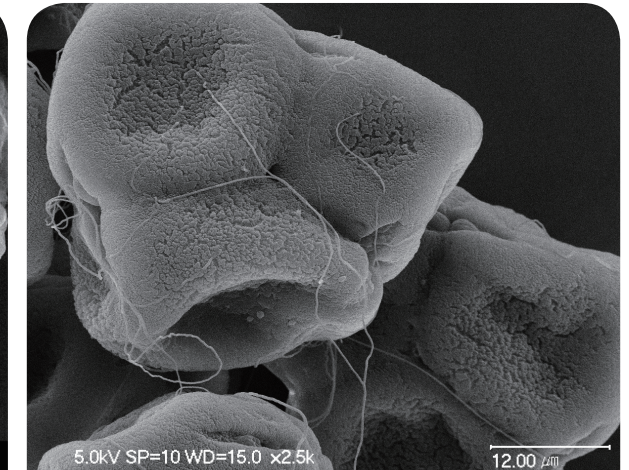


X2.5k Pollen

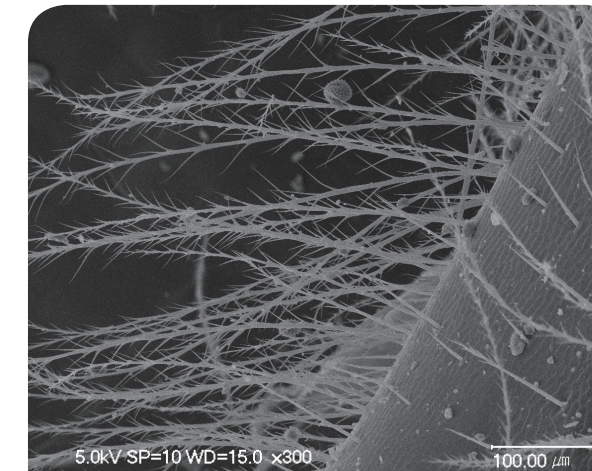

X300 Insect Legs

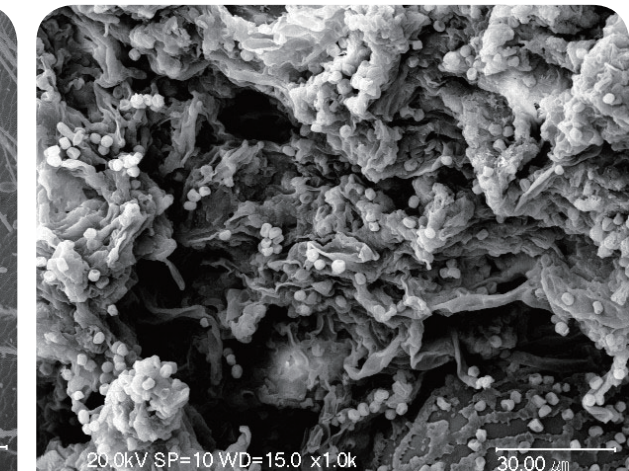

X1.0k Mold

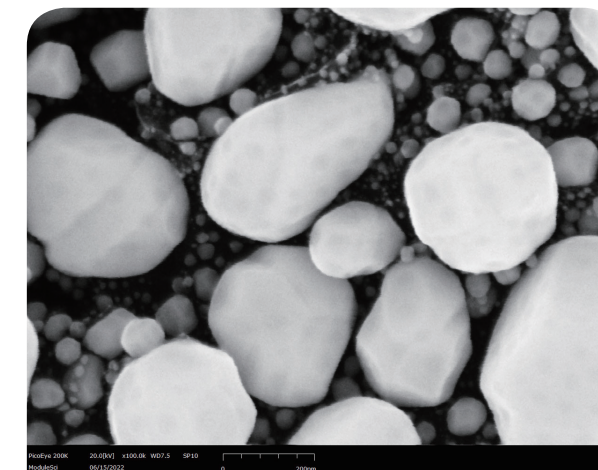

X100.0k Gold Particles

Features

- Magnification 20 x to 300,000 x
- Sample exchange to imaging within 90s
- High quality images (2.0 nm resolution)
- Motorized 5-axis (X, Y, Z, R, T)stage
- Vacuum maintenance until next filament replacement (after first installation of electron gun filament)
- Easy maintenance

Options

- SE (PE-300)
- SE & EDS (PE-300+)
- SE & BSE (PE-350)
- SE, BSE & EDS (PE-350+)

Specifications

Dimension(mm)	750(W) x 780(L) x 1700(H)
Electron Source	FE (Schottky)
Resolution	2.0 nm
Magnification	20 x ~ 300,000 x
Effective Magnification	~ 200,000 x
Electron Gun Vac. System	10 ⁻¹⁰ torr
Accelerating Voltage	0.5 ~ 30 kV
Motorized Stage	X, Y, Z, R, T
Vacuum System	Rotary Pump, TMP, Ion Pump



Open Application Interface

PICOSMART software features an intuitive GUI, making it easy for novice users to generate high-quality images quickly and easily. Advanced automation features guide the user through the imaging process, while a comprehensive suite of analysis tools ensures accurate sample characterization.

Features

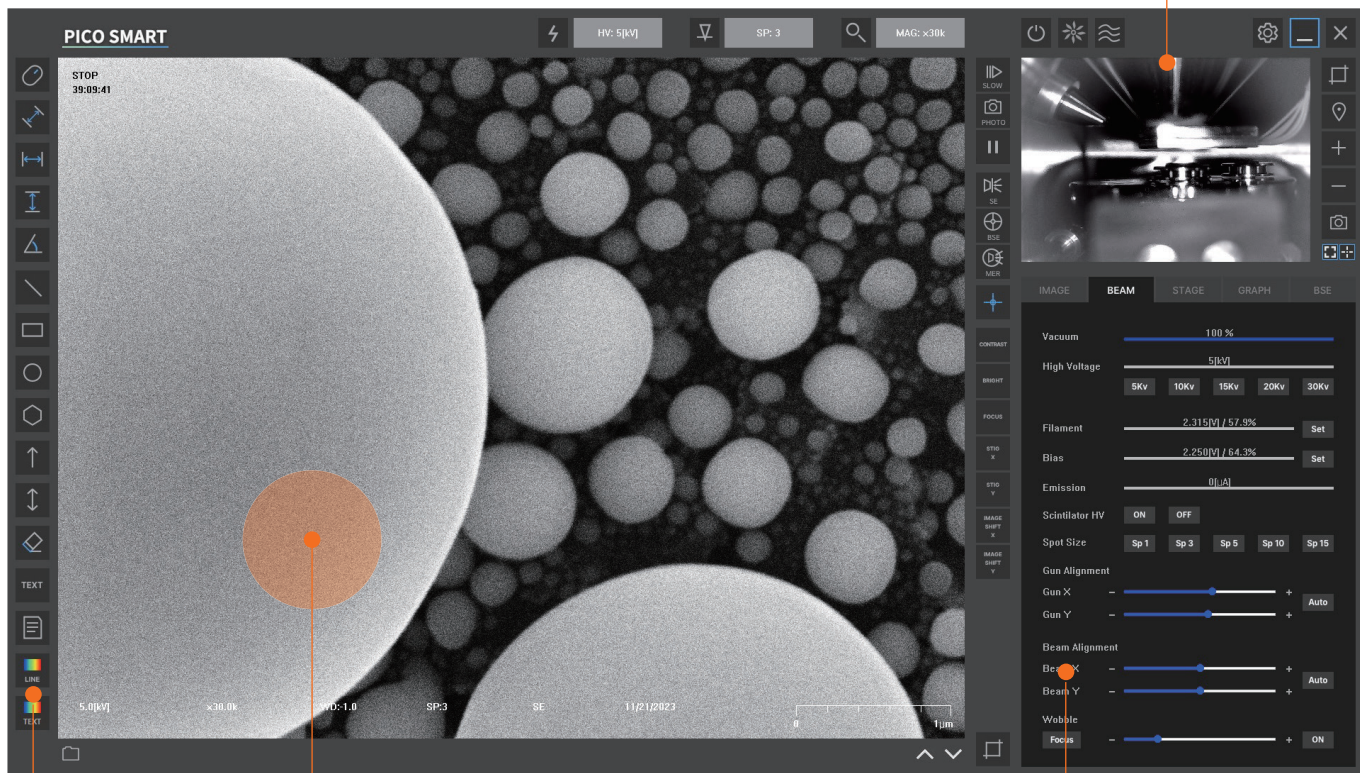


Image Tool Tab


Screen View

Chamber Cam



Function Operation Tab



Specimen Holder

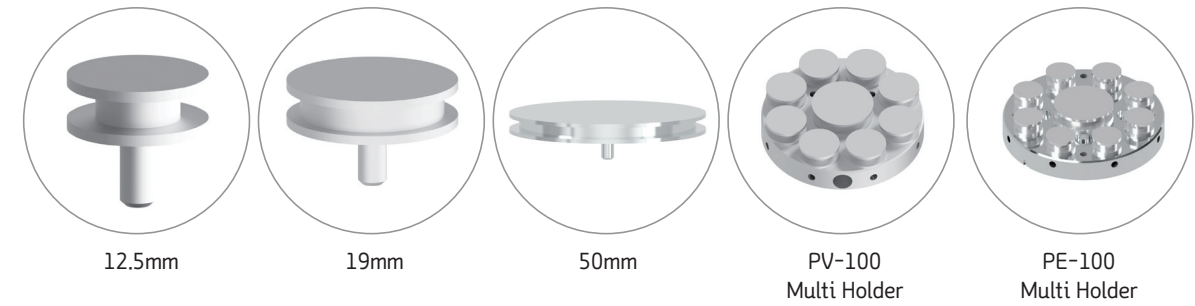

BSE Detector (Back Scattered Electron)

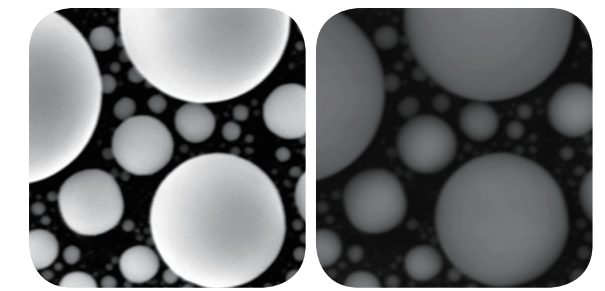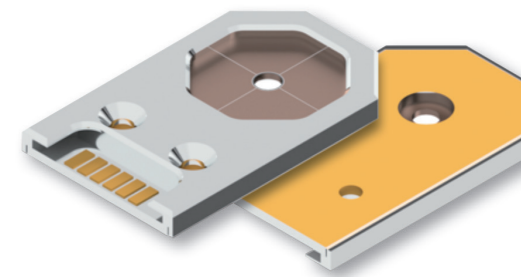


Our 4 Quadrant BSE detector can be configured in either Composition Mode (all 4 quadrants selected) or Topographic Mode (any 2 quadrants selected).

A BSE detector can be used to help determine elemental composition by collecting electrons that are reflected, or scattered, by elements of different atomic number. Elements with a higher atomic number, or "Z", will appear as brighter areas in the sample. BSE detectors are also useful for rapidly determining the number of phases in a sample, and their relationship to one another.

EDS Detector (Energy Dispersive X-ray Spectroscopy)

BRUKER

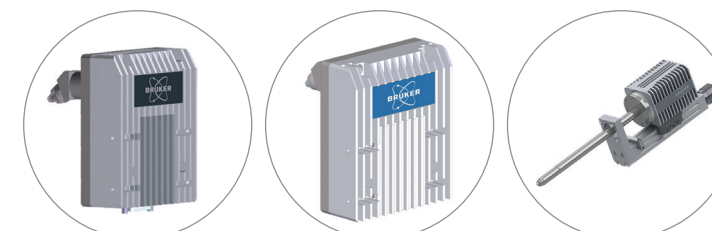

Compact Type

Compact Type 2

Slide Type

OXFORD



Compact Type

Slide Type




Specification Table

Items / Model	PV-100	PE-100	PE-300
Resolution	5.0 nm	3.0 nm	2.0 nm
Magnification	20 x ~ 300,000 x	20 x ~ 300,000 x	20 x ~ 300,000 x
Acceleration Voltages	1 to 30Kv	1 to 30Kv	0.5 to 30Kv
Vacuum Mode	High Vacuum		
Maximum Specimen Size	100(D) x 40(H)	140(D) x 45(H)	140(D) x 45(H)
Observation Size	X=50, Y=50		
Stage	5 Axis Motorized		
X	50 mm		30 mm
Y	50 mm		30 mm
Z	5 ~ 45 mm		5 ~ 50 mm
R	360°		
T	- 10° ~ 90°		- 20° ~ 45°
Maximum Height	40		45
Electron Gun	Tungsten		Field Emission (Schottky Type)
Detector	SED(Standard)		
Control	Mouse		
	Keyboard		
	Joystick(Monogram)		
Auto Function	Auto Gun Align / Auto Focus / Auto Brightness / Auto Contrast		
Option	EDS / BSE / Monogram		
Dimension	420(W) x 630(L) x 680(H) mm	680(W) x 780(L) x 1460(H) mm	750(W) x 780(L) x 1700(H) mm
Weight	110Kg	310Kg	410Kg

Installation Space

PV-100

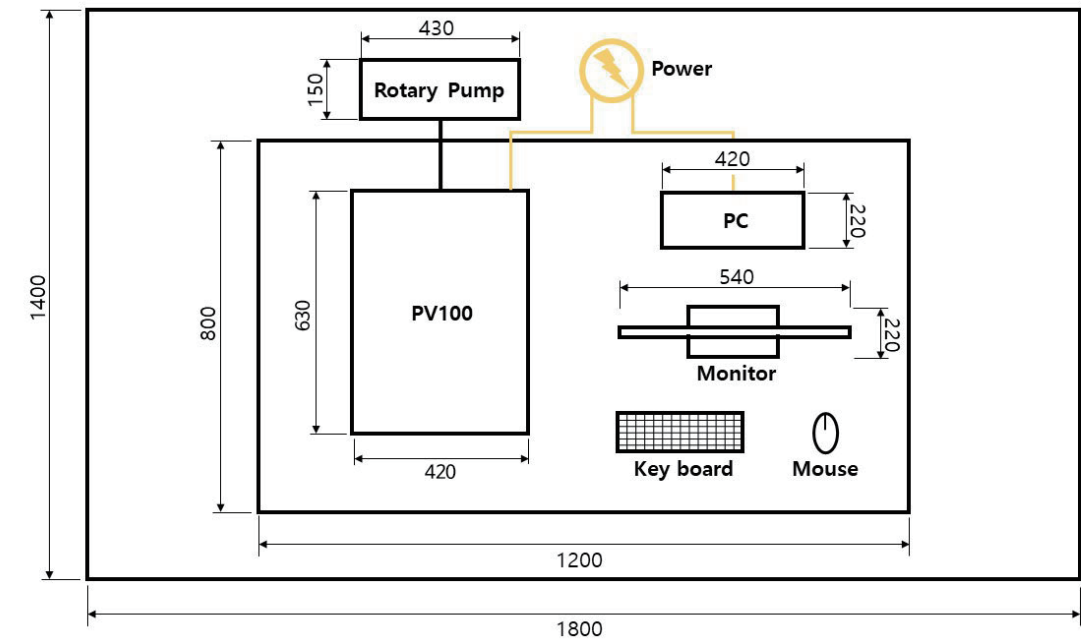

PE-100

