


**FULL
BODY**
VITRIFIED TILES

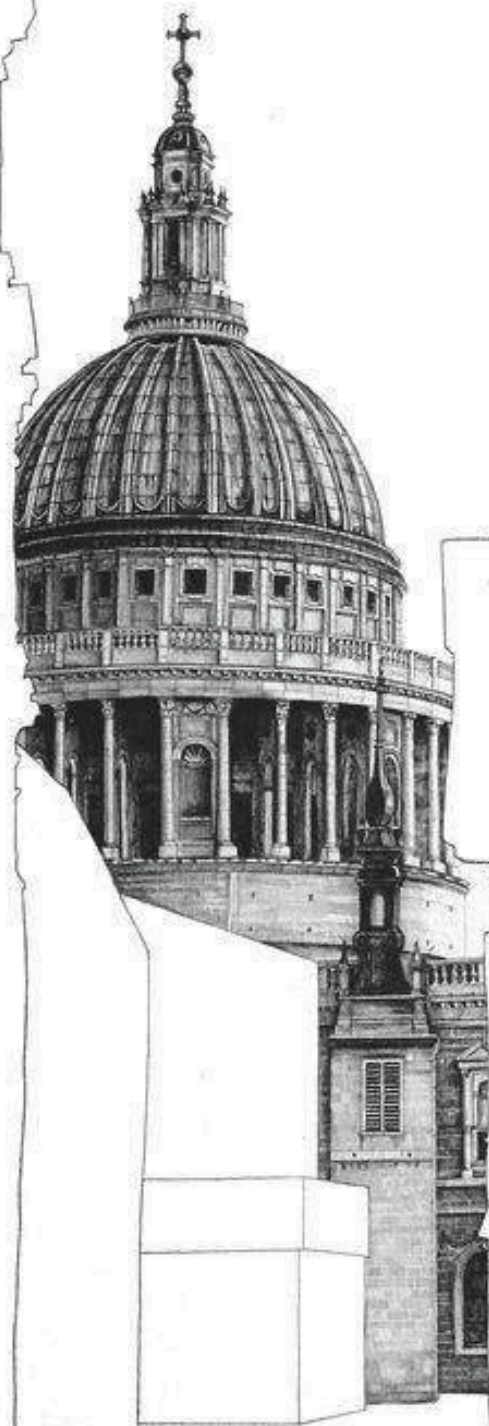


Madlyn™
Level Up

BLAST
PUNCH

600 x
600 mm




Thickness
In mm **9**




The Thicknesses Are One Of The Most Important Elements Characterizing.

15 Mm Is Set Aside For The Most Demanding Product Applications Such As Kitchen Countertops.



600 x 600 mm

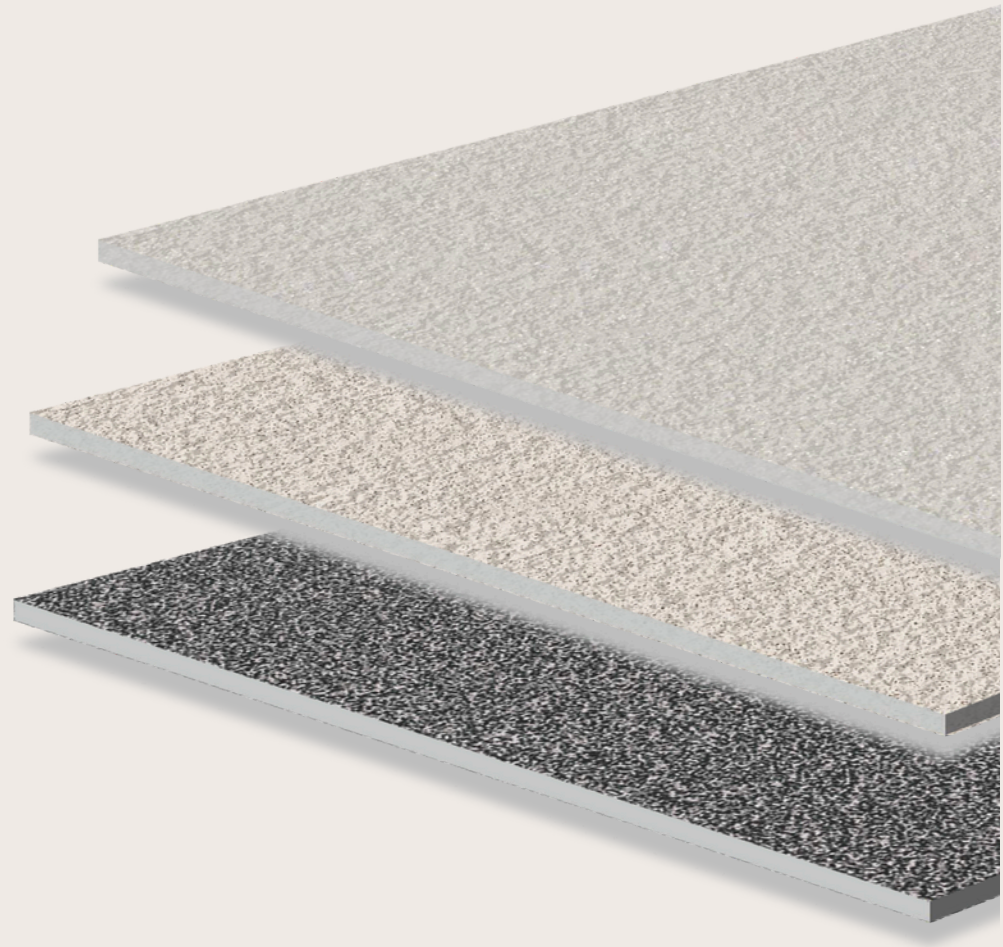




BLAST
PUNCH

BLAST SANDY CREMA



Thickness
In mm **9**



LIGHT
Series

**FULL
BODY**
VITRIFIED TILES

Madlyn™
Level Up

600 X
600 mm | **Satin**




Madlyn™
Level Up


BLAST SANDY CREMA

BLAST
PUNCH

BLAST SANDY DOVE

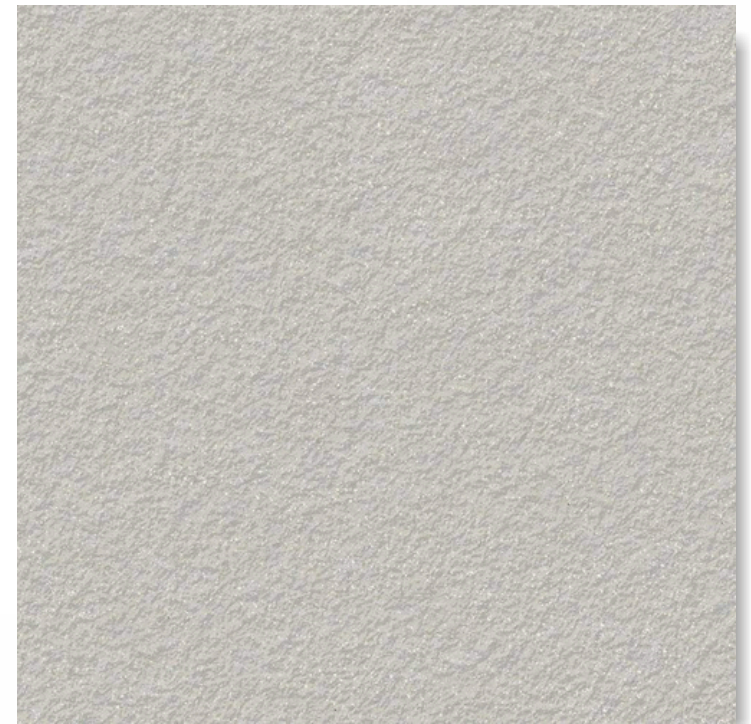

Thickness
In mm **9**



LIGHT
Series

**FULL
BODY**
VITRIFIED TILES


Madlyn™
Level Up

600 X
600 mm | **Satin**




Madlyn™
Level Up

BLAST SANDY DOVE

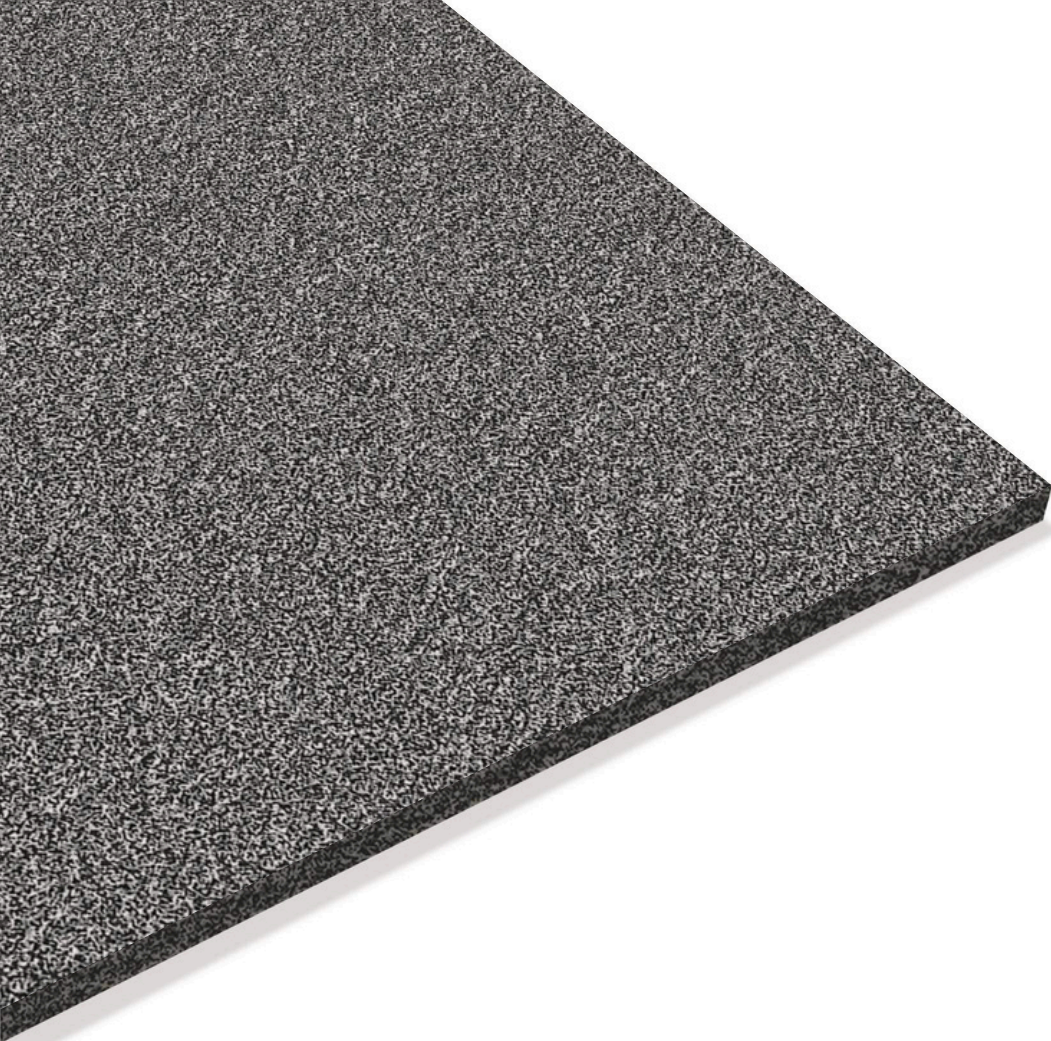


BLAST
PUNCH

BLAST SANDY MIST

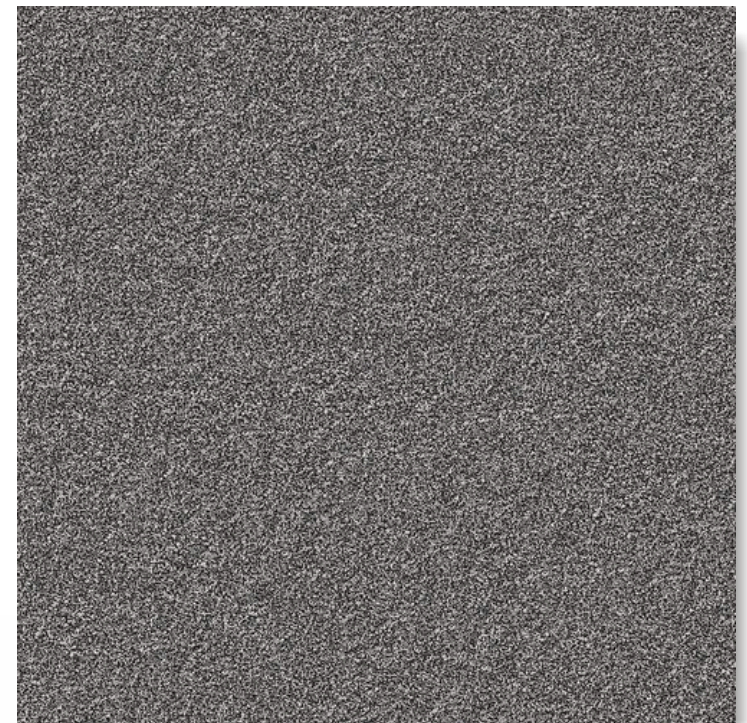

Thickness
In mm **9**



LIGHT
Series

**FULL
BODY**
VITRIFIED TILES

Madlyn™
Level Up

600 X
600 mm | **Satin**



Madlyn™
Level Up

BLAST SANDY MIST




BLAST
PUNCH

BLAST SANDY NERO



Thickness
In mm **9**



DARK
Series

**FULL
BODY**
VITRIFIED TILES

Madlyn™
Level Up

600 X
600 mm | **Satin**



Madlyn™
Level Up

BLAST SANDY NERO




BLAST
PUNCH

BLAST SANDY CHOCO



Thickness
In mm **9**




DARK
Series

**FULL
BODY**
VITRIFIED TILES

Madlyn™
Level Up

600 X
600 mm | **Satin**

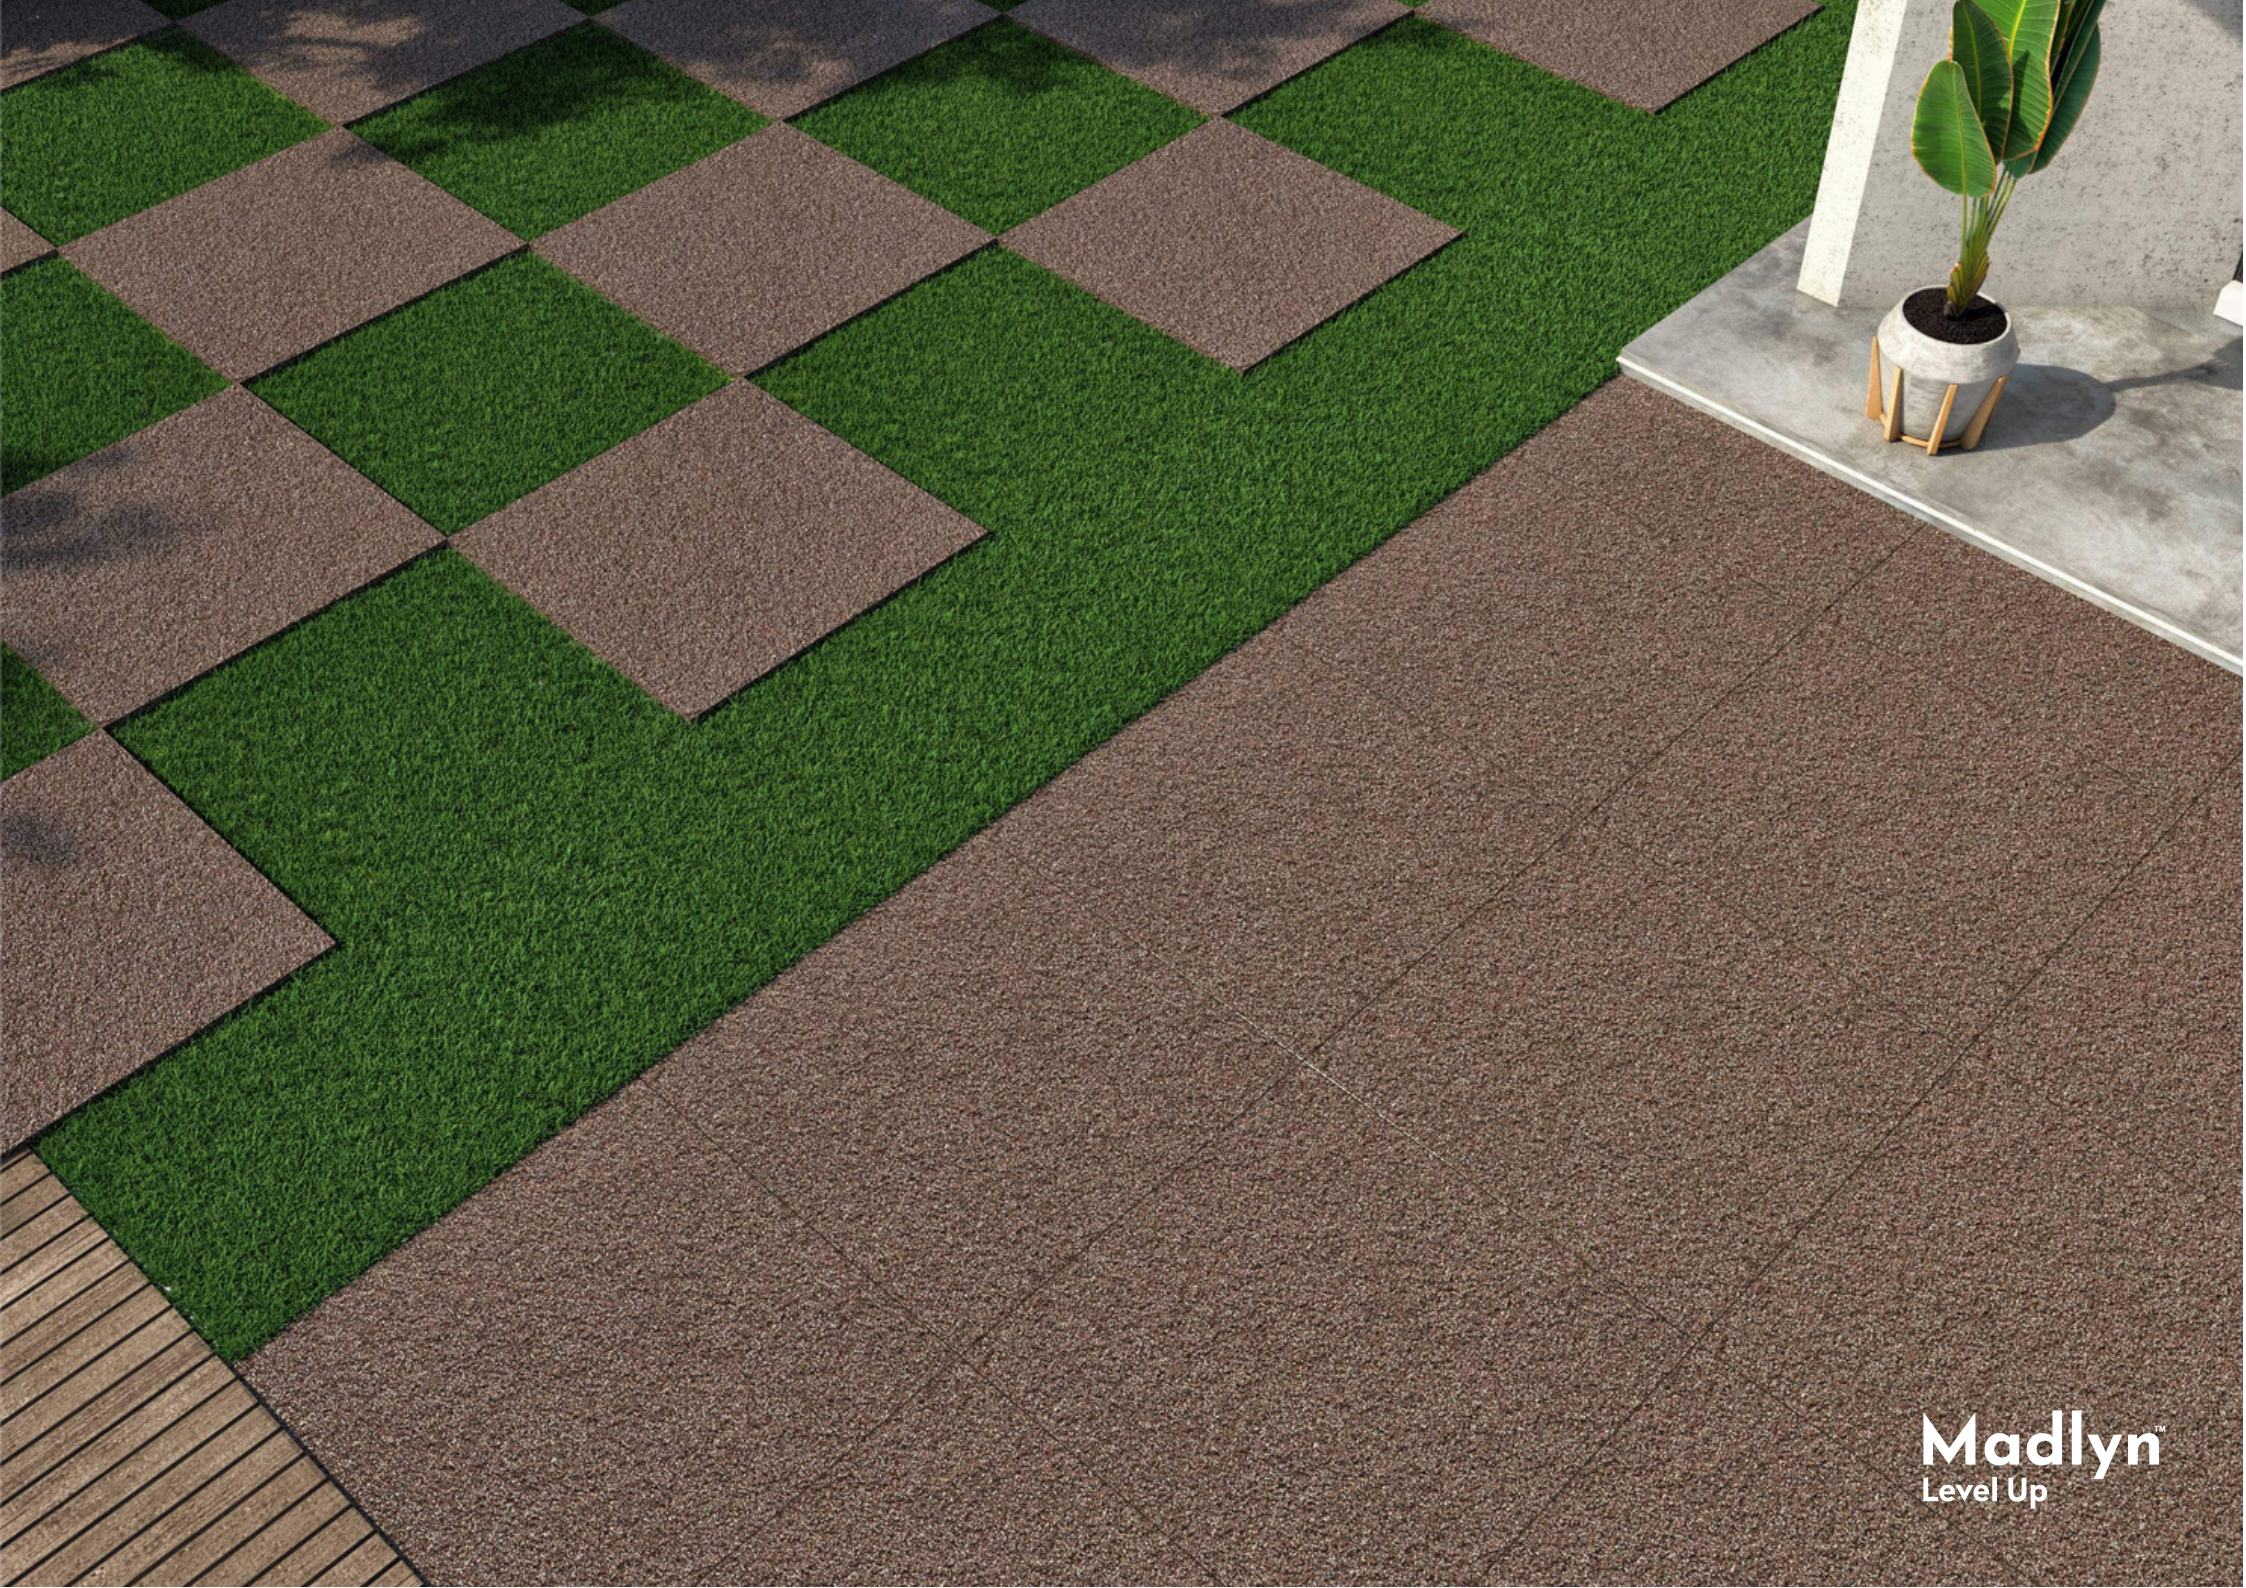

Madlyn™
Level Up



Direct Installation On Grass

Ideal for: Gardens, gazebos, walkways.

- 1- Remove the soil below the area where the sheet will be laid to a thickness of about 5-6 cm
- 2- apply gravel to a thickness of about 3-4 cm and compact the foundation
- 3- Rest the sheets - with at least 1 cm of gap - on the gravel bed and use a rubber hammer to eliminate any unevenness.



Installation On Gravel And Sand



LAYING DIRECTLY ON GRASS

Laying With Close Joints



Laying With Close Joints





- A. Tile
B. Fine gravel or sandy laying bed
C. Ground

Installation On Gravel And Sand

Ideal for: gardens, patios, courtyards, pedestrian walkways, beach resorts, perimeter areas in pools.

- 1- Compact the level of the resting layer (sand or gravel)
- 2- Lay the sheet on the bed of gravel or sand, maintaining a minimum gap of 1 cm or wider
- 3- Use a rubber hammer to eliminate any unevenness
- 4- Fill in the joints between the sheets with gravel or sand to provide greater stability to the surface

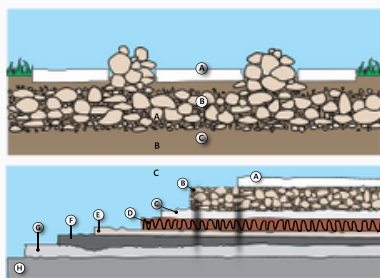

- A. Tile
B. Fine gravel or sandy laying bed
C. Concrete screed (may include electro welded mesh)
D. Reinforcement layer
E. Concrete screed
F. Loose stone foundation (gravel)
G. Soil

TECHNICAL SPECIFICATION

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP Bla	MEAN VALUE OF OUR FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	±0.60%	±0.10%	ISO-10545-2
Deviation In Thickness	±5.00%	±2.00%	ISO-10545-2
Straightness Of Sides	±0.50%	±0.10%	ISO-10545-2
Rectangularity	±0.60%	±0.10%	ISO-10545-2
Surface Flatness	±0.50%	±0.10%	ISO-10545-2
Glossiness	Gloss Meter	Min. 90%	Glossmeter
Water Absorption	≤0.50%	E≤0.05%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm ³	Max. 145mm ³	ISO-10545-6
Moh's Hardness	Min. 6	≥ 6*	EN 101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion	<9x10 ⁻⁶	≥ 6 x 10 ⁻⁶	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage	ISO-10545-13
Stain Resistance	Resistance	Resistance	ISO-10545-14
Slip Resistance (friction Co Efficient)	> 0.40	> 0.40	ISO-10545-17

DISCLAIMER:
Icon reserve the right to delete & amend either totally or partially, any of the colors, shapes, sizes, reference and other technical specifications contained in this catalogue at anytime. The colors of tile shown in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors and reference should be verified for typographical errors.

PACKING DETAILS

	SIZE	Pcs. / Box	Weight / Box (Approx.)	Coverage Area / Box	
			Matt		
FULL BODY	600 x 600 mm	4 pcs.	28 Kg	15.5 / Sq. Feet	1.44 / Mtr ²

Madlyn

Level Up

MADLYN EXPORTS LLP

REGISTERED OFFICE :-

"OFFICE NO 504, FIFTH FLOOR, EDEN CERAMIC CITY, 8A NATIONAL HIGHWAY, MORBI-363 642, GUJARAT INDIA."

Email address :- info@madlynexport.com

CUSTOMER CARE:

+91 98398 79379

+91 96734 33338

+91 79846 80399

www.madlynexport.com