


The most robust cleaver



Fiber Cleaver

Fujikura CT50

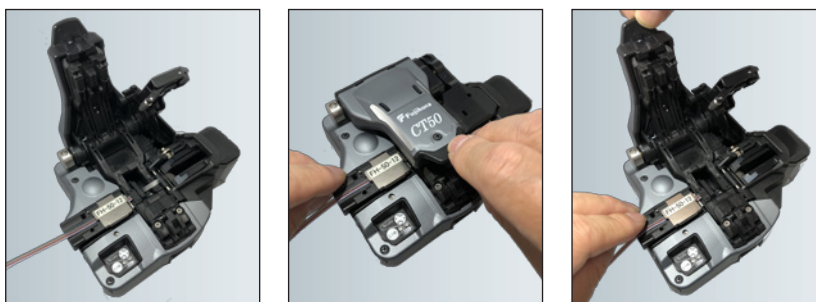

- Applicable for up to 12-fiber cleaving
- Automatic cleaving blade rotation via wireless data communication
- User replaceable fiber clamps and cleaving blade
- Blade life up to 60,000 cleaves
- Wide lever opening angle allows easy fiber placement
- Single-action operation including fiber scrap collection

Newly Installed



Fujikura CT50

SPECIFICATIONS

Description	CT50	
Applicable optical fiber	Silica optical fiber	
Fiber count	Up to 12	
Cladding diameter	125 μm	
Coating diameter	160 to 900μm, 2 to 3mm cord and drop cable	
Cleaving length	AD-10-M24	5mm to 20mm (coating diameter = 250μm)
	AD-50	10mm to 20mm (coating diameter > 250μm)
	Fiber holder	10mm (from the edge of FH:13mm)
Cleaving angle*1	Typical 0.7 degrees with single fiber	
Blade life	Typical 60,000 fibers	
Wireless data communication	Wireless technical standard:Bluetooth® 4.1 LE*2 OS : Android 5.0 or above, iOS 8.0 or above (iPhone6 above)	
Power supply	AAA (LR03) dry battery: 2pcs	
Dimensions / Weight	120(W)x95(D)x58(H)mm / 300g (including battery)	
Operation condition	Temperature : -10 to 50deg C	
	Humidity : less than 95%RH, non-dew	
Storage condition	Temperature : -40 to 80deg C	
	Humidity : less than 95%RH, non-dew	
Resistance features*3	Shock: 76cm (30inch) all directions drop	
	Dust resistance: Exposure to dust (0.1 to 500μm dia. Alumina Silicate)	
	Rain resistance: H=10mm/hr for 10min	

*1 The optical fiber type, the blade condition or the operating environment may affect the cleaving angle. Since the measuring device has been changed from an interference microscope to a fusion splicer, this specification value is now higher than that of the previous model (CT-30).


*2 The wireless data communication of this product is not guaranteed to work with all smartphones or other devices.

*3 The shock, dust and rain resistance test does not guarantee the product will not be damaged under these conditions.

• Bluetooth® and Bluetooth logo is a registered trademark of Bluetooth SIG, Inc.



STANDARD PACKAGE

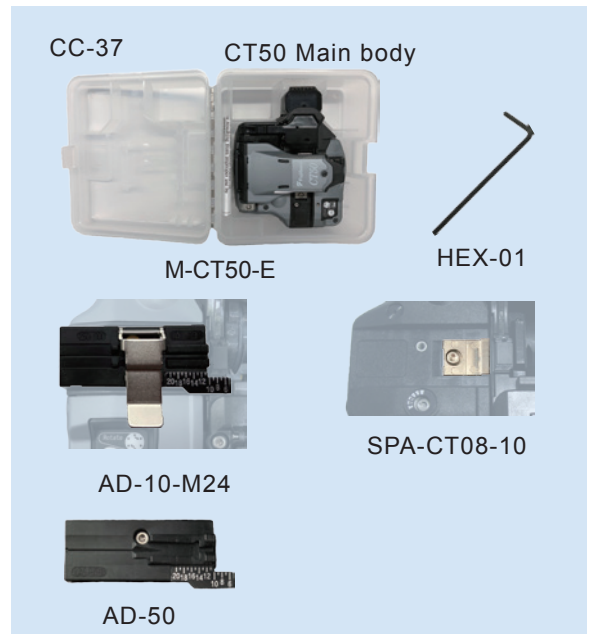

OPTIONAL ITEMS



STANDARD PACKAGE

Description	Model No.	Q'ty
Fiber cleaver	CT50	1pc
Fiber plate	AD-10-M24	1pc
Fiber plate	AD-50	1pc
Spacer	SPA-CT08-10	1pc
Carrying case	CC-37	1pc
Hexagonal wrench	HEX-01	1pc
Instruction manual	M-CT50-E	1pc

OPTIONAL ITEMS

Description	Model No.
Blade	CB-08
Arm set	ARM-CT50-01
Dust box	FDB-05
Side cover	SC-CT50-01

FIBER HOLDERS

Description	Model No.
Applicable fiber holder*4	FH-70-xxx
	FH-100-xxx

*4 It is available to use previous fiber holder "FH-50" series and "FH-60" series



Please visit our web site!

<https://www.fusionsplicer.fujikura.com>

Specifications and descriptions are subject to change without prior notice. ©2018 Fujikura Ltd.

Fujikura Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan
Phone:+81-3-5606-1164 Fax:+81-3-5606-1534 <http://www.fujikura.com>

Fujikura Asia Ltd.

438A Alexandra Road, Block A Alexandra Technopark #08-03 Singapore 119967
Phone:+65-6-278-8955 Fax:+65-6-278-0965 <http://www.fujikura.com.sg>

Fujikura Europe Ltd.

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey KT9 2NY, UK
Phone:+44-20-8240-2000 Fax:+44-20-8240-2010 <http://www.fujikura.co.uk>

AFL

260, Parkway East, Duncan, SC29334, USA
Phone:+1-800-235-3423 Fax:+1-800-926-0007 <http://www.afglobal.com>

Fujikura (China) Co., Ltd.

7th Floor, Shanghai Hang Seng Bank Tower, 1000 Lujiazui Ring Road, Pudong New Area, Shanghai, 200120 CHINA
Phone:+86-21-6841-3636 FAX:+86-21-6841-2070