

Eminence



20
26

CANYON COLLECTION

HIGH END LVP

WWW.EMINENCEFLOORS.COM

SAND DUNE

30MIL



CASCADE

30MIL



YOSEMITE

30MIL



ACADIA

30MIL



BISCAYNE

30MIL




DENALI

30MIL



MESA VERDE

30MIL

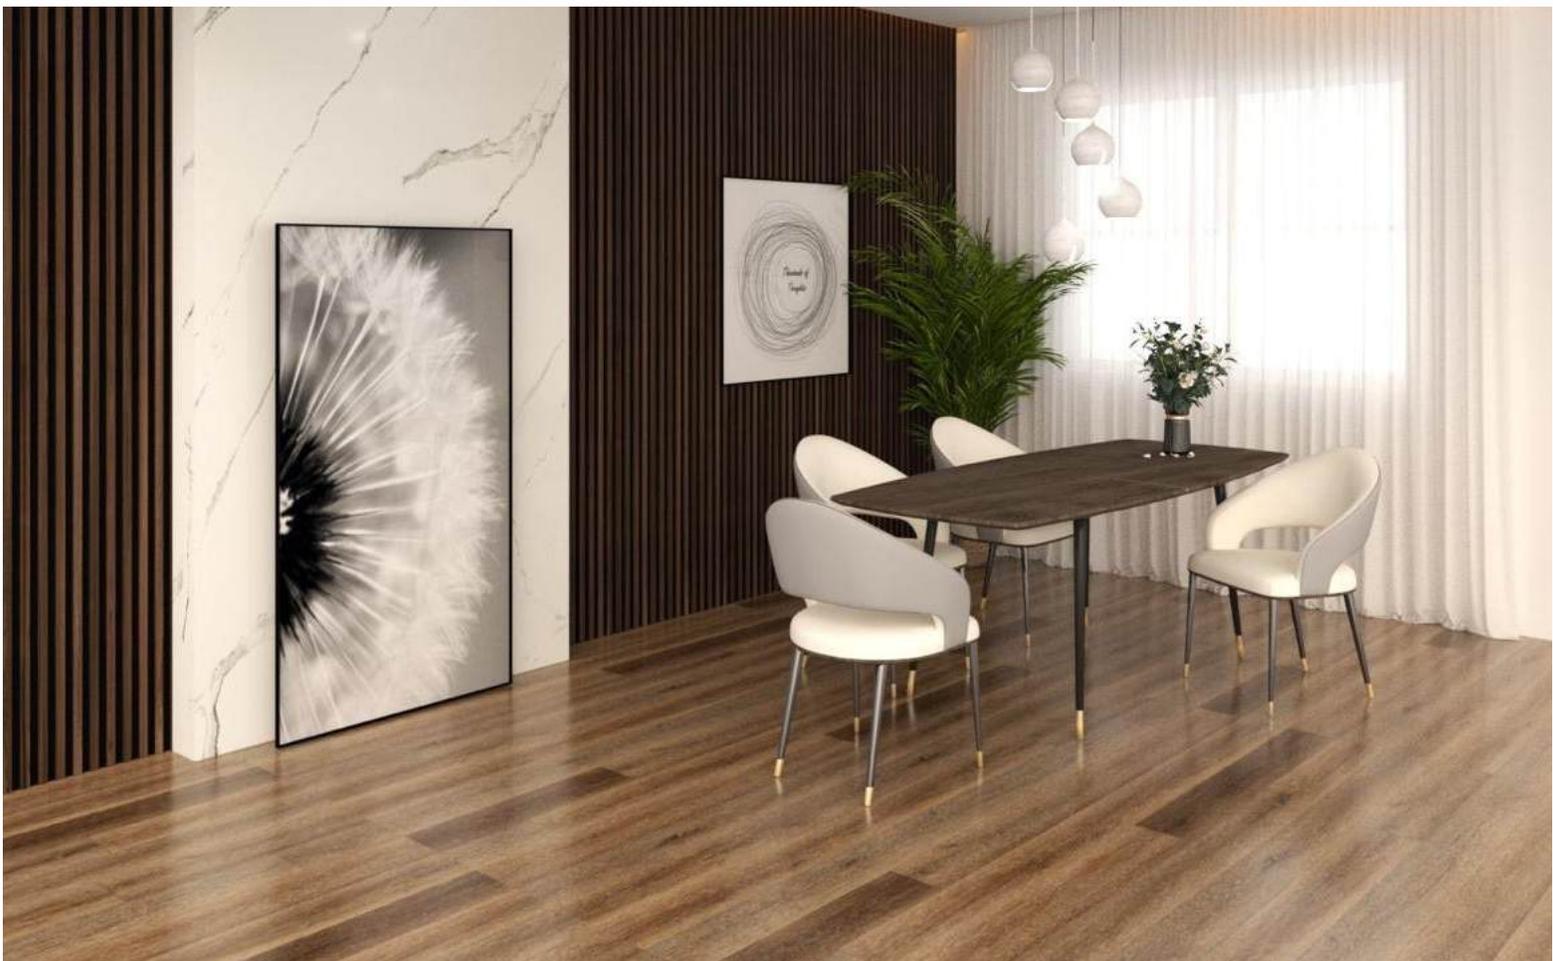

SEQUOIA

30MIL



CHEROKEE

30MIL



KEYSTONE

30MIL



NAVAJO

30MIL



ZION

30MIL



GLACIER

30MIL



SEDONA

30MIL



TECHNICAL SPECIFICATIONS

TOTAL THICKNESS	6MM
IXPE PAD	1MM
WEAR LAYER	30MIL
PLANK SIZE	9"X60"
BEVEL	PAINTED
DIMENSIONAL STABILITY	PASSES
RESIDUAL INDENTATION	PASSES (PSI EQUIVALENT >5,000 LBS)
HEAT STABILITY	PASSES
LIGHT STABILITY	PASSES
RADIANT PANEL	>0.45 watts/CM ² , NFPA Class 1
IIC	67
STC	68
CHEMICAL RESISTANCE	PASSES
VOC REQUIREMENTS	PASSES <100 MG/M
COEFFICIENT TO FRICTION	>0.6 (DRY)
INSTALLATION	UNILIN ANGLE
CERTIFICATIONS	FLOORSCORE AND GREENGUARD
RESIDENTIAL WARRANTY	25 YEARS