

B-V230WN1(AU) 202403



# MDV-V230WN1(AU) R410A Mini VRF



DISCOVER  
**RELIABLE COMFORT**

2024

## All Flare\* Connections, The Easiest VRF to Install


The system uses all flare connection which can greatly simplify installation.

A single outdoor unit supports 1 indoor unit



Note: Only MI2-230TIDHNI(AU) indoor unit can be connected.

A single outdoor unit supports 12 indoor units

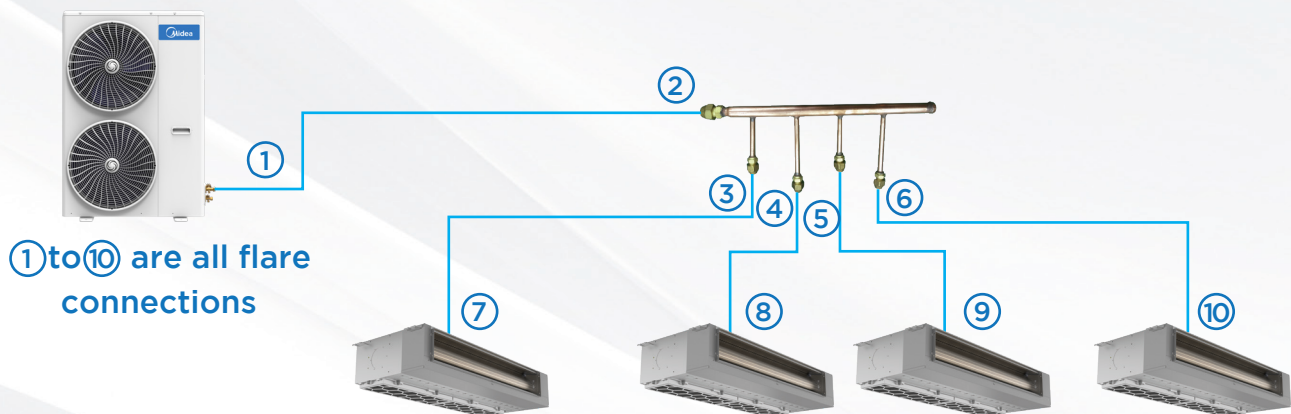


Note:

\*Reused flared branch joints are not permitted for indoor use..

## Installation of Duct in Sections


High Static Pressure Duct units support installation in sections, reducing the weight and size of individual units for easy handling and installation.

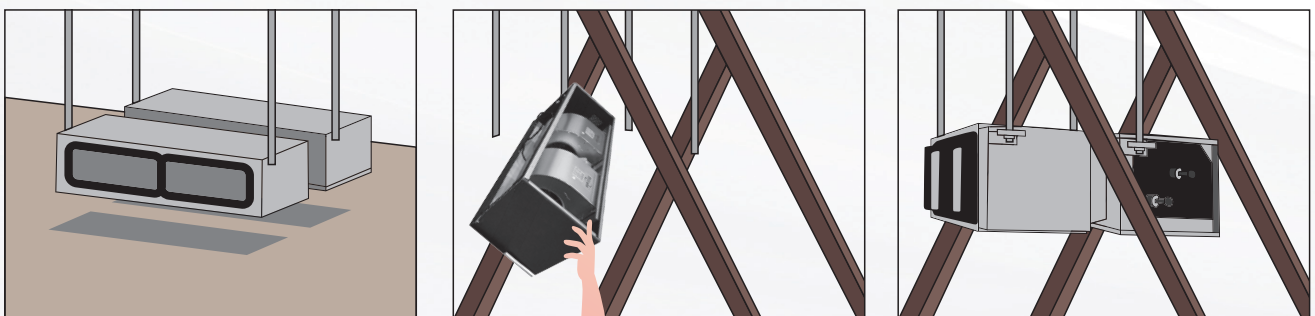



## Less Required Space for Mini VRF Installation

Mini VRF use flare connections instead of welding, which facilitates owners a lot to save their cost for installation, as well as avoid health hazard by welding such as strip-lighting or extra-high temperature.

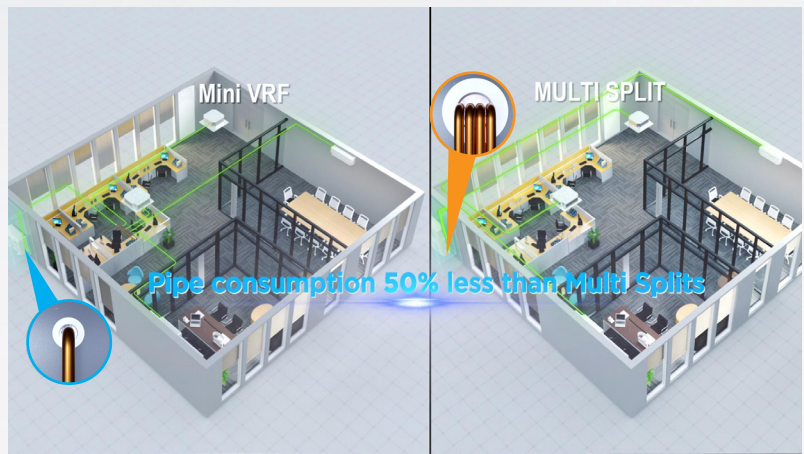


Comparing with multi split, Mini VRF has some distinctive advantages as follows:

- ◆ less pipe space requirement
- ◆ Less pipe consumption
- ◆ No special requirement for pipe holes
- ◆ keep your house neat and tidy.

## Longer Piping Capability





The Mini VRF provides a total piping length possibility of 200m, a maximum height difference between outdoor and indoor units of 20m. These generous allowances facilitate an extensive array of system designs.

Piping length / Height difference		Capability (m)
Total piping length		200
1. Longest piping length	Actual	80
	Equivalent	90
2. Longest piping length after first branch		20
3. Largest level difference between IDUs and ODU	ODU up	30
	ODU down	20
4. Largest level difference between IDUs		8

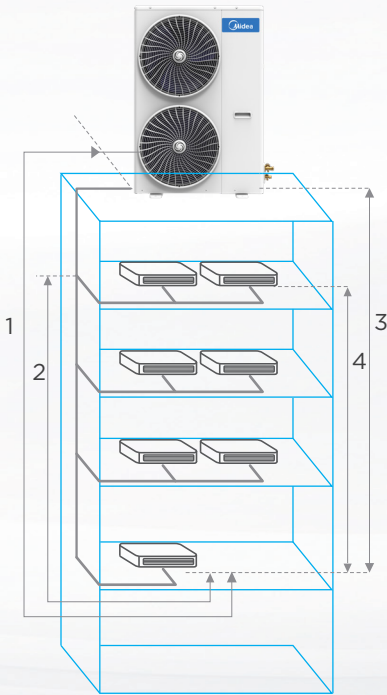



## Full DC Inverter Technology

The Mini VRF uses full DC inverter compressor and fan motor to achieve high precision stepless speed adjustment according to system operation, and ensures that the system is always in optimum condition, operating more efficiently, more consistently and with less noise.

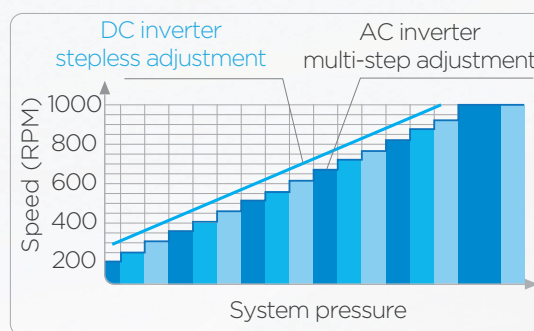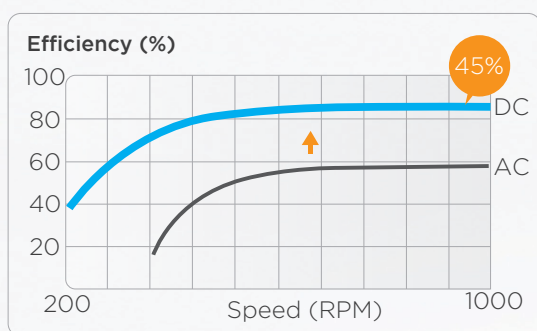


## Wide Operation Range

Mini VRF can operate in a wide ambient temperature range. It can operate stably from -15°C up to 55°C in cooling mode and from -20°C to 27°C in heating mode.

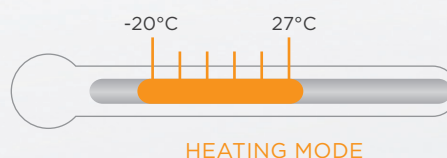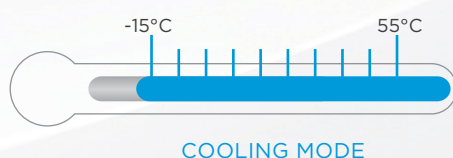


## Static Pressure 20 Steps Control

Depending on the installation environment, Duct is controlled the static pressure up to 20 steps via wired remote controller, for providing comfortable environment suitable for any environment.

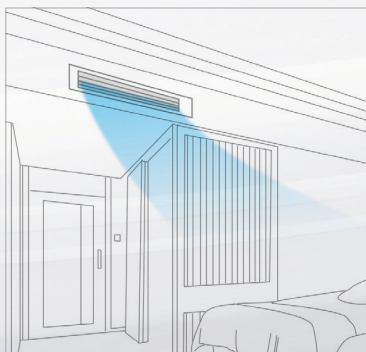

## Multiple Fan Speeds

The DC Series comes with 7 indoor fan speed options to meet the needs of different indoor conditions.

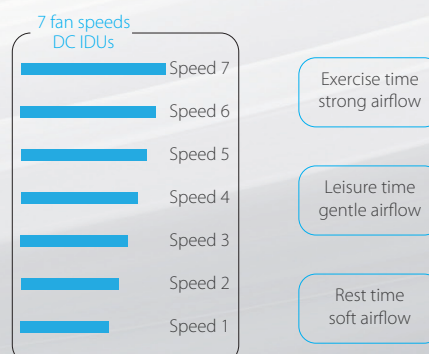

## Specifications

### Outdoor unit

Model			MDV-V230WNI(AU)
Power supply		V/N/Hz	220-240/1/50
Heating	Capacity	kW	23.0
	Power input	kW	5.28
Cooling	Capacity	kW	19.5
	Power input	kW	5.6
Connected indoor unit		Total capacity	60-130% of outdoor unit capacity
		Maximum quantity	12
Ambient temp. operation range	Cooling	°C	-15-55
	Heating	°C	-20-27
Sound pressure level(cooling/heating)		dB(A)	59/59
Refrigerant	Type		R410A
	Charge	Kg	4.4
pipe size	Liquid	mm	9
	Gas	mm	19
	Max. height difference	m	30(ODU up)
		m	20(ODU down)
	Max. piping length	m	80
Net dimension(W×H×D)		mm	902×1327×320
Packing dimension(W×H×D)		mm	1082×1406×434
Net/Gross weight		kg	103/111

Notes:

- Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1m.  
During actual operation, these values are normally somewhat higher as a result of ambient conditions.
- 60-130% is system combination ratio, combination ratio=Sum of capacity indexes of the indoor units/Capacity index of the outdoor units  
\*The above data may be changed without notice for future improvement on quality and performance.

### Indoor unit

#### Arc Duct

Model			MIH15T3HN18	MIH16T3HN18-A	MIH22T3HN18	MIH28T3HN18	MIH36T3HN18	MIH45T3HN18
Power supply			1phase, 220-240V,50/60Hz					
Cooling <sup>1</sup>	Capacity	kW	1.5	1.6	2.2	2.8	3.6	4.5
Heating <sup>2</sup>	Capacity	kW	1.8	1.9	2.5	3.2	4	5
Net dimension (W×H×D)		mm	550×199×450	1100×199×450	550×199×450	550×199×450	700×199×450	900×199×450
Packing dimension (W×H×D)		mm	715×255×525	1300×255×525	715×255×525	715×255×525	865×255×525	1065×255×525
Net/Gross weight		kg	11.5/13.5	20/23.5	11.5/13.5	11.5/13.5	13.0/15.5	16.5/19.5

Model			MIH56T3HN18	MIH71T3HN18	MIH80T3HN18	MIH90T3HN18	MIH112T3HN18
Power supply			1phase, 220-240V,50/60Hz				
Cooling <sup>1</sup>	Capacity	kW	5.6	7.1	8	9	11.2
Heating <sup>2</sup>	Capacity	kW	6.3	8	9	10	12.5
Net dimension (W×H×D)		mm	900×199×450	1100×199×450	1600×199×450	1600×199×450	1600×199×450
Packing dimension (W×H×D)		mm	1065×255×525	1300×255×525	1780×250×525	1780×250×525	1780×250×525
Net/Gross weight		kg	16.5/19.5	20/23.5	28/32.5	28/32.5	28/32.5

Notes:

- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
- Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
- The dimension is only the body size, excluding the size of the installation lug, connecting copper pipe, etc.

#### Medium Static Pressure Duct

Model			MIH15T2HN18	MIH22T2HN18	MIH28T2HN18	MIH36T2HN18	MIH45T2HN18	MIH56T2HN18
Power supply			1phase, 220-240V,50/60Hz					
Cooling <sup>1</sup>	Capacity	kW	1.5	2.2	2.8	3.6	4.5	5.6
Heating <sup>2</sup>	Capacity	kW	1.8	2.5	3.2	4	5	6.3
Net dimension (W×H×D)		mm	600×245×750	600×245×750	600×245×750	600×245×750	600×245×750	800×245×750
Packing dimension (W×H×D)		mm	765×305×885	765×305×885	765×305×885	765×305×885	765×305×885	965×305×885
Net/Gross weight		kg	18.5/21	18.5/21	18.5/21	18.5/21	19.5/22	24/27.5

Model			MIH71T2HN18	MIH80T2HN18	MIH90T2HN18	MIH112T2HN18	MIH140T2HN18	MIH160T2HN18
Power supply			1phase, 220-240V,50/60Hz					
Cooling <sup>1</sup>	Capacity	kW	7.1	8	9	11.2	14	16
Heating <sup>2</sup>	Capacity	kW	8	9	10	12.5	16	18
Net dimension (W×H×D)		mm	800×245×750	1050×245×750	1050×245×750	1400×245×750	1400×245×750	1400×245×750
Packing dimension (W×H×D)		mm	965×305×885	1215×305×885	1215×305×885	1565×305×885	1565×305×885	1565×305×885
Net/Gross weight		kg	25/28.5	30/34.0	31/35.0	37/42.0	39/44.0	39/44.0

Notes:

- Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.
- Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.
- Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.
- The dimension is only the body size, excluding the size of the installation lug, connecting copper pipe, etc.



High Static Pressure Duct

Model			MIH56T1HN18	MIH71T1HN18	MIH80T1HN18	MIH90T1HN18	MIH112T1HN18
Power supply			1phase, 220-240V,50/60Hz				
Cooling <sup>1</sup>	Capacity	kW	5.6	7.1	8	9	11.2
Heating <sup>2</sup>	Capacity	kW	6.3	8	9	10	12.5
Net dimension (W×H×D)		mm	1050×299×750	1050×299×750	1050×299×750	1050×299×750	1400×299×750
Packing dimension (W×H×D)		mm	1215×359×890	1215×359×890	1215×359×890	1215×359×890	1565×359×890
Net/Gross weight		kg	35/38.5	35/38.5	35/38.5	35/38.5	44.5/48.5

Model			MIH125T1HN18	MIH140T1HN18	MIH160T1HN18	MIH200T1HN18	MI2-230T1DHN1(AU)
Power supply			1phase, 220-240V,50/60Hz				
Cooling <sup>1</sup>	Capacity	kW	12.5	14	16	20	19.5
Heating <sup>2</sup>	Capacity	kW	14	16	18	22.5	23
Net dimension (W×H×D)		mm	1400×299×750	1400×299×750	1400×299×750	1300×580×900	1490×300×865
Packing dimension (W×H×D)		mm	1565×359×890	1565×359×890	1565×359×890	1530×730×1060	1605×345×955
Net/Gross weight		kg	46.5/50.5	46.5/50.5	46.5/50.5	125/150	130/142

Notes:  
1. Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 7.5m with zero level difference.  
2. Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 7.5m with zero level difference.  
3. Sound pressure level is measured 1.4m below the unit in a semi-anechoic chamber.  
4. The dimension is only the body size, excluding the size of the installation lug, connecting copper pipe, etc.

Victorian Energy Upgrades (VEU) Program

The Victorian Energy Upgrades (VEU) program assists households and businesses to reduce their energy bills and greenhouse gas emissions by providing financial incentives to install energy efficient equipment and appliances.

Midea has a suite of high efficiency products to suit all upgrade categories which attract the highest incentives in each program. We are proudly introducing to our range the Mini VRF series, which thanks to our labs advanced technology, are more energy efficient systems that will be further reducing carbon emissions while increasing financial savings through the incentives to the Victorian community.

For more information on the program please visit following website  
VIC <https://www.esc.vic.gov.au/victorian-energy-upgrades/about-victorian-energy-upgrades-program>

VEU Climatic Region	Heating capacity(kW)	Cooling capacity(kW)	VEECs(res)**	
			2024*	2025*
For upgrades in Metropolitan Victoria-Climatic region mild	23	19.5	85	89
For upgrades in Metropolitan Victoria-Climatic region cold	23	19.5	93	98
For upgrades in Regional Victoria-Climatic region mild	23	19.5	85	89
For upgrades in Regional Victoria-Climatic region cold	23	19.5	93	98
For upgrades in Regional Victoria-Climatic region hot	23	19.5	49	51

\*All certificates have been calculated for the dates between the 1st February of that year to January 31 of the following year.  
\*Residential VEECS certificates have been submitted to the VEU and waiting for final approval.  
\*\*VEEC data was calculated base on activity scenatio 6 (VII )of activity 6 (23) -space heating and cooling-high efficiency air conditioner

Midea Building Technologies Division  
Midea Group

Add.: Midea Headquarters Building, 6 Midea Avenue, Shunde, Foshan, Guangdong, China  
Postal code: 528311  
mbt.midea.com    www.midea-group.com    tsp.midea.com  
Midea reserves the right to change the specifications of the product, and to withdraw or replace products without prior notification or public announcement. Midea is constantly developing and improving its products.

