

## Installation Instructions


1. Remove both seats.



2. Unfold Dust Guard, place over seating area & insert seat belt latches through holes.



3. Fasten velcro straps located on both upper right & left sides of Dust Guard to driver & passenger roll bar.

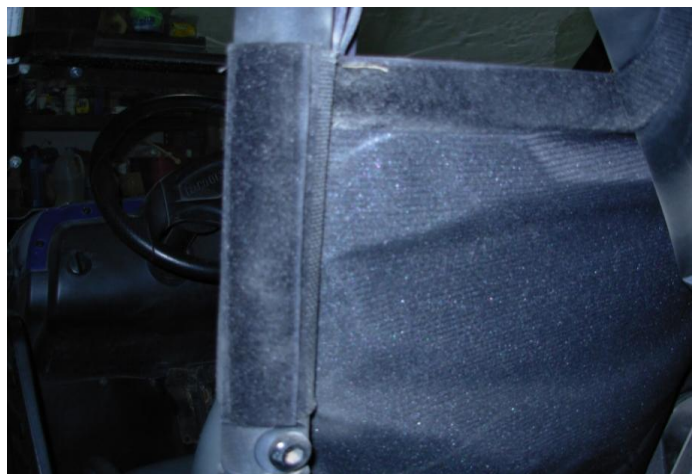



4. Tuck the bottom back of the Dust Guard behind the seat belt retractors and also behind the seat restraining bar on both seats. Now reinstall both seats.



5. Installing the Dust Cape.

\* First, twist the velcro strap on the Dust Guard on driver side roll bar, so the velcro on the strap faces the Rhino bed. Line up the velcro on the Dust Cape with the velcro on the roll bar and press together. Now line up the velcro on the top edge on the Dust Cape with the velcro on the top edge of the Dust Guard and press together all the way across till you reach the passenger side roll bar. Twist the velcro strap on roll bar till the velcro on the strap faces the Rhino bed. Line up the velcro on the Dust Cape with the velcro the roll bar and press together. Note: The Dust Cape goes between the cab & the bed.



6. Your finished. ENJOY!

