

606 OPEN RACKS



Standard

- Comply with ANSI/EIA RS-310-D、IEC60297-2
DIN41494;PART1; DIN41494;PART7

Material

- SPCC Cold Rolled Steel;
- Column: 1.5mm, others: 2.0mm

Colour


- 606 ■■■■ ■■ 0■■:RAL7035
- 606 ■■■■ ■■ 1■■:RAL9004

Loading Capacity

- Static loading: 150KG

RACK


606 OPEN RACKS

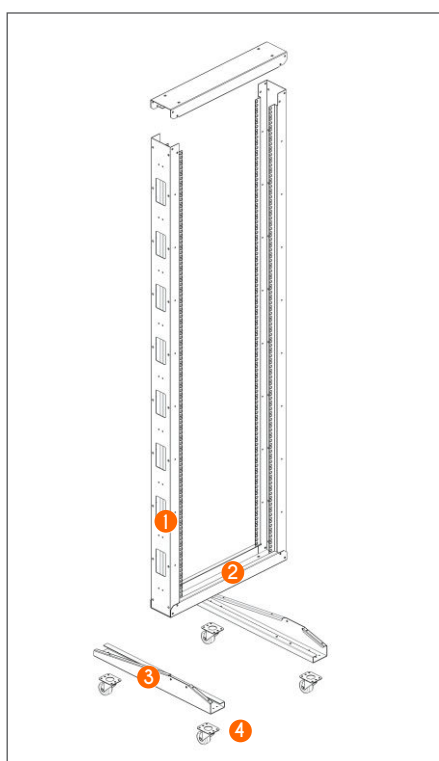

Feature

- Modular design, easily assemble and disassemble for delivery, low-cost.
- Various optional accessories according to requirements(cable management slot, removable working panel, etc.).


May Installs The Fitting



Double Sided Shelf



Cantilever shelf



Cable management

Main Part

S/N	Specification	Qty	Material	Surface Finish	Remark
1	Column	2	SPCC t1.5	Powder coated	----
2	Plinth	2	SPCC t2.0	Powder coated	----
3	Support Crossbeam	2	SPCC t2.0	Powder coated	----
4	2" heavy duty castor	4			----
A	M6 screw& nuts	20	Steel	Color zinc	40pcs for over 33U
B	Trox tooling	1	Steel	Black	----

Specification

Model No.	RU	Width (mm)	Depth(D)(mm)	Height(H)(mm)	Volume (CBM)
606.6629.00.■00	29	600	600	1422	1420*260*140
606.6633.00.■00	33	600	600	1600	1600*260*140
606.6638.00.■00	38	600	600	1822	1820*260*140
606.6642.00.■00	42	600	600	2000	2000*260*140
606.6647.00.■00	47	600	600	2222	2220*260*140