TECHNICA

60X120CM

High Strength Digital Floor Tiles

Kajaria

ALPINE GRIS

ALBANIA MARFIL

ATHENA MARFIL

ATHENS CARAMEL

BASEL MARFIL

BASEL BROWN

BAVERIAN MARFIL

CORFU GRIS

STRANGE
WINDS
AUTHOR
LASTNAME

CORFU MIST

EVEREST BIANCA

ESTONIA AZUL

FOG AZUL

FOG BROWN

FOG CREMA

FOG SILVER

FLIMS GRIS

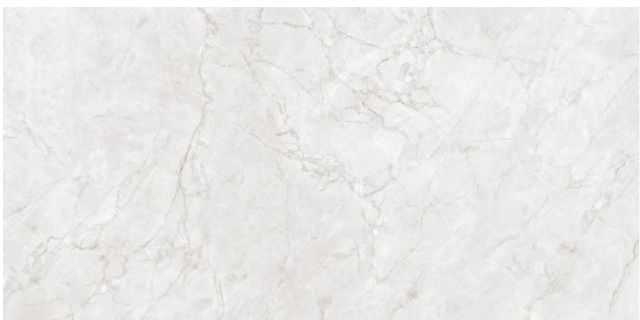

IVANO SILVER R

LAAX MARFIL

LEXI MIST

MESSINA CREMA

MELLOW GRIS

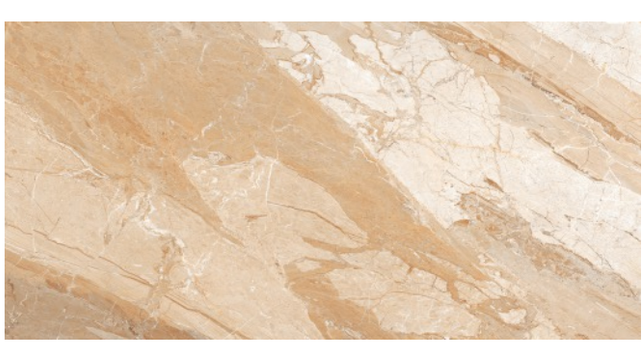

MIKONOS BEIGE

MELLOW MIST

NORTHERN LIGHT

LIONI ALMOND

LIONI CREMA

SANDY CREMA

SERBIA MARFIL

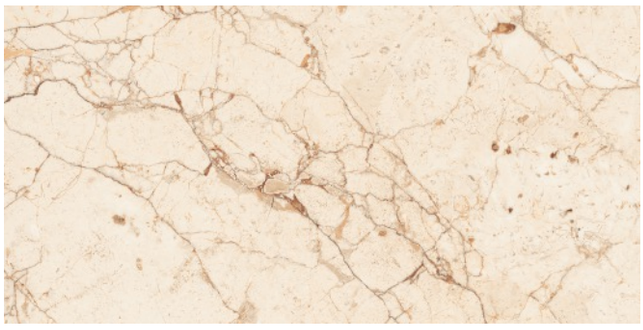

SICILIA MARFIL

TIRANA ASH

TITLIS BIANCA

CHANEL
Bauhaus

PARCO BROWN R

PARCO GRIS R

PARCO MARFIL R

PARCO MIST R

SPECIFICATIONS

Work size		Coverage area/box (m^2)	No. of tiles/box	Avg. Wt./box	Avg. Wt/sq.mtr.
Dimensions (in mm)	Thickness (in mm)				
600x1200	8.50	1.44	2 Pcs	27.50	19.09

Comparison of Kajaria Tiles Parameters to International Standards BIb ISO-13006:2018-09					
Sr.No.	Characteristics	Group BIb-ISO 13006:2018-09 Nominal Size (N) N ≥ 15cm Whichever less is applicable		Our Value	Method of Testing
		%	mm		
1	Deviation in Length & Width	± 0.3	± 1.0	± 1.0	ISO-10545-2
2	Deviation in Thickness	± 5.0	± 0.5	± 0.5	ISO-10545-2
3	Deviation in Straightness of Sides	± 0.3	± 0.8	± 0.8	ISO-10545-2
4	Deviation in Rectangularity	± 0.3	± 1.5	± 1.5	ISO-10545-2
5	Surface Flatness				
	a. Centre Curvature (max.)	± 0.4	± 1.8	± 1.8 mm	ISO-10545-2
	b. Edge Curvature (max.)	± 0.4	± 1.8	± 1.8 mm	ISO-10545-2
	c. Corner Warpage (max.)	± 0.4	± 1.8	± 1.8 mm	ISO-10545-2
6	Surface Quality	A min. 95% of the tiles are to be free from visible defects		A min. 95% of the tiles are to be free from visible defects	ISO-10545-2
7	Water Absorption	0.5% < Eb ≤ 3.0% Ind. Max. 3.3%		2.0 - 3.0 %	ISO-10545-3
8	Abrasion Resistance	Report abrasion class		PEI class 3 min.	ISO-10545-7
9	Modulus of Rupture N/mm2	Min. 30, Individual min. 27		Min. 30, Individual min. 27	ISO-10545-4
10	Breaking Strength (in Newtons)	a. Thickness ≥ 7.5 mm, not less than 1100 b. Thickness < 7.5 mm, not less than 700		"Thickness ≥ 7.5 mm, not less than 1100"	ISO-10545-4
11	Crazing Resistance	Required		4 cycle at 7.5 bar min.	ISO-10545-11
12	Resistance to Staining	Min. class 3		Min. class 3	ISO-10545-14
13	Resistance to Chemical	Test method available		Resistant to specified chemicals	ISO-10545-13
14	Moisture Expansion in millimetres per metre	Test method available		Negligible	ISO-10545-10
15	Thermal Shock Resistance	Test method available		No damage	ISO-10545-9

- Colours in the catalogue are as accurate as printing process allows. please check actual tile sample before making the final selections.
- Sizes mentioned in the catalogue are nominal sizes only.
- No claim will be entertained once the tiles are fixed.
- For better laying, please follow the instructions on the packaging box.
- Please make sure to check the shade/finish with the sales agent/ dealer before making the final purchase because there might be variation in actual finish that shown in the catalogue. The company will not bear any loss in such case.

Kajaria

INDIA'S NO. 1 TILE COMPANY

Kajaria

INDIA'S NO. 1 TILE COMPANY

Kajaria Ceramics Limited

Corporate Office: J1/B1 (Extn.), Mohan Co - op Industrial Estate, Mathura Road, New Delhi - 110044, Ph.: 011-26946409

Regd Office: SF-11, Second Floor, JMD Regent Plaza, Mehrauli Gurgaon Road, Village Sikanderpur Ghosi, Gurgaon-122001, Haryana, Ph.:0124-4081281

CIN No. : L26924HR1985PLC056150, E-mail: info@kajariaceramics.com, Web.: www.kajariaceramics.com

facebook.com/KajariaCeramicsLimited twitter.com/KajariaCeramic instagram.com/kajaria.ceramics, Tollfree : 1800-309-309

Download Kajaria App