

INTIDAYA
HYDROCHEM SERVICE

PT. INTIDAYA HYDROCHEM SERVICE

Komplek Ruko Duri Kosambi Baru Blok A Ext 1 No. 38,
RT.10/RW.13, Duri Kosambi, Cengkareng, Jakarta Barat,
DKI Jakarta 11750

Email : marketing@intidaya.net

Telpon : +62 821 553 551 98

INTIDAYA KATALOG PRODUK




DAFTAR ISI

1. Daftar Isi	02
2. Tentang Kami	03
3. Mitra Kami	04
4. Produk Kami	05
4.1. Hydraulic & Pneumatic	06
4.2. Lubricant	09
4.3. Chemical Solution	11
5. Automatic Lubrication	12
6. Hubungi Kami	13



TENTANG KAMI

Intidaya Hydrochem Service bergerak sebagai perusahaan supplier umum untuk produk Hydraulic, Pneumatic, Lubricant dan Chemical Solution bagi berbagai industri yang membutuhkan. Kami bekerja sama dengan berbagai mitra yang sudah ahli di bidangnya.

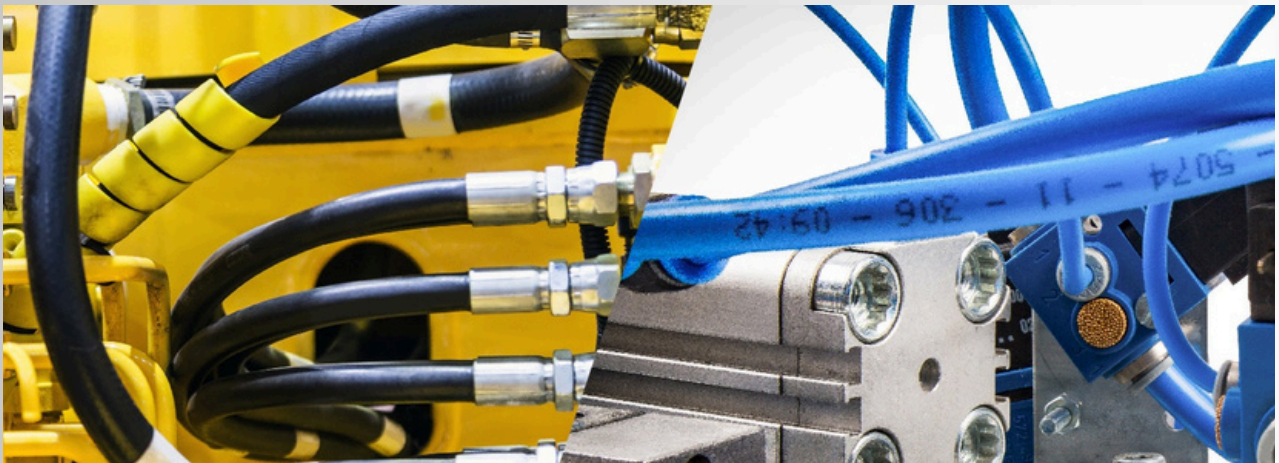

MITRA KAMI

rexroth

A Bosch Company

FESTO

ExxonMobil



PRODUCT KAMI


HYDRAULIC & PNEUMATIC

Kami menyediakan berbagai macam suku cadang untuk produk Hydraulic dan Pneumatic dengan kualitas yang terjamin dan harga yang kompetitif.



LUBRICANT

Kami menyediakan berbagai macam pelumas untuk kebutuhan industrial dan transmisi, mulai dari grease sampai dengan oli.

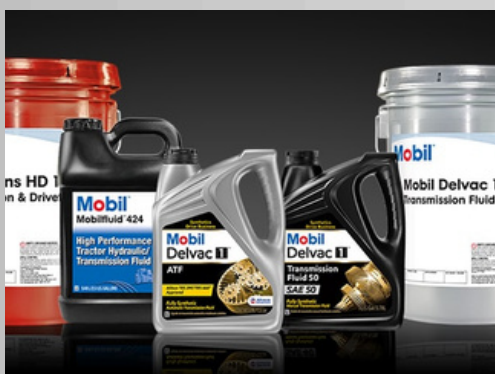

CHEMICAL SOLUTION

Kami menyediakan berbagai macam solusi kimia untuk kebutuhan perawatan cooling tower, boiler dan mesin.



HYDRAULIC & PNEUMATIC



PUMP



VALVE

Product	Type	Series
Pump	Axial Variabel Piston Pump	A10VSO 28 ~ 140, Series 31 A4VG 28 ~ 500, Series 32 A2FO 18 ~ 1000, Series 6X
Pump	Vane Pump	PVV Pump , 35VQ , V10 , V20
Pump	Gear Pump Single & Tandem	AZPF 004 ~ 028 , GD5 Series , P30, P50
Pump	Motor Hydraulic	OMP 315 , OMV 500
Valve	Servo Valve	D660 , G631
Valve	Proportional Valve	4WEH 10 ~ 32 Series, R4R03
Valve	Directional Solenoid Valve	4WE6X , 4WE10, DBW, ZDR

HYDRAULIC & PNEUMATIC



CYLINDER



COOLER

Product	Type	Series
Cylinder	Hydraulic Cylinder Single Acting and Double Acting	Tie Rod and Welded
Cylinder	Pneumatic Cylinder	Compact, Short Stroke, Flat Cylinders
Cooler	Plate Water Oil Cooler Parker	B5T ~ B120T

HYDRAULIC & PNEUMATIC



ACCUMULATOR



**BLADDER
ACCUMULATOR**



FILTRATION



FILTER ELEMENT
OIL FILTER
WATER FILTER



SOLENOID VALVE



CYLINDER

LUBRICANT - INDUSTRIAL



Product	Type	Series
Grease	Mobilgrease XHP Series	XHP 5, 220, 221, 222, 222 special, 223
Grease	Mobilgrease XHP 460 Series	XHP 461, 462, 462 MOLY
Grease	Mobilith SHC Series	SHC 007, 100, 1000 special, 1500, 220, 221, 460
Grease	Mobilux EP Series	EP 0, 1, 2, 3, 004, 023
Grease	Unirex N Series	N2 dan N3
Grease	Polyrex EM	-
Oil	Mobilgear 600 XP Series	68 ~ 680
Oil	Mobil DTE Named Series	-
Oil	Mobil SHC Cibus Series	32 ~ 680

LUBRICANT - TRANSMISI



Product Series
Mobil Delvac 1™ ATF
Mobil Delvac 1™ 5W-40
Mobil Delvac Modern™ 15W-40 Super Defense
Mobil Delvac Legend™ 15W-40 Standard Defense
Mobilube™ HD 80W-90
Mobiltrans™ HD 30


CHEMICAL SOLUTION



COOLING TOWER



BOILER

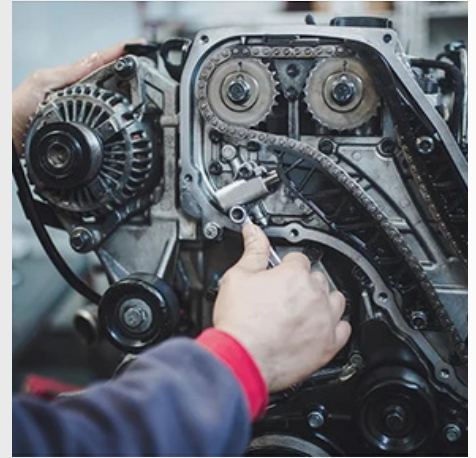

ENGINEERING & MAINTENANCE

Type	Product
Cooling Tower	MAEX-C CTT+ A1137 MAEX-C Anti Microbial 35KS A1139
Boiler	MAEX-C BW Treat AB1203
Engineering & Maintenance	Scale Remover Rust Remover Electric Expert Solv HD Cleaner Foam Safe+ NF Cleaner Solv Clean

INTIDAYA MONO-POINT LUBRICATOR

Mono-Point Elektrik adalah pelumas otomatis yang sederhana dan andal untuk aplikasi dengan suhu bervariasi atau instalasi jarak jauh seperti getaran, ruang terbatas, atau lingkungan berbahaya.



Technical Information	Result
Model	IMPL00 - 125 ml IMPL00 - 250 ml
Dimension	125 ml (diameter 82mm height 178mm) 250 ml (diameter 82mm height 225mm)
Temperatur Range	- 20°C to + 60°C
Application Oil	Up to ISO VG 320 (320 cSt)
Application Grease	Up to NLGI 2
Working Pressure	12 bar (175 psi)
Repeated filling time	Up to 10 times
Power Supply	4.5V lithium battery pack / 24V external power supply
Lubrication Cycle	15 days, 1, 3, 6, 9, 12 months
Protection Grade	IP 65
Longest Lubrication	3 Meter (300 cm)
Interface Thread	R 1/2

Kecepatan injeksi oli dan gemuk tidak terpengaruh oleh suhu. Tekanan pelumasan maksimum 12 bar selama seluruh periode pengeluaran dengan kemungkinan pengaturan berbagai siklus pelumasan.

Tangki oli transparan, Anda dapat memeriksa sisa kapasitas secara real-time dengan LED merah-kuning-biru. Indikator menunjukkan status pelumas. Catu daya eksternal dapat dihubungkan dengan daya start-stop peralatan. Cocok untuk pemasangan langsung dan jarak jauh.



PT. INTIDAYA HYDROCHEM SERVICE

INTIDAYA
HYDROCHEM SERVICE

HUBUNGI KAMI



+62 821 553 551 98



marketing@intidaya.net



www.intidaya.net



Komplek Ruko Duri Kosambi Baru Blok A Ext 1 No. 38,
RT.10/RW.13, Duri Kosambi, Cengkareng, Jakarta Barat,
DKI Jakarta 11750

