



DIAMOND TOOTH

W2SP

Material: Peek
 Maximum Size:
 400mm Heightx300mm o.d
 Minimum Size:
 5mm Heightx10mm o.d
 PH: 0(consultfactory)-14
 Temperature: -40c/+400c



DIAMOND TOOTH

W2SC

Material: Carbon fiberPetg
 Maximum Size:
 400mm Heightx300mm o.d
 Minimum Size:
 5mm Heightx10mm o.d
 PH: 0(consultfactory)-11
 Temperature: -260c/+260c




W2SO -1Piece/Split/Flexible


Material: 100% PTF
 Maximum Size:
 380mm Heightx380mm o.d
 Minimum Size:
 15mm Heightx10mm o.d
 PH: 0-14
 Temperature: -73c/+260c

HOW CAN THE WAY-2-SEAL SOLVE YOUR SEALING PROBLEMS


- » Cooling benefits reduce friction and wear
- » Excellent for slurry pump applications
- » Extremely simple installation
- » Able to withstand temperatures up to 260°C / 400°C
- » Resistant to the most abrasive media
- » Greatly reduces friction and amperage draw
- » Can be run flush in non-abrasive medias

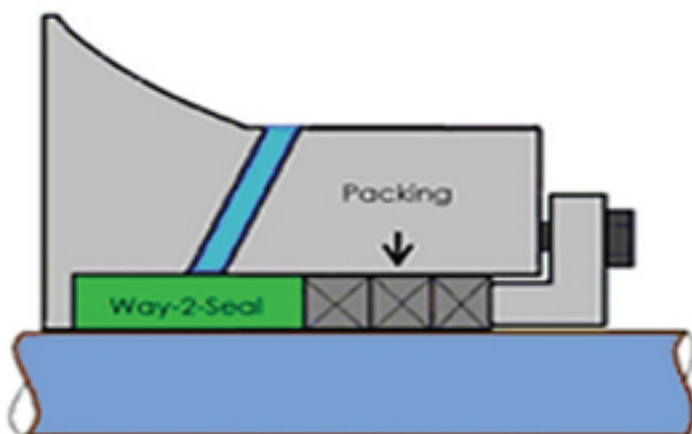

Typical Slurry pump Arrangement

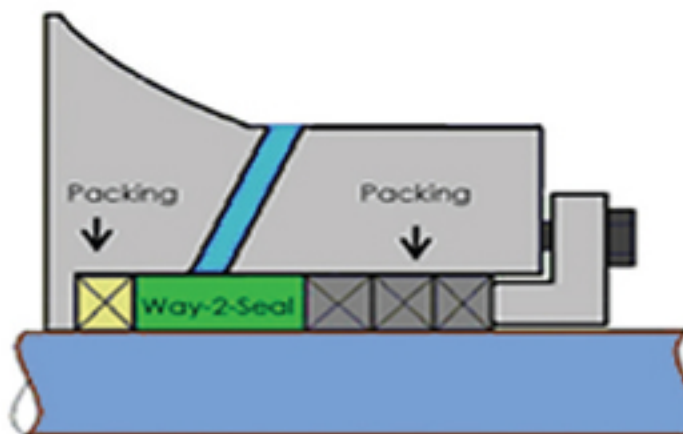

Optional Slurry pump Arrangement

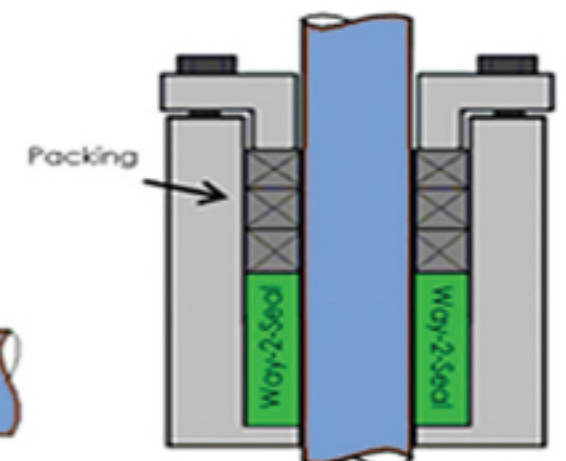

Valve Arrangement

**WE
 MANUFACTURE
 PEEK PARTS**



SeSi Innovations specializes in rapid, high-precision custom PEEK parts. We provide fast turnaround times, ensuring our clients receive durable, high-quality components for applications in all industrial areas.

FOR PRICING INFORMATION CONTACT

website: www.sesivate.us
 +1 (985) 791-6223
 email: info@sesivate.us