


RED DUCT HOSE



Red Duct Hose

The Red Duct Hose is a flexible and durable ventilation duct designed for efficient air movement and exhaust applications. Made from high-quality coated fabric with spiral reinforcement, it offers excellent resistance to heat, abrasion, and wear.

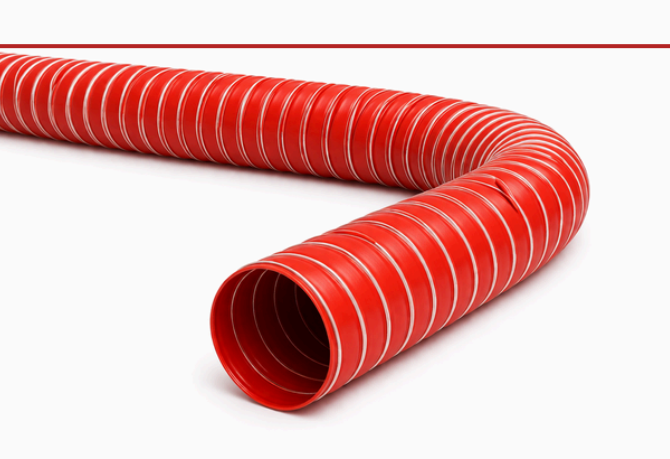






Its lightweight and highly flexible design allows easy installation in tight spaces, while maintaining strong structural performance. Ideal for HVAC systems, industrial ventilation, and dust extraction applications.



Red Duct Hose

Wall	Silicone Coated Glass Fiber Fabric
Reinforcement	Glass Fiber Cord Delivery
Spiral	Spring Steel Wire
Variants	Wireless Sleeves
Temp Range	-70°C to + 260°C Short time to +280°C
Features	<ul style="list-style-type: none">• Double-layer of Silicone Coated Glass Fiber Fabric• Extremely Good Heat Resistance• Leakproof• Smooth Interior• Highly Flexible• Small Bending Radius• Kink-proof
Application	Suction Hose, Especially Suitable: <ul style="list-style-type: none">• For Transmission Hot Air, Chemical Fumes and Industrial Fumes• For Printing Machines, Blowers• For Exhausting Gas, Engine Construction, Engine Warming, Aircraft Construction and Military Construction

TECHNICAL DATA

 ID	 OD	 WT	 BR	 WP	 VACUUM	 L
<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>bar</i>	<i>bar</i>	<i>m</i>
25	29	0.4	43	2.7	0.70	4
32	36	0.4	54	2.7	0.64	4
38	43	0.4	64	2.6	0.60	4
51	56	0.4	84	2.5	0.51	4
63	68	0.4	102	2.3	0.46	4
76	81	0.4	121	2.1	0.42	4
83	88	0.4	132	2.0	0.40	4
89	94	0.4	141	2.0	0.38	4
102	107	0.4	160	1.9	0.35	4
114	120	0.4	180	1.6	0.29	4
127	133	0.4	199	1.5	0.26	4
152	158	0.4	237	1.3	0.18	4
165	172	0.4	258	1.2	0.15	4
178	184	0.4	276	1.0	0.13	4
203	209	0.4	313	0.8	0.10	4
254	260	0.4	390	0.6	0.08	4
305	311	0.4	466	0.5	0.07	4