


# Ultra V Pro

HALF-CELL N-TYPE TOPCon

BIFACIAL DOUBLE-GLASS MODULE

TYPE: STPXXXS-I54-Nsh+

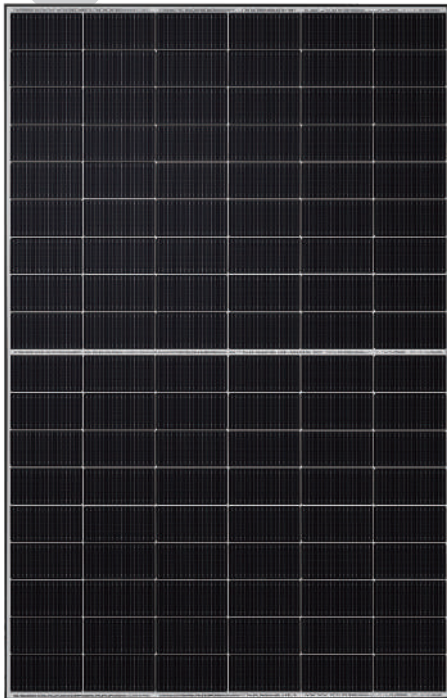

**435-455W** **22.8%**  
POWER OUTPUT MAX EFFICIENCY



## High module conversion efficiency

Module efficiency up to **22.8%** achieved through advanced cell technology and manufacturing process



## Multi busbar technology

Superior optical utilization and current collection capability, effectively improving product power and reliability



## Excellent low light performance

More power output in low light conditions such as cloudy days, mornings and evenings



## Superior load-bearing capability

Module certified to withstand **5400 Pa** front side max static test load and **2400 Pa** rear side max static test load \*




**Tier1**  
Bloomberg  
NEW ENERGY FINANCE

ISO 14001 Environment Management System  
ISO 45001 Occupational Health and Safety  
ISO 9001 Quality Management System  
SA 8000 Social Responsibility Standards  
IEC TS 62941 Guideline for Module Design

IEC 61701 Salt-mist certification  
IEC 62716 Ammonia certification  
IEC 60068-2-68 Dust and Sand  
IEC 61730-2 (UL790) Fire class C



**30** years of linear warranty  
**25** years of product warranty

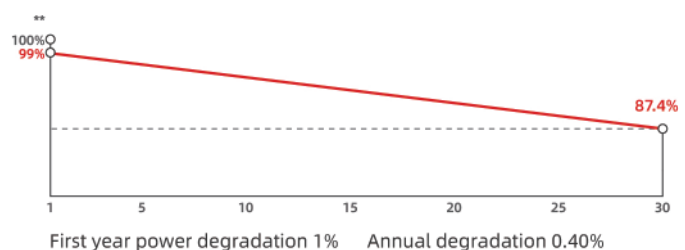

\* Please refer to Suntech Standard Module Installation Manual for details.

\*\*\* WEEE only for EU market.


\*\* Please refer to Suntech Limited Warranty for details.

\*\*\*\* Suntech reserves the right to the final.

# Ultra V Pro STPXXXS-I54-Nsh+ 435-455W

## Mechanical Characteristics

|                              |                                                                                        |
|------------------------------|----------------------------------------------------------------------------------------|
| Solar Cell                   | N-type Monocrystalline silicon                                                         |
| No. of Cells                 | 108 (6 × 18)                                                                           |
| Dimensions                   | 1762 × 1134 × 30 mm (69.37 × 44.6 × 1.2 inches)                                        |
| Weight                       | 24.5 kg (54.01 lb.)                                                                    |
| Front/Back Glass             | 2.0+2.0 mm (0.079+0.079inches)<br>semi-tempered glass                                  |
| Output Cables                | 4.0 mm <sup>2</sup> ,<br>(-) 1400 mm and (+) 1400 mm in length<br>or customized length |
| Junction Box                 | IP68 rated (3 bypass diodes)                                                           |
| Operating Module Temperature | -40°C- +70°C                                                                           |
| Maximum System Voltage       | 1500 V DC (IEC)                                                                        |
| Connectors                   | STP-XC4(Standard)/MC4 EVO2(Optional)                                                   |
| Maximum Series Fuse Rating   | 30 A                                                                                   |
| Power Tolerance              | 0/+5 W                                                                                 |
| Refer. Bifaciality Factor    | (80 ± 5)%                                                                              |
| Frame                        | Anodized aluminum alloy frame                                                          |
| Packing Configuration        | 36 pieces per pallet<br>936 pieces per container /40'HC<br>928 kg per pallet           |

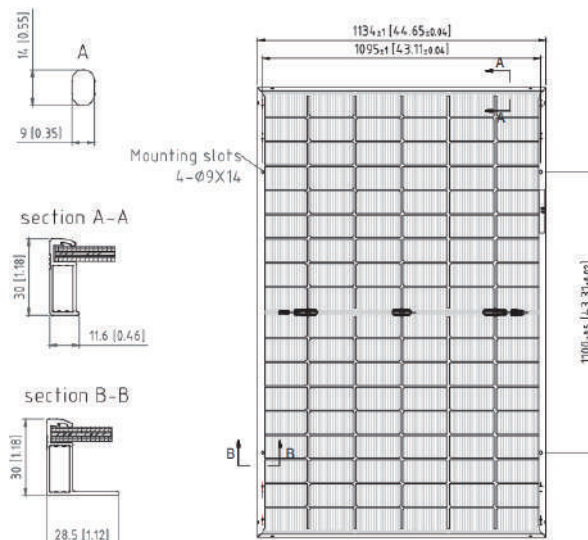

For tracker installation, please turn to Suntech for mechanical load information.

## Electrical Characteristics (STC)

| Module Type                                    | STP455S-I54-Nsh+ | STP450S-I54-Nsh+ | STP445S-I54-Nsh+ | STP440S-I54-Nsh+ | STP435S-I54-Nsh+ |
|------------------------------------------------|------------------|------------------|------------------|------------------|------------------|
| Maximum Power (P <sub>max</sub> /W)            | 455              | 450              | 445              | 440              | 435              |
| Optimum Operating Voltage (V <sub>mp</sub> /V) | 33.07            | 32.89            | 32.71            | 32.53            | 32.35            |
| Optimum Operating Current (I <sub>mp</sub> /A) | 13.76            | 13.67            | 13.61            | 13.53            | 13.45            |
| Open Circuit Voltage (V <sub>oc</sub> /V)      | 39.57            | 39.39            | 39.19            | 39.00            | 38.80            |
| Short Circuit Current (I <sub>sc</sub> /A)     | 14.52            | 14.44            | 14.36            | 14.28            | 14.20            |
| Module Efficiency (%)                          | 22.8             | 22.5             | 22.3             | 22.0             | 21.8             |

STC: Irradiance 1000 W/m<sup>2</sup>, module temperature 25 °C, AM=1.5; Measuring tolerance is within +/- 3%;

## Electrical Characteristics (BNPI)

| Module Type                                    | STP455S-I54-Nsh+ | STP450S-I54-Nsh+ | STP445S-I54-Nsh+ | STP440S-I54-Nsh+ | STP435S-I54-Nsh+ |
|------------------------------------------------|------------------|------------------|------------------|------------------|------------------|
| Maximum Power (P <sub>max</sub> /W)            | 501              | 495              | 490              | 485              | 479              |
| Optimum Operating Voltage (V <sub>mp</sub> /V) | 33.07            | 32.89            | 32.71            | 32.53            | 32.35            |
| Optimum Operating Current (I <sub>mp</sub> /A) | 15.15            | 15.05            | 14.99            | 14.90            | 14.81            |
| Open Circuit Voltage (V <sub>oc</sub> /V)      | 39.57            | 39.39            | 39.19            | 39.00            | 38.84            |
| Short Circuit Current (I <sub>sc</sub> /A)     | 15.99            | 15.90            | 15.81            | 15.73            | 15.64            |

BNPI: Irradiance front 1000 W/m<sup>2</sup>, rear 135 W/m<sup>2</sup>, module temperature 25 °C, AM=1.5;

## Temperature Characteristics

|                                             |           |
|---------------------------------------------|-----------|
| Temperature Coefficient of P <sub>max</sub> | -0.29%/°C |
| Temperature Coefficient of V <sub>oc</sub>  | -0.24%/°C |
| Temperature Coefficient of I <sub>sc</sub>  | 0.043%/°C |

Information on how to install and operate this product is available in the installation instruction. All values indicated in this data sheet are subject to change without prior announcement. The specifications may vary slightly. All specifications are in accordance with standard EN 50380. Color differences of the modules relative to the figures as well as discolorations of/in the modules which do not impair their proper functioning are possible and do not constitute a deviation from the specification.

## Graphs Current-Voltage & Power-Voltage (450W)

