

## SW-WDA-K2

K & Ka band dual channel & dual circular polarized probe antenna

### Applications

- 1-Satellite communications
- 2-Radar applications
- 3-5G systems
- 4-Communication systems



### General description

Open-ended waveguide is a broadband antenna equipped with a diplexer, operating in the frequency ranges of 17.5 GHz to 20 GHz and 26.5 GHz to 30 GHz. Combined diplexer and antenna supports both the K and Ka bands, commonly used for satellite communications. It is capable of transmitting and receiving in both left-hand circular polarization (LHCP) and right-hand circular polarization (RHCP) across both bands, offering high port isolation, low VSWR, and minimal insertion loss. The antenna gain is 7 dBi for the K band and 10 dBi for the Ka band. This horn antenna provides typical isolation of 45 dB between the K and Ka band ports. The antenna ports are compatible with WR28 and WR42 waveguides. Port 1 & 2 are used to excite RHCP and Port 3


### Electrical Specifications

Frequency Range: 17.5 -20 GHz & 26.5- 29.5 GHz  
Polarization: Circular RHCP and LHCP  
Return loss:  $\leq 15$  dB  
Gain: 9 to 10 dBi  
Connector: waveguide WR42&WR28  
Tx and Rx isolation : 45dB  
Insertion loss: 1dB Lowband 2dB highband  
Axial Ratio (dB) : Min 1.05dB & Max 1.2dB


### Mechanical Specifications

Material : Aluminium  
Finish: Alodine  
Weight : 1.84 lb (835 g)  
Dimensions: 252 mm  $\times$  50 mm  $\times$  25 mm


## Maximum antenna gain vs Frequency

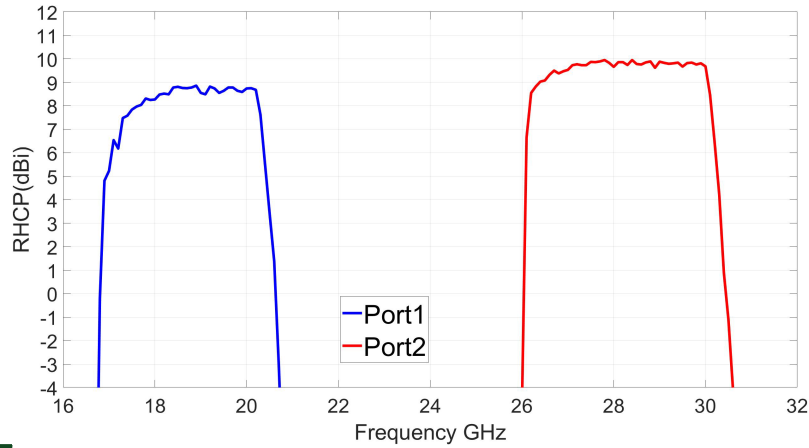





## AR vs Frequency

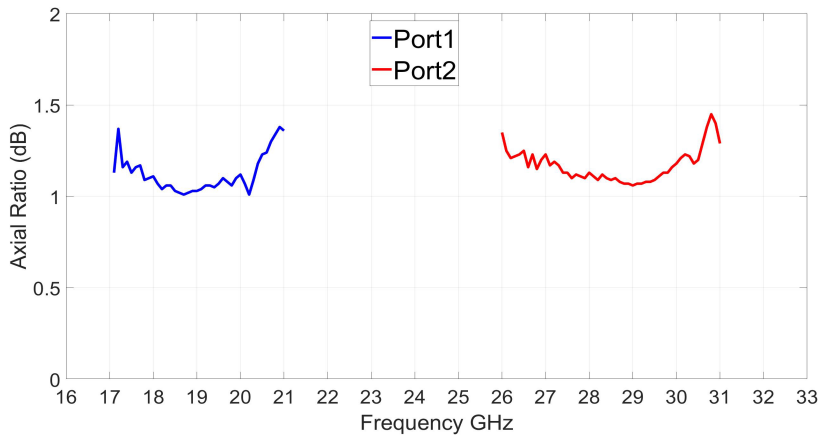

## Return loss vs Frequency

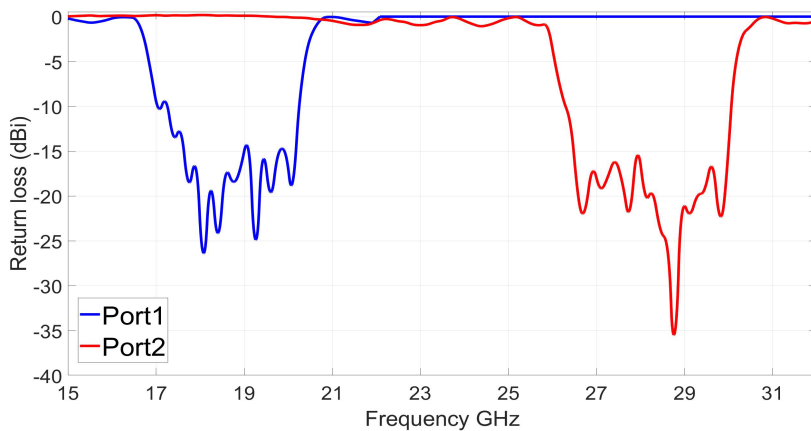

## Antenna Radiation measured pattern in the whole frequency range

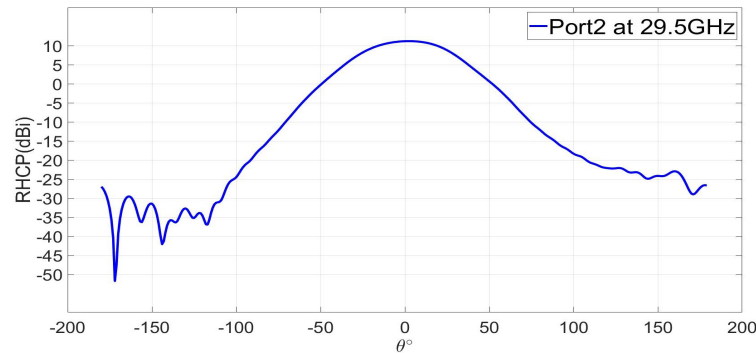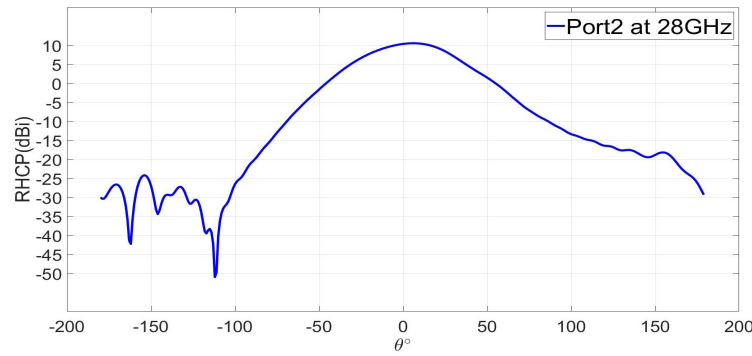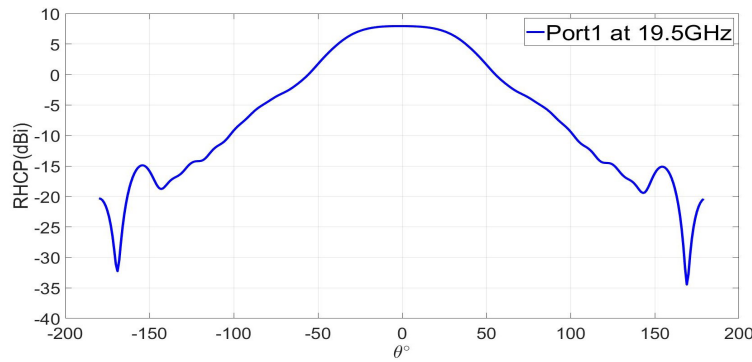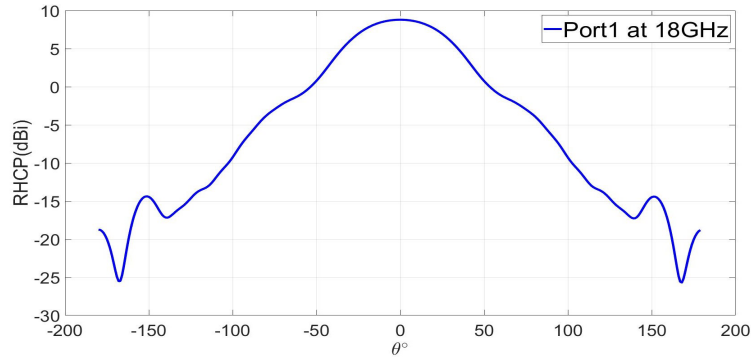

## Mechanical Outline

