

SW-WDA-K2

K & Ka band dual channel & dual circular polarized probe antenna

Applications

- 1-Antenna measurements
- 2-Antenna calibrations
- 3-5G systems
- 4-Communication systems



General description

Open-ended waveguide is a broadband antenna equipped with a diplexer, operating in the frequency ranges of 17.5 GHz to 20 GHz and 26.5 GHz to 30 GHz. Combined diplexer and antenna supports both the K and Ka bands, commonly used for antenna measurements. It is capable of transmitting and receiving in both left-hand circular polarization (LHCP) and right-hand circular polarization (RHCP) across both bands, offering high port isolation, low VSWR, and minimal insertion loss. The antenna gain is 7 dBi for the K band and 10 dBi for the Ka band. This horn antenna provides typical isolation of 45 dB between the K and Ka band ports. The antenna ports are compatible with WR28 and WR42 waveguides. Port 1 & 2 are used to excite RHCP and Port 3 & 4 excites LHCP.


Electrical Specifications

Frequency Range: 17.5 -20 GHz & 26.5- 29.5 GHz
Polarization: Circular RHCP and LHCP
Return loss: ≤ 15 dB
Gain: 9 to 10 dBi
Connector: waveguide WR42&WR28
Tx and Rx isolation : 45dB
Insertion loss: 1dB Lowband 2dB highband
Axial Ratio (dB) : Min 1.05dB & Max 1.2dB


Mechanical Specifications

Material : Aluminium
Finish: Alodine
Weight : 1.84 lb (835 g)
Dimensions: 252 mm $\times$ 50 mm $\times$ 25 mm


Maximum antenna gain vs Frequency

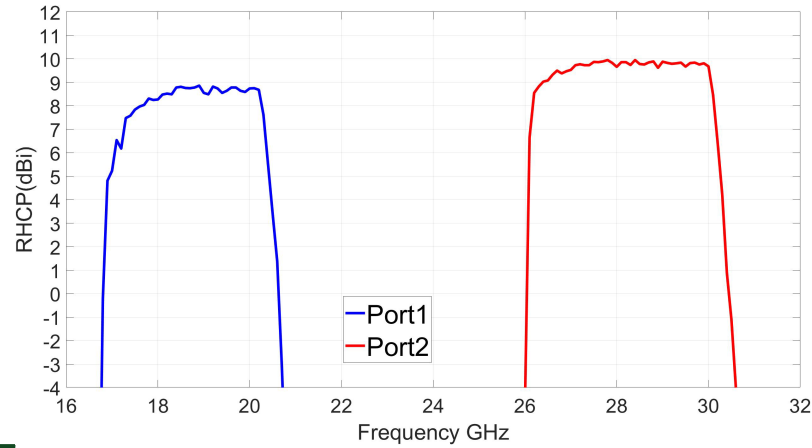





AR vs Frequency

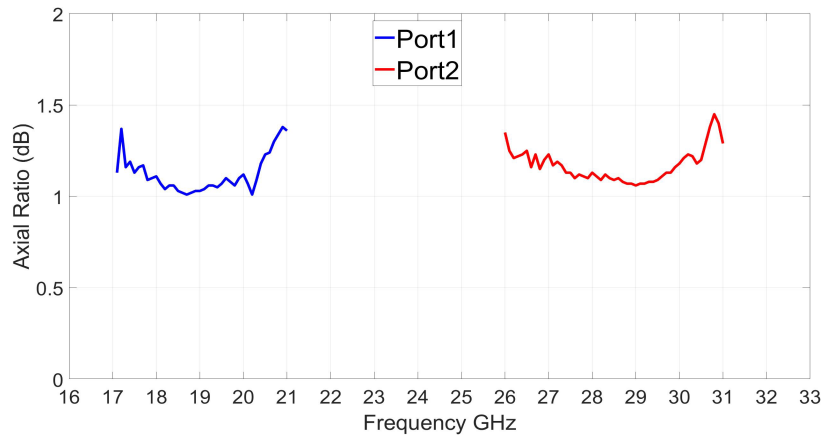

Return loss vs Frequency

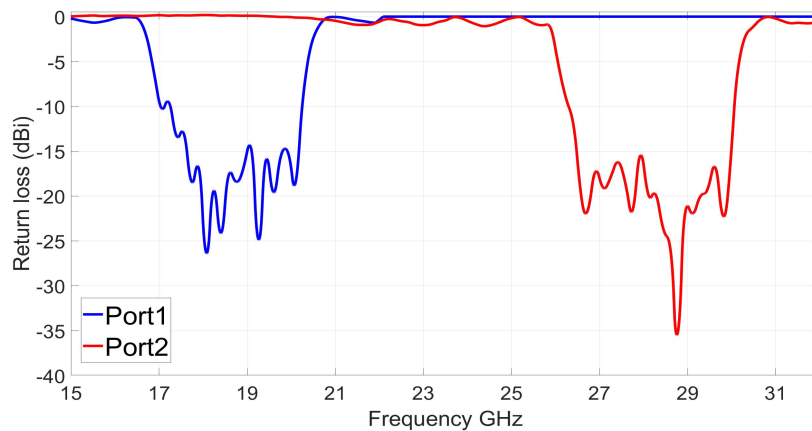

Antenna Radiation measured pattern in the whole frequency range

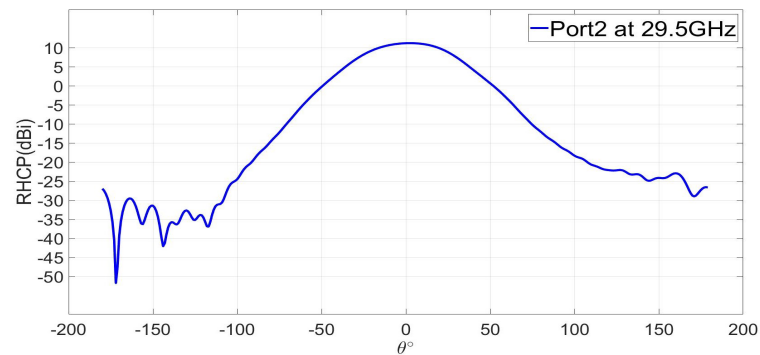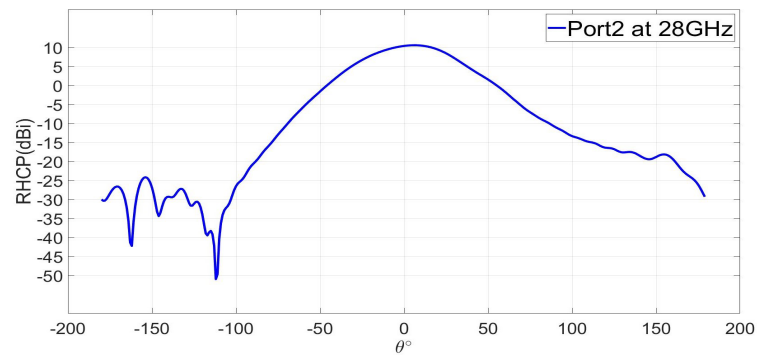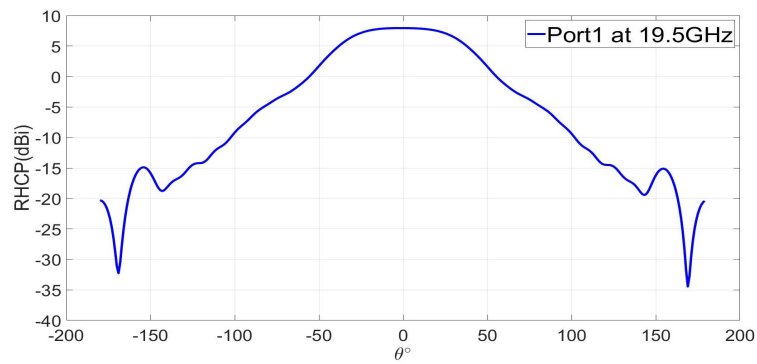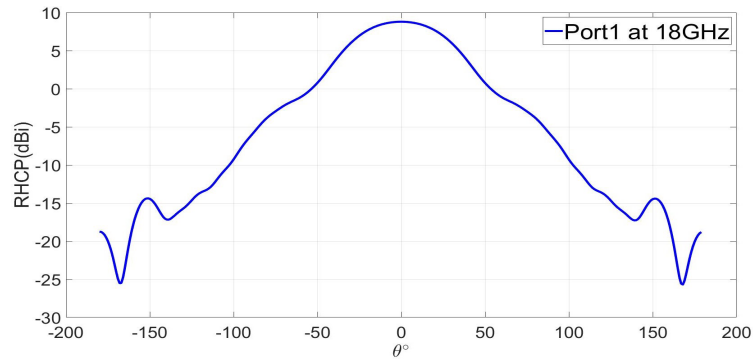

Mechanical Outline

