



Interior Faux Leather



— Linen Look

Designed to meet various aesthetic preferences with greater design versatility in textures, patterns, and finishes

EARTH

Fabric look synthetic leather



EARTH

Color Ranges



Pearl



Sand



Khaki



Pink Salt



Sea Blue



Light Sapphire



Willow Green



Ash



Graphite

mi.

fabric look synthetic leather

Parameters	Specification	Standard
Thickness	1.10 - 1.20 MM	ASTM D751-06
Width	min. 1370 MM	ASTM D751-06
Weight	580 - 640 gsm	ASTM D751-06
Bond Strength	min. 1.5 kgf/2 cm	ASTM D751-07
Breaking Strength		
Warp	min. 80 kgf/2 cm	ASTM D751-06
Weft	min. 40 kgf/2 cm	ASTM D751-06
Tear Strength		
Warp	min. 3 kg	ASTM D2261-02
Weft	min. 3 kg	ASTM D2261-02
Stretch (at 12Kg)		
Warp	10 – 40 %	ASTM D2261-02
Weft	100 – 200 %	ASTM D2261-02
Wear Test (800 Cycles)	No Excessive Loss Of Grain or Discoloration	ASTM D4157-02

Product Specification

CLASSIC

Interior upholstery



CLASSIC

Color Ranges



Clamps



Sand



River Stone



Moon



Pumpkin



Soil



Cacao




Dark Cherry



Charcoal



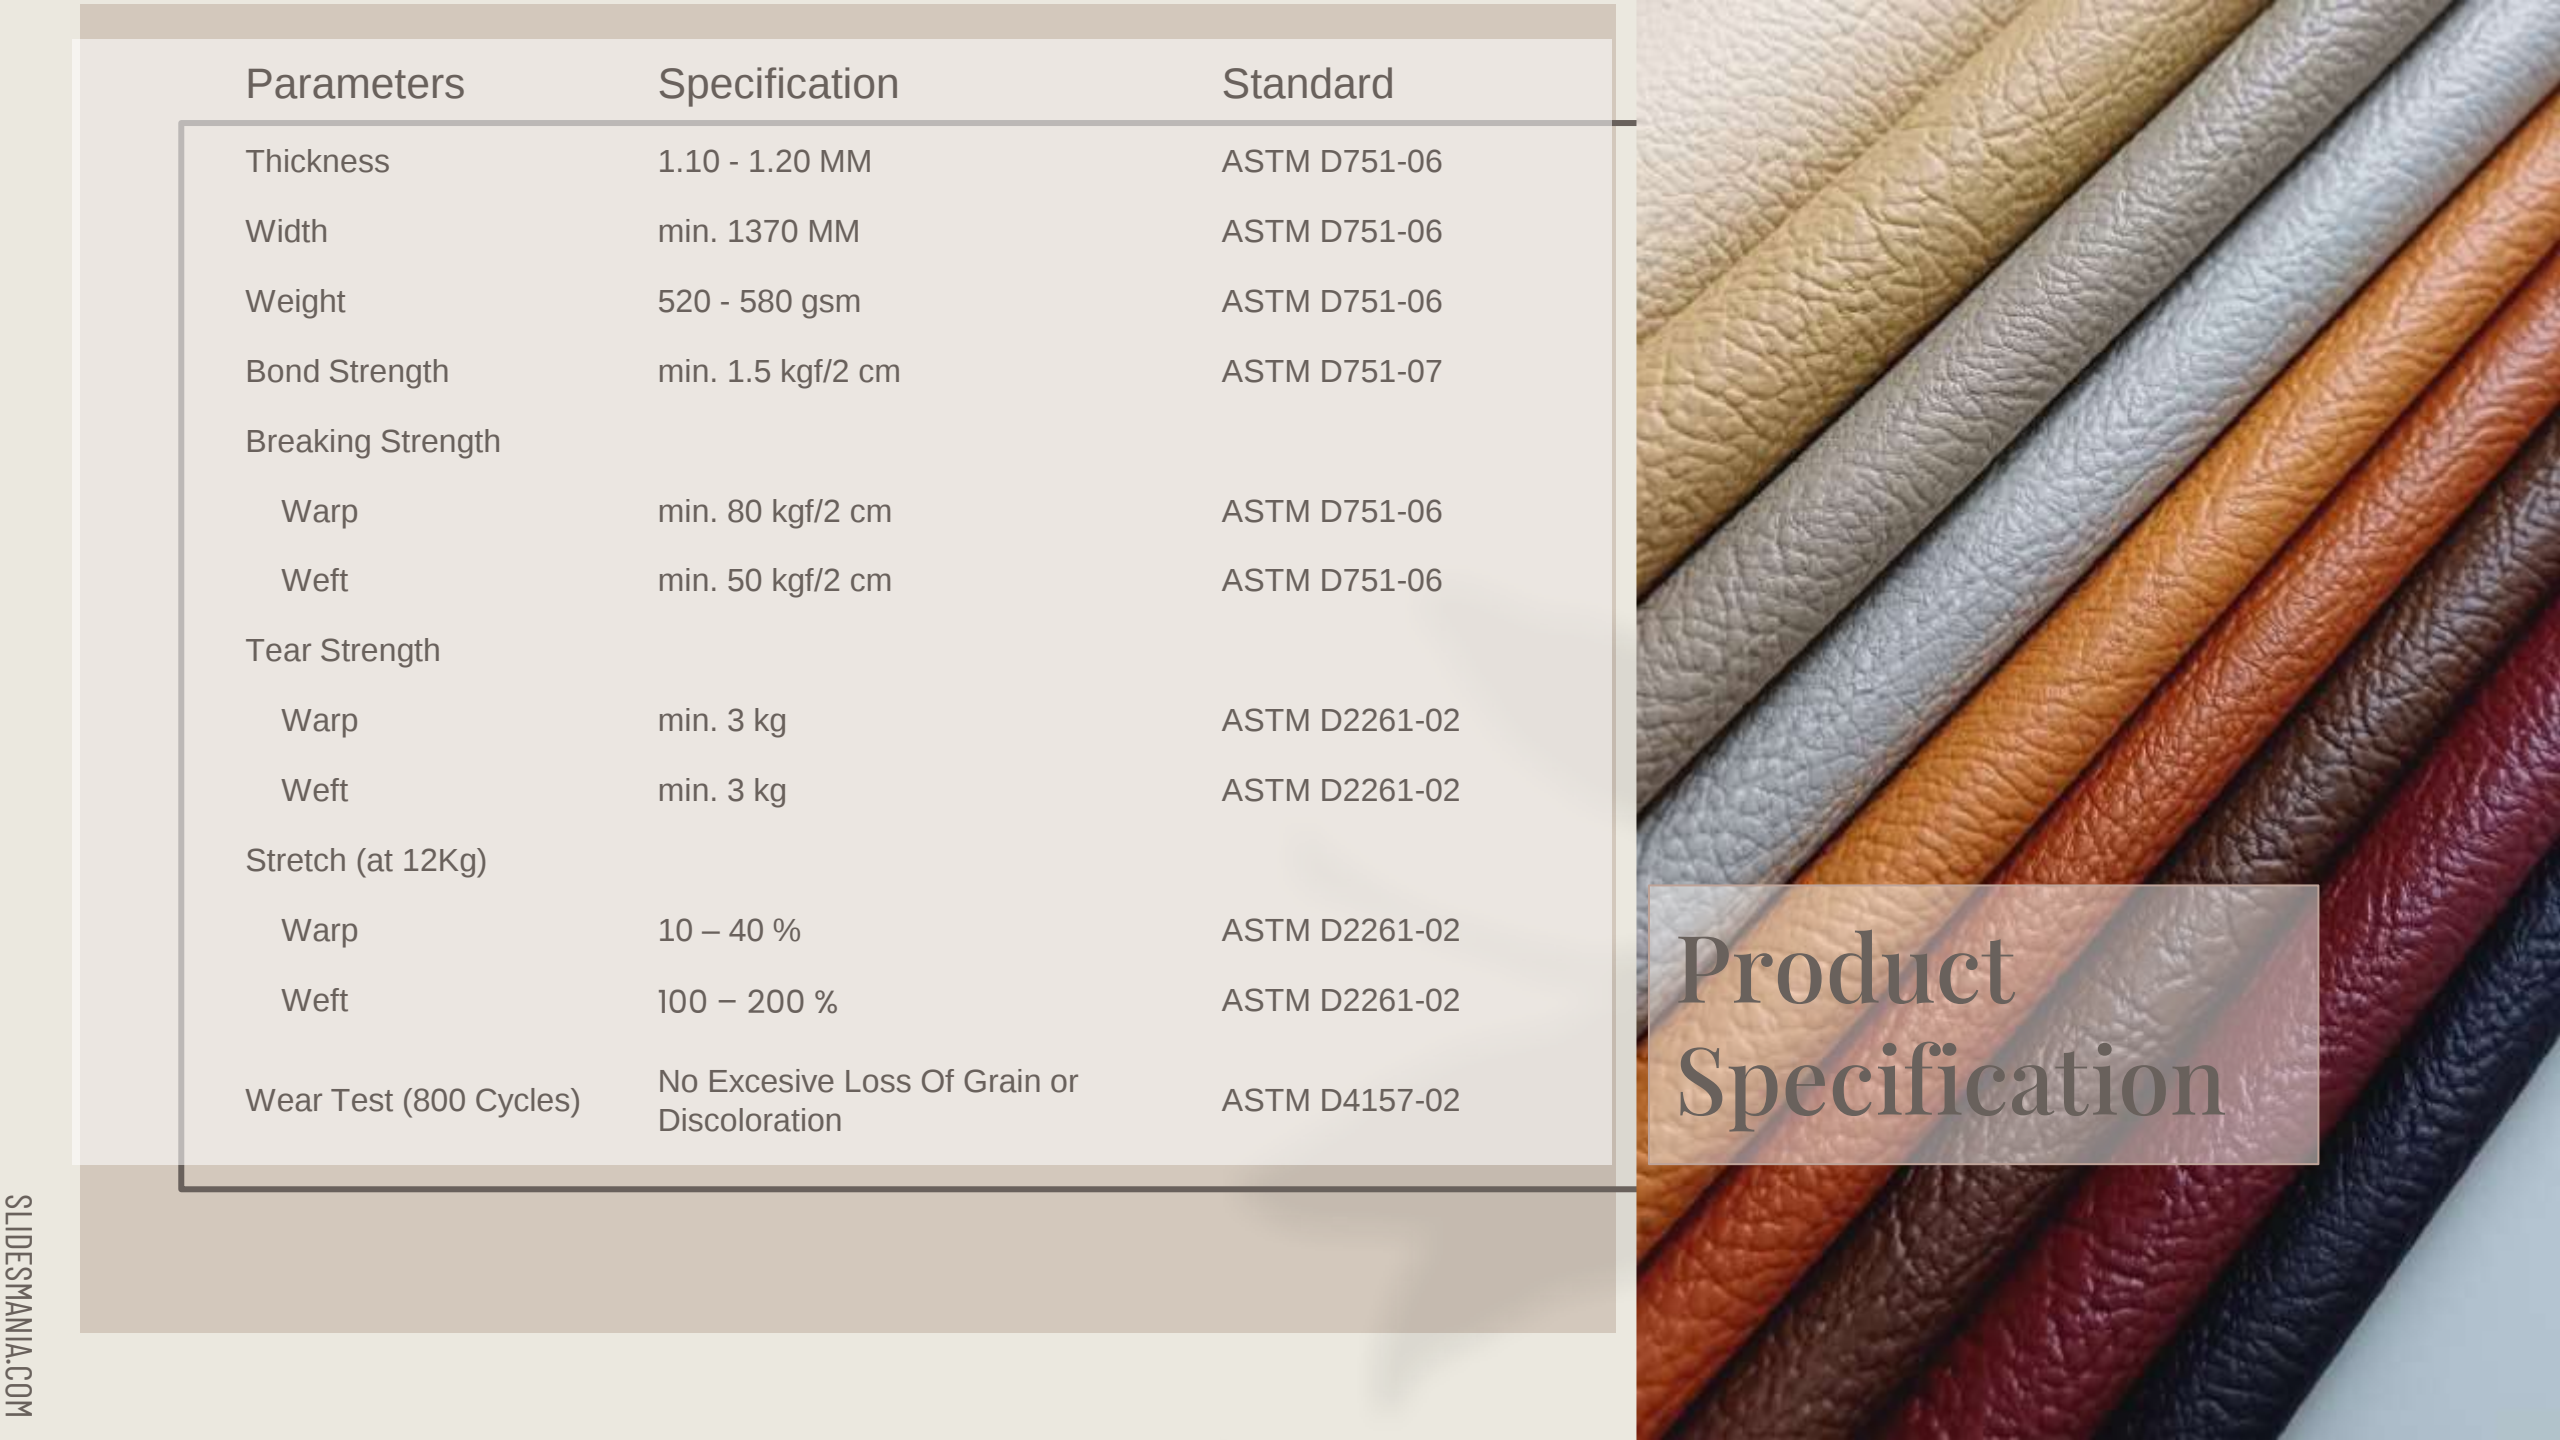

Product Specification

Parameters	Specification	Standard
Thickness	1.10 - 1.20 MM	ASTM D751-06
Width	min. 1370 MM	ASTM D751-06
Weight	520 - 580 gsm	ASTM D751-06
Bond Strength	min. 1.5 kgf/2 cm	ASTM D751-07
Breaking Strength		
Warp	min. 80 kgf/2 cm	ASTM D751-06
Weft	min. 50 kgf/2 cm	ASTM D751-06
Tear Strength		
Warp	min. 3 kg	ASTM D2261-02
Weft	min. 3 kg	ASTM D2261-02
Stretch (at 12Kg)		
Warp	10 – 40 %	ASTM D2261-02
Weft	100 – 200 %	ASTM D2261-02
Wear Test (800 Cycles)	No Excessive Loss Of Grain or Discoloration	ASTM D4157-02

ETHNIC

Fabric inspired synthetic leather



ETHNIC

Color Ranges



White



Vanilla



Latte



Sunset




Lime



Blue Lagoon




Smoke

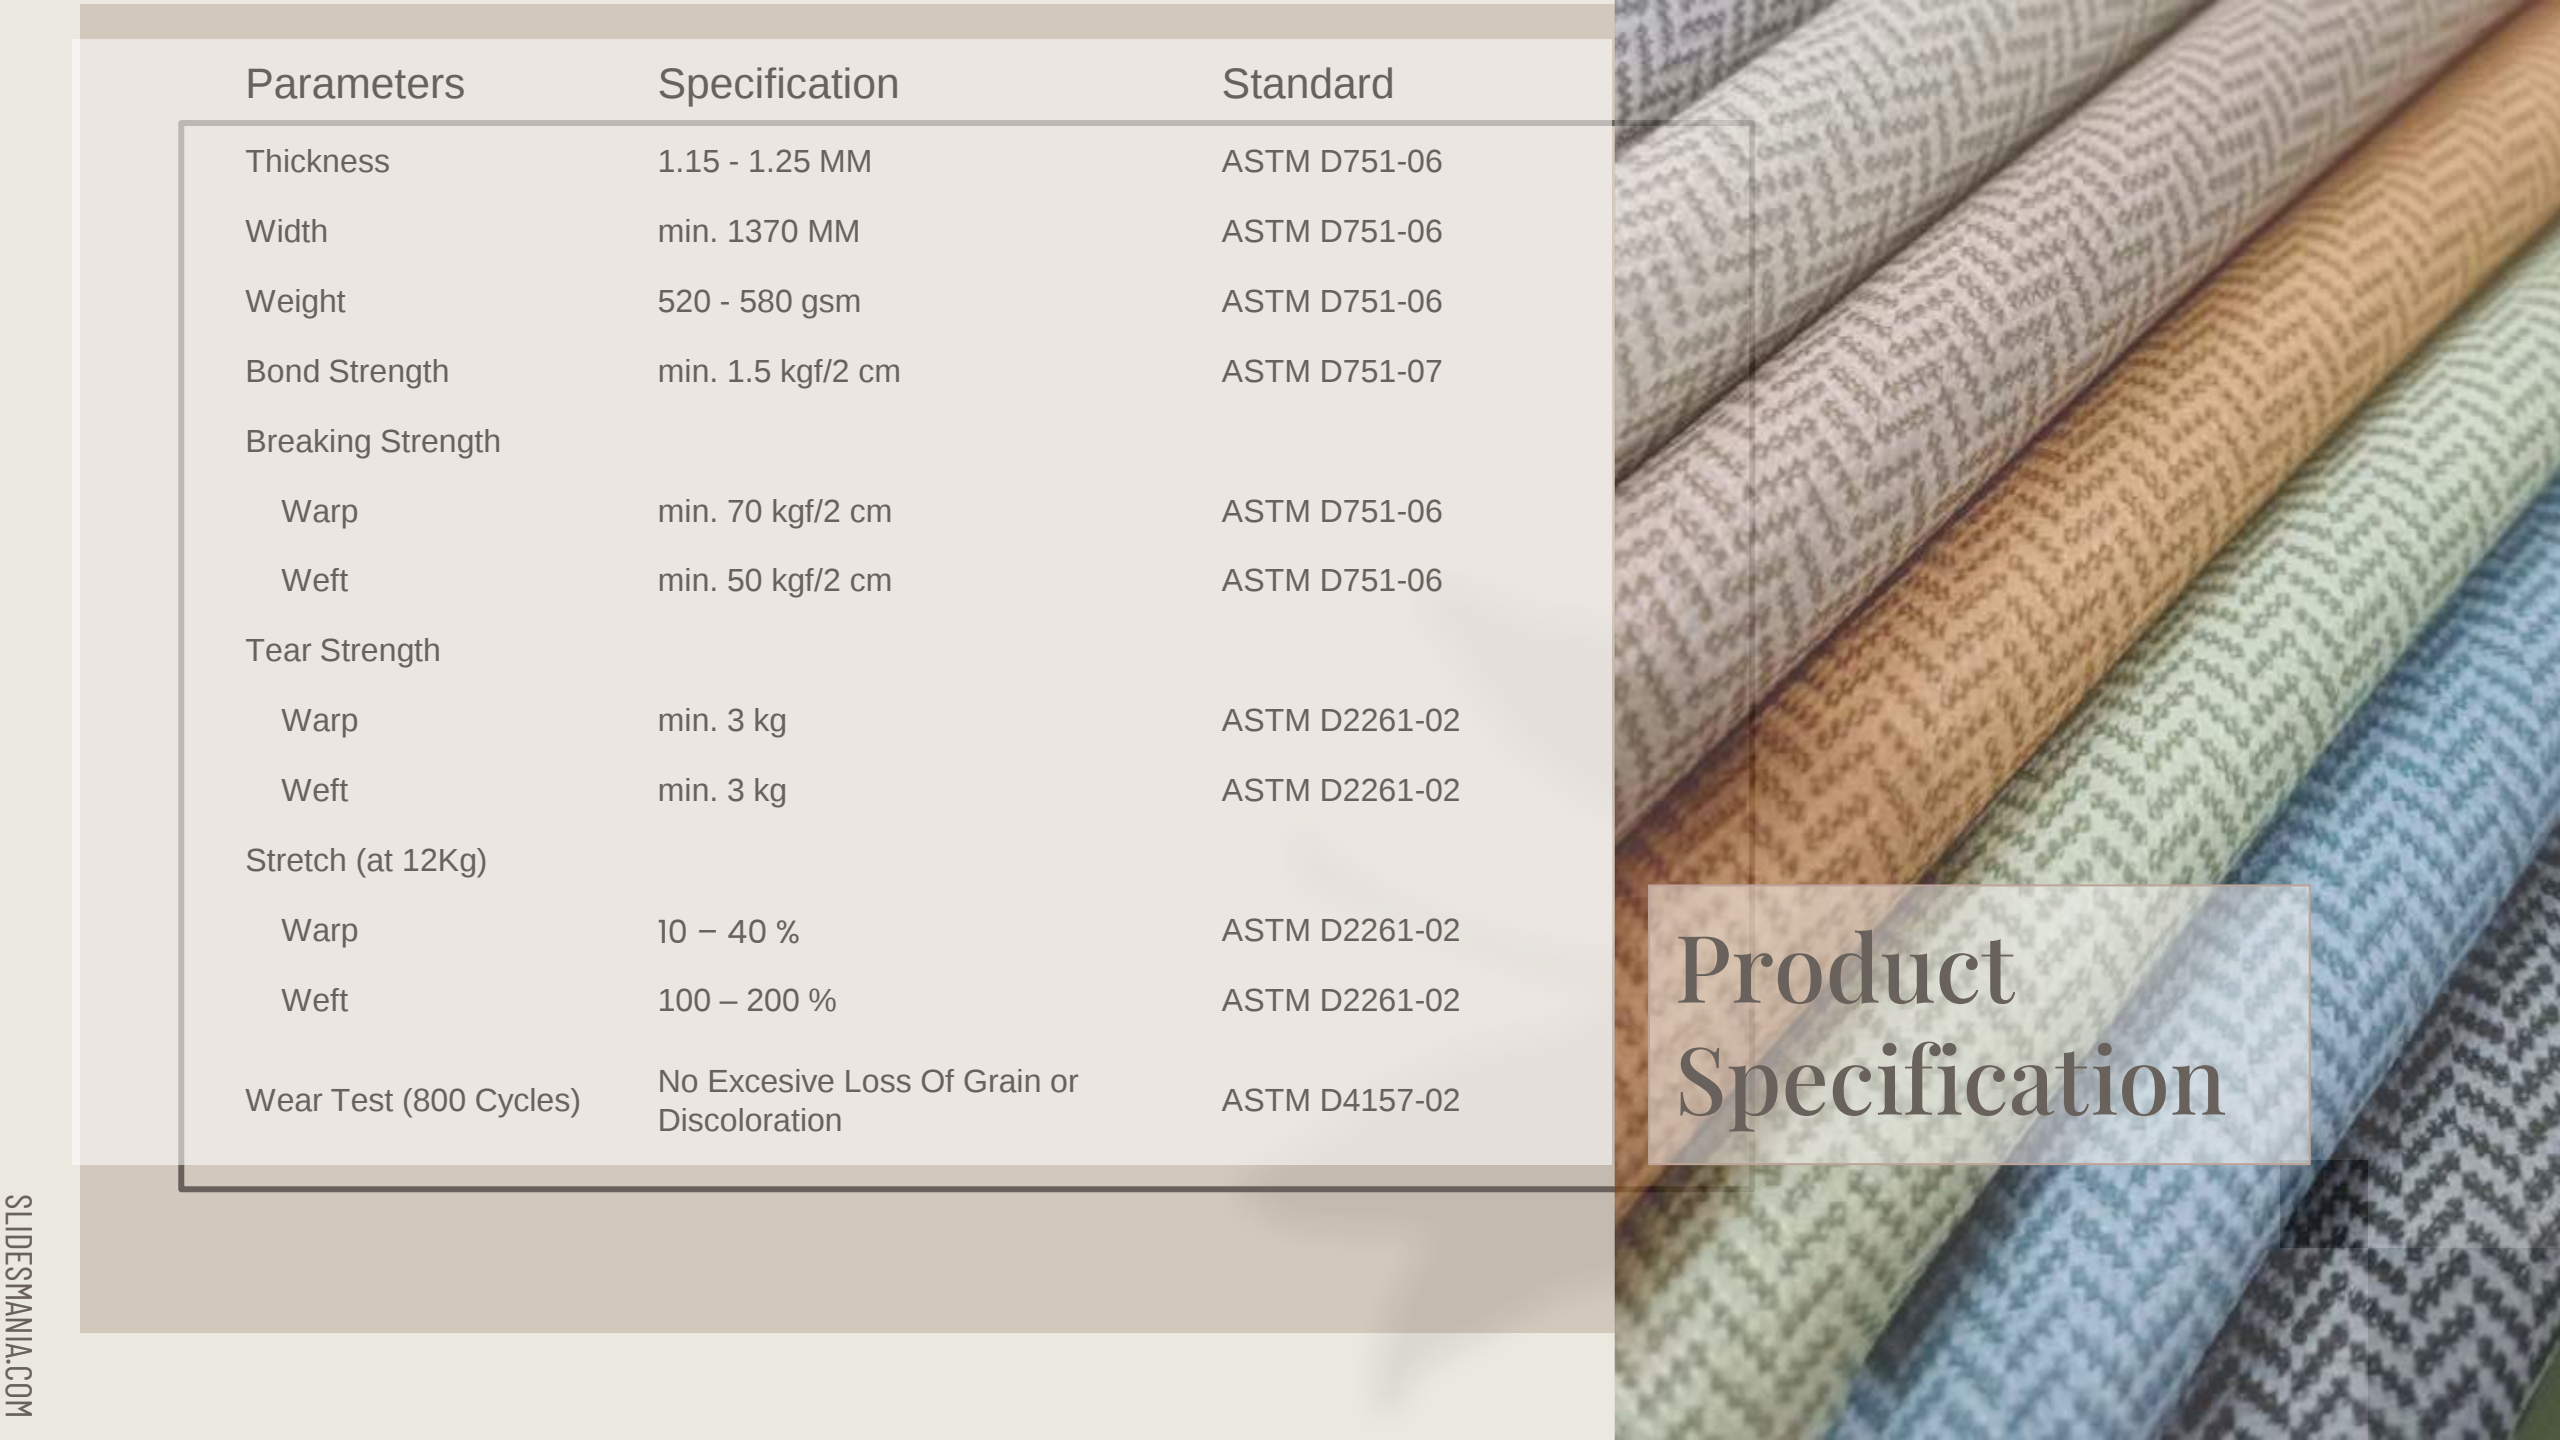

Product Specification

Parameters	Specification	Standard
Thickness	1.15 - 1.25 MM	ASTM D751-06
Width	min. 1370 MM	ASTM D751-06
Weight	520 - 580 gsm	ASTM D751-06
Bond Strength	min. 1.5 kgf/2 cm	ASTM D751-07
Breaking Strength		
Warp	min. 70 kgf/2 cm	ASTM D751-06
Weft	min. 50 kgf/2 cm	ASTM D751-06
Tear Strength		
Warp	min. 3 kg	ASTM D2261-02
Weft	min. 3 kg	ASTM D2261-02
Stretch (at 12Kg)		
Warp	10 – 40 %	ASTM D2261-02
Weft	100 – 200 %	ASTM D2261-02
Wear Test (800 Cycles)	No Excessive Loss Of Grain or Discoloration	ASTM D4157-02



Environmental ————— ————— Considerations!

Do you have any questions?

Contact us!

PT. SEKAR INTI NIAGA

Address : Ciputra World Office Tower 15th Floor
Unit 15-16, Jl. Mayjend Sungkono No. 89
Surabaya, Indonesia

Email : info@serin.id
Phone : +62811357352
Website : www.serin.id

Sales & Marketing



Find out more



SERIN —————
PT SEKAR INTI NIAGA