




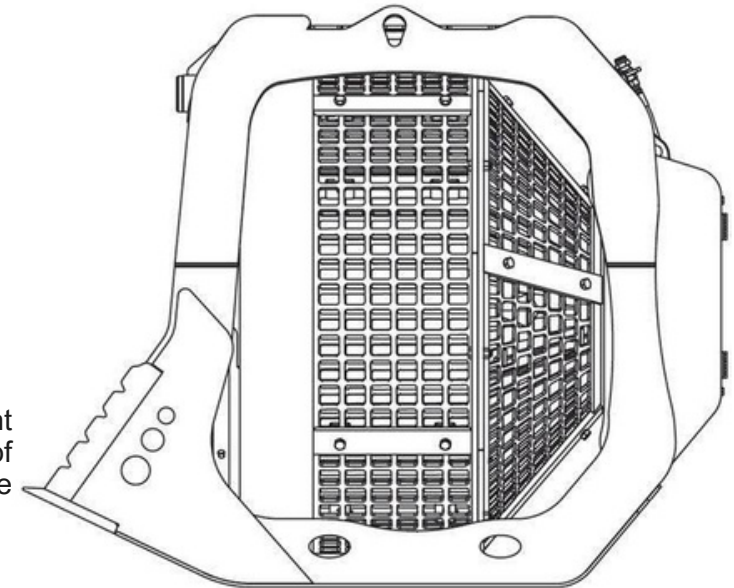



HS SERIES

9 MODELS SCREENING BUCKETS FROM 110 UP TO 4.900 KGS FOR CARRIERS FROM 1.5 ~ 55 TONS

HS Screening Buckets have the ability to be installed on all excavators. A hydraulic intermittent system allows it to be used with wet and dry materials. It has the advantage of onsite screening of various materials & are used for both before and after the crushing stage giving the owner the ability to manage materials best suited for the job. Can reduce crushing times up to 60 %.



		HS20	HS-30	HS-40	HS-70	HS-14	HS-16	HS-19	HS-26	HS-49
 (1) Excavatorclass	T.	1.5 - 2.5	3 - 5	5 - 8	8 - 12	13 - 16	17 - 21	22 - 30	31 - 40	41 - 55
 Weight	Kg.	110	250	350	690	1320	1570	1810	2550	4900
 Capacity	M3	0.2	0.2	0.3	0.4	0.75	0.9 200	1.1	1.5 200	2.7
 Workingpressure excavator	Bar	100 - 120	100 - 120	100 - 120	100 - 120	200 -	- 220 40	200 - 220	- 220 40	200 - 220
 Oilflow	L/min.	20 / 30	30 / 50	30 / 50	50 / 70	220 40 /	/ 80 18	40 / 80	/ 80 18	40 / 80
 Rotation	U/min.	24 / 32	18 / 24	18 / 24	18 / 24	80 18 /	/ 35	18 / 35	/ 35	18 / 35

35

Screeningkits from 20-100 mm