

东莞市旭田包装机械有限公司

DONGGUAN XUTIAN PACKING MACHINE CO.,LTD
www.xutianpack.com www.xutian-china.com

SUNPACK
PACKING MACHINE

XUTIAN
PACKING MACHINE

Xutian is a group company with 3 branches in different cities. We dedicate to end of line package development for years. We have more than 30 staff in our RND department. Provide our customers with the best quality products and serve our customers with our best effort, it is our main goal. We carry banding machine, strapping machine, pallet wrapper, case sealer and manual strapping tool in our range.

BETTER QUALITY & BETTER PRICE & BETTER SERVICE

WELCOME TO

SUNPACK
旭田欢迎您...



PROFILE 关于旭田

Xutian is dedicated to provide worldwide users with professional packaging solutions and focus on production of variety of packaging machinery. Xutian has decades of experience in packaging industry. With plants in different area, we can serve all our customers with fast and most convenient delivery. We delivered our machines to all over the world since we set up in 1997. Our RND department always follow up the world class technology and upgrade our products.

旭田包装致力于提供全球买家最先近的包装解决方案. 旭田有着丰富的包装行业的经验. 我们在浙江台州和广东东莞的工厂, 以及上海的办公室, 都让我们为客户提供好的服务提供了条件. 自从1997年建厂以来, 我们把旭田的产品卖到了全球各地. 我们的研发部门紧跟世界先进科技水平, 以及及时的改进我们的产品. 我们将致力于为我们客户提供更高质量的产品, 更快的服务, 最好的价格.





EXHIBITION
国际展会



PRODUCTION WORKSHOP
生产车间



TO PROVIDE OUR CUSTOMERS
WITH THE HIGHEST QUALITY PRODUCTS AND BEST SERVICE
IS OUR ULTIMATE GOAL

WAREHOUSE
仓储物流



WK02-20/30 Table top banding machine 桌上型束带机



WK02-20/WK02-30

FEATURES 特性

Banding machines have been a cost and labor saving solution for many industries across the world, such as pharmacy, printing, graphic, dairy products, currency industries. This banding machine uses a heat sealing system to bond the material together to form a nice tidy seal around the item.

束带机为世界上许多行业节约成本和人力提供了解决方案.广泛应用于医药,印刷,银行等行业.纸带和膜带的热熔合方式使得产品美观大方.



■ SPECIFICATION 技术参数

| Model No 型号 | WK02-20 | WK02-30 |
|-------------------------|--|---------------------------------------|
| Tape specification 带子规格 | 19.2-19.6mm W X 100-130MIC (Thickness) | 29.2-29.6mm W x 100-130MIC(Thickness) |
| Tape type 适用材料 | Opp film or Paper tape | Opp film or Paper tape |
| Arch size 框架尺寸 | 470 X 200mm | 470 x 200mm |
| Roll size 带卷规格 | 40MM Diameter X 150M L | 40MM Diameter x 150M L |
| Banding size 打包尺寸 | Max 460 X 200mm; Min30 X 10mm | Max 460 x 200mm;Min 30 x 10mm |
| Power supply 电压 | 220V/110V 50HZ/60HZ 1Phase | 220V/110V 50HZ/60HZ 1 Phase |
| Control system 控制系统 | PCB | PCB |
| Banding speed 打包速度 | 25PCS/M | 25PCS/M |
| Net weight 净重 | 32KG | 32kg |
| Welding method 粘合方式 | Heat sealing | Heating sealing |
| Banding tension 捆紧力 | 5-40N | 5-40N |
| Outline size 外形尺寸 | L621xW364xH474mm | L621xW364xH474mm |

WK02-30B High table banding machine 高台束带机



WK02-30B



WK02-30B-60



■ SPECIFICATION 技术参数

| Model No 型号 | WK02-30B | WK02-30B-60 |
|-------------------------|--|---------------------------------------|
| Tape specification 带子规格 | 29.2-29.6mm W X 100-130MIC (Thickness) | 29.2-29.6mm W x 100-130MIC(Thickness) |
| Tape type 适用材料 | Opp film or Paper tape | Opp film or Paper tape |
| Arch size 框架尺寸 | 470 X 200mm | 600 x 600mm |
| Roll size 带卷规格 | 40MM Diameter X 800M L | 40MM Diameter x 800M L |
| Banding size 打包尺寸 | Max 460 X 200mm; Min30 X 10mm | Max 600 x 600mm;Min 30 x 10mm |
| Power supply 电压 | 220V/110V 50HZ/60HZ 1Phase | 220V/110V 50HZ/60HZ 1 Phase |
| Control system 控制系统 | PCB | PCB |
| Banding speed 打包速度 | 25PCS/M | 25PCS/M |
| Net weight 净重 | 72KG | 80kg |
| Welding method 粘合方式 | Heat sealing | Heating sealing |
| Banding tension 捆紧力 | 5-40N | 5-40N |
| Outline size 外形尺寸 | L621xW430xH1214mm | L621xW430xH1214mm |
| Table height 台面高度 | 980mm(可定做850mm) | 980mm(可定做850mm) |

WK04-30

High speed banding machine 高速束带机

FEATURES 特性

1. Can use 60-80mu Plastic tape
2. with Pause function
3. High speed up to 31 bands/min
4. with counter
5. High tension
6. Touch screen control box
7. Precise tension adjustment
8. Step control to clear tape jam
9. Heat sealing
10. New arch guide design
11. photo eye on table top



可用60-80MU的膜带节约材料
带暂停功能,空打不会卡带
带计数器
加大拉紧力
速度快31条/分钟
PLC施耐德触摸屏控制
中空带槽设计,进带更顺



■ SPECIFICATION 技术参数

| Model No 型号 | WK04-30 |
|-------------------------|--|
| Tape specification 带子规格 | Plastic film: 29.4 mm W X60-100MIC (Thickness) Paper film: 29.4mm W x 100-130MIC(Thickness) |
| Tape type 适用材料 | Opp film , Paper tape,kraft paper |
| Arch size 框架尺寸 | 430 X 200mm |
| Roll size 带卷规格 | Plastic film: 40MM Diameter X 150-300M L Paper tape: 40MM diameter x 150-180M L |
| Banding size 打包尺寸 | Max 420 X 200mm; Min30 X 10mm |
| Power supply 电压 | 220V/110V 50HZ/60HZ 1Phase |
| Control system 控制系统 | PCB +Touch screen control |
| Banding speed 打包速度 | 33PCS/M |
| Net weight 净重 | 34KG |
| Welding method 粘合方式 | Heat sealing |
| Banding tension 捆紧力 | 5-40N |
| Outline size 外形尺寸 | L607xW347xH509mm |

WK04-30B

High table banding machine 高台高速束带机

FEATURES 特性

1. Can use 60mu Plastic tape
2. with Pause function
3. High speed up to 33 bands/min
4. with counter
5. High tension
6. Touch screen control box
7. Precise tension adjustment
8. Step control to clear tape jam
9. Heat sealing
10. New arch guide design
11. photo eye on table top
12. Adjustable table height

可用60MU的膜带节约材料
带暂停功能,空打不会卡带
带计数器
加大拉紧力
速度快 33条/分
PLC 加触屏控制
中空带槽设计,进带更顺
桌面高度可调



■ SPECIFICATION 技术参数

| Model No 型号 | WK04-30B |
|-------------------------|---|
| Tape specification 带子规格 | Plastic film: 29.4 mm W X60-100MIC (Thickness) Paper film: 29.4mm W x100-130MIC(Thickness) |
| Tape type 适用材料 | Opp film , Paper tape,kraft paper |
| Arch size 框架尺寸 | 430 X 200mm |
| Roll size 带卷规格 | Plastic film: 76MM Diameter X 1250M L Paper tape: 76MM diameter x 500M L |
| Banding size 打包尺寸 | Max 420 X 200mm; Min30 X 10mm |
| Power supply 电压 | 220V/110V 50HZ/60HZ 1Phase |
| Control system 控制系统 | PCB +Touch screen control |
| Banding speed 打包速度 | 33PCS/M |
| Net weight 净重 | 75 KG |
| Welding method 粘合方式 | Heat sealing |
| Banding tension 捆紧力 | 5-40N |

WK04-50

High speed banding machine 高速束带机

FEATURES 特性

1. Can use 60-80mu Plastic tape
2. with Pause function
3. High speed up to 31 bands/min
4. with counter
5. High tension
6. Touch screen control box
7. Precise tension adjustment
8. Step control to clear tape jam
9. Heat sealing
10. New arch guide design
11. photo eye on table top

可用60-80MU的膜带节约材料
带暂停功能、空打不会卡带
带计数器
加大拉紧力
速度快31条/分钟
PLC施耐德触摸屏控制
中空带槽设计、进带更顺



■ SPECIFICATION 技术参数

| Model No 型号 | WK04-50 |
|-------------------------|--|
| Tape specification 带子规格 | Plastic film: 49 mm W X80-100MIC (Thickness) Paper film: 49 mm W x100-130MIC(Thickness) |
| Tape type 适用材料 | Opp film , Paper tape,kraft paper |
| Arch size 框架尺寸 | 430 X 200mm |
| Roll size 带卷规格 | Plastic film: 76MM Diameter X 1000m(80u) Paper tape: 76MM diameter x 500M L |
| Banding size 打包尺寸 | Max 420 X 200mm; Min30 X 10mm |
| Power supply 电压 | 220V/110V 50HZ/60HZ 1Phase |
| Control system 控制系统 | PCB+Touch screen control |
| Banding speed 打包速度 | 33PCS/M |
| Net weight 净重 | 75KG |
| Welding method 粘合方式 | Heat sealing |
| Banding tension 捆紧力 | 5-40N |

WK04-50B High table banding machine 高台高速束带机

FEATURES 特性

1. Can use 60mu Plastic tape
2. with Pause function
3. High speed up to 33 bands/min
4. with counter
5. High tension
6. Touch screen control box
7. Precise tension adjustment
8. Step control to clear tape jam
9. Heat sealing
10. New arch guide design
11. photo eye on table top
12. Adjustable table height

可用60MU的膜带节约材料
带暂停功能空打不会卡带
带计数器
加大拉紧力
速度快 33条/分
PLC 加触屏控制
中空带槽设计,进带更顺
桌面高度可调



■ SPECIFICATION 技术参数

| Model No 型号 | WK04-50B |
|-------------------------|--|
| Tape specification 带子规格 | Plastic film: 49 mm W X80-100MIC (Thickness) Paper film: 49 mm W x100-130MIC(Thickness) |
| Tape type 适用材料 | Opp film , Paper tape,kraft paper |
| Arch size 框架尺寸 | 430 X 200mm |
| Roll size 带卷规格 | Plastic film: 76MM Diameter X 1000m(80u) Paper tape: 76MM diameter x 500M L |
| Banding size 打包尺寸 | Max 420 X 200mm; Min30 X 10mm |
| Power supply 电压 | 220V/110V 50HZ/60HZ 1Phase |
| Control system 控制系统 | PCB +Touch screen control |
| Banding speed 打包速度 | 33PCS/M |
| Net weight 净重 | 75KG |
| Welding method 粘合方式 | Heat sealing |
| Banding tension 捆紧力 | 5-40N |

WK02-20ABS Automatic banding machine 在线式束带机



In-line model

FEATURES 特性

Photo eye or foot pedal operation
Digital screen control
Either paper or film tape can be used
Adjustable feeding tension and banding tension
Band package as small as 30 x 10mm and up to 460 x 200mm
Enter button to clear tape jam
Make 3 bands

可采用电眼或者脚踏开关操作
数码显示操作面板
纸带和膜带均可使用
送带力度和捆紧力度都可调整
可包装最小30*10MM, 最大460*200的物体
按ENTER 键就可清除卡带
可打3条带



■ SPECIFICATION 技术参数

| Model No 型号 | WK02-20ABS |
|-------------------------|---------------------------------------|
| Tape specification 带子规格 | 19.2-19.6mm W x 100-130MIC(Thickness) |
| Tape type 适用材料 | Opp film or Paper tape |
| Arch size 框架尺寸 | 470 x 200mm |
| Roll size 带卷规格 | 40MM Diameter x 500M L |
| Banding size 打包尺寸 | Max 460 x 200mm;Min 30 x 10mm |
| Power supply 电压 | 220V/110V 50HZ/60HZ 1 Phase |
| Control system 控制系统 | PLC |
| Banding speed 打包速度 | 20PCS/M |
| Net weight 净重 | 85KG |
| Welding method 粘合方式 | Heating sealing |
| Banding tension 捆紧力 | 5-40N |

WK02-30A Automatic banding machine 在线式束带机

In-line model

FEATURES 特性

Photo eye or foot pedal operation
Digital screen control
Either paper or film tape can be used
Adjustable feeding tension and banding tension
Band package as small as 30 x 10mm and up to 460 x 200mm
Enter button to clear tape jam

可采用电眼或者脚踏开关操作
数码显示操作面板
纸带和膜带均可使用
送带力度和捆紧力度都可调整
可包装最小30*10MM, 最大460*200的物体
按ENTER 键就可清除卡带



WK02-30A



WK02-30AB



■ SPECIFICATION 技术参数

| Model No 型号 | WK02-30A | WK02-30AB |
|-------------------------|--|---------------------------------------|
| Tape specification 带子规格 | 29.2-29.6mm W X 100-130MIC (Thickness) | 29.2-29.6mm W x 100-130MIC(Thickness) |
| Tape type 适用材料 | Opp film or Paper tape | Opp film or Paper tape |
| Arch size 框架尺寸 | 470 X 200mm | 470 x 200mm |
| Roll size 带卷规格 | 40MM Diameter X 150M L | 40MM Diameter x 800M L |
| Banding size 打包尺寸 | Max 460 X 200mm; Min30 X 10mm | Max 460 x 200mm;Min 30 x 10mm |
| Power supply 电压 | 220V/110V 50HZ/60HZ 1Phase | 220V/110V 50HZ/60HZ 1 Phase |
| Control system 控制系统 | PCB | PCB |
| Banding speed 打包速度 | 20PCS/M | 20PCS/M |
| Net weight 净重 | 42KG | 72kg |
| Welding method 粘合方式 | Heat sealing | Heating sealing |
| Banding tension 捆紧力 | 5-40N | 5-40N |
| Outline size 外形尺寸 | L648xW525xH505mm | |

GB-HD 250

20/30/40/50MM

Banding Machine 束带机

APPLICATION 应用

GB-HD 250 Banding Machine is specially designed for banding of all kind of small and sensitive products to bundles or stacks in the packaging field as well in the money handling field for banding of banknotes. The Bander is for use of PE-coated paper rolls (thermoband / craft paper) and PP film tape (polypropylene) without any changes. Banders are available for the widths of 20 mm, 30 mm, 40 mm and 50 mm. Banders with special widths will be manufactured on request.

GB-HD 250 束带机

专门设计用来打包各种小的和敏感的产品成捆或成堆
应用于包装领域和现金处理领域用来打包钞票
此束带机可使用没有任何更改的PE覆膜纸卷(牛皮纸)和PP膜带(聚丙烯)
此束带机适用于带宽20毫米,30毫米,40和50毫米
特殊的带宽可以根据要求定制



FEATURES 特性

Compact heavy duty design
Solid precise mechanical construction
Operation manually or automatically
Closing the band by heat sealing
Adjustable sealing temperature
Adjustable band guides depend to the product size
Adjustable band loop depend to the product size
Continuously adjustable banding tension
Foot switch (optional)

重型紧凑设计
机芯精确结实
手动或自动操作
热烫粘合
粘合温度可调
带轨可调根据产品尺寸
带圈可调根据产品尺寸
捆紧力可调
脚踏开关(可供选择)

SPECIFICATION 技术参数

| Model No 型号 | GB-HD 250 |
|---------------------------------------|---|
| Product dimension 产品尺寸 | width 宽度 25 to 250 mm / height 高度 5 to 200 mm |
| Band guides adjustable between 带轨可调范围 | 120 to 250mm |
| Working speed 打包速度 | 25 bundles /min. (捆/分钟) |
| Power supply 电压 | 220V/230V 50HZ 200VA, 1 phase; 110V 60HZ, 180VA, 1 phase different power supply on request 不同的电压可以定制 |
| Machine dimension L*W*H 机器尺寸长*宽*高 | 490X360X400 mm (including band guides)(包括带轨) |
| Machine weight 机器重量 | 32.5KG |

GB-HD 250 is in accordance with GB-HD 250符合 EC-as well RoHS-Regulations CE和RoHS标准

GB-S 200

20/30/40MM

Banding Machine 束带机

APPLICATION 应用

GB-S 200 Banding Machine is specially designed for banding of all kind of small and sensitive products to bundles or stacks in the packaging field as well in the money handling field for banding of banknotes. The Bander is for use of PE-coated paper rolls (thermoband/craft paper) and PP film tape (polypropylene) without any changes. Banders are available for the widths of 20mm, 30mm and 40mm. Special widths will be manufactured on request.

GB-S 200 束带机

专门设计用来打包各种小的和敏感的产品成捆或成堆
应用于包装领域和现金处理领域用来打包钞票
此束带机可使用没有任何更改的PE覆膜纸卷(牛皮纸)和PP膜带(聚丙烯)
此束带机适用于带宽20毫米,30毫米和40毫米
特殊的带宽可以根据要求定制



FEATURES 特性

Compact design
Solid precise mechanical construction
Operation manually or automatically
Closing the band by heat sealing
Adjustable sealing temperature
Adjustable band guides depend to the product size
Adjustable band loop depend to the product size
Continuously adjustable banding tension

结构紧凑
机芯结实精确
手动或自动操作
热烫粘合
粘合温度可调
带轨可调根据产品尺寸
带圈可调根据产品尺寸
捆紧力可调

SPECIFICATION 技术参数

| Model No 型号 | GB-S 200 |
|---------------------------------------|---|
| Product dimension 产品尺寸 | width 宽度 25 to 200 mm / height 高度 5 to 150 mm |
| Band guides adjustable between 带轨可调范围 | 120 to 200mm |
| Working speed 打包速度 | 25 bundles /min. (捆/分钟) |
| Power supply 电压 | 220V/230V 50HZ 200VA, 1 phase; 110V 60HZ, 180VA, 1 phase different power supply on request 不同的电压可以定制 |
| Machine dimension L*W*H 机器尺寸长*宽*高 | 410X320X350 mm (including band guides)(包括带轨) |
| Machine weight 机器重量 | 24KG |

GB-S 200 is in accordance with GB-S 200符合 EC-as well RoHS-Regulations CE和RoHS标准

WK02-30ABE Straight line banding machine 一字流水束带线



■ SPECIFICATION 技术参数

| Model No 型号 | WK02-30ABE |
|-------------------------|---------------------------------------|
| Tape specification 带子规格 | 29.2-29.6mm W x 100-130MIC(Thickness) |
| Tape type 适用材料 | Opp film or Paper tape |
| Banding size 适用尺寸 | 100-150mm L x 60-150mm W x 20-150mm H |
| Roll size 带卷规格 | 40MM Diameter x 500M L |
| Table height 台面高度 | 950mm |
| Power supply 电压 | 220V/110V 50HZ/60HZ 1 Phase |
| Control system 控制系统 | PLC |
| Banding speed 打包速度 | 21PACKS/M (50pcs/pack) |
| Net weight 净重 | 185KG |
| Welding method 粘合方式 | Heating sealing |
| Air 气源 | 0.6-0.8kg |
| Banding tension 捆紧力 | 5-40N |

WK02-30AM10 Pharmacy box banding machine 药盒翻包束带线



■ SPECIFICATION 技术参数

| Model No 型号 | WK02-30AM10 |
|-------------------------|---------------------------------------|
| Tape specification 带子规格 | 29.2-29.6mm W x 100-130MIC(Thickness) |
| Tape type 适用材料 | Opp film or Paper tape |
| Banding size 适用尺寸 | 100-150mm L x 50-120mm W x 15-30mm H |
| Roll size 带卷规格 | 40MM Diameter x 500M L |
| Table height 台面高度 | 950mm |
| Power supply 电压 | 220V/110V 50HZ/60HZ 1 Phase |
| Control system 控制系统 | PLC |
| Banding speed 打包速度 | 12PACKS/M |
| Net weight 净重 | 170KG |
| Welding method 粘合方式 | Heating sealing |
| Air 气源 | 0.6-0.8kg |
| Banding tension 捆紧力 | 5-40N |

WK02-30A4 Auto banding system for printing material 印刷业自动束带流水线



■ SPECIFICATION 技术参数

| Model No 机器型号 | WK02-30A4 |
|-------------------------|---|
| Tape specification 带子参数 | 29.2-29.6mm W x 100-130MIC(Thickness) |
| Tape type 带子种类 | Opp film , Paper tape,kraft paper |
| Arch size 框架尺寸 | 470 X 200mm |
| Roll size 带卷规格 | 40MM Diameter X 150-180M L |
| Banding size 束带尺寸 | L 280-320mm x W 180-220mm x H <=/=100mm |
| Loading weight 承重 | </=5kg |
| Power 功率 | 1000w |
| Power supply 电源 | 220V/110V 50HZ/60HZ 1Phase |
| Control system 控制系统 | PLC+Touch screen control |
| Banding speed 束带速度 | 10PCS/M |
| Net weight 机器净重 | 280KG |
| Welding method 粘合方式 | Heat sealing |
| Banding tension 捆紧力 | 5-40N |
| Machine dimension 机器尺寸 | L 1500 x W1450 x H 1690mm |

WK02-30-1032 Banding machine 大框架束带机

■ SPECIFICATION 技术参数

| Model No 型号 | WK02-30B-1032 |
|-------------------------|---------------------------------------|
| Tape specification 带子规格 | 29.2-29.6mm W x 100-130MIC(Thickness) |
| Tape type 适用材料 | Opp film or Paper tape |
| Arch size 框架尺寸 | 1000 x 320mm |
| Roll size 带卷规格 | 40MM Diameter x 800M L |
| Banding size 打包尺寸 | Max 1000 x 300mm;Min 30 x 10mm |
| Power supply 电压 | 220V/110V 50HZ/60HZ 1 Phase |
| Control system 控制系统 | PCB |
| Banding speed 打包速度 | 20PCS/M |
| Net weight 净重 | 80kg |
| Welding method 粘合方式 | Heating sealing |
| Banding tension 捆紧力 | 5-40N |



WK02-30B-1032

WK02-DZ Banding machine dispenser 束带机储带桌

■ SPECIFICATION 技术参数

| Model No 型号 | WK-DZ01 | WK-DZ02 |
|-------------------------|--------------------------------|-------------------------------|
| Tape specification 带子规格 | 30mm W X 50-130MIC (Thickness) | 30mm W x 50-130MIC(Thickness) |
| Tape type 适用材料 | Opp film or Paper tape | Opp film or Paper tape |
| Table height 桌面高度 | 755mm | 550-750mm adjustable |
| Roll size 带卷规格 | 76MM Diameter X 500-800M L | 76MM Diameter x 800-1200M L |
| Connection 连接方式 | Parallel connection 并联 | Series connection 串联 |
| Power supply 电压 | 220V/110V 50HZ/60HZ 1Phase | 220V/110V 50HZ/60HZ 1 Phase |
| Control system 控制系统 | PLC | PLC |
| Power 功率 | 60W | 60W |
| Net weight 净重 | 40KG | 45kg |
| Machine dimension 机器尺寸 | 614 x 430 x 755mm | 614 x 430 x 550-750mm |



WK-DZ01



WK-DZ02

WK04-30LAB Full automatic banding of labels 全自动标签束带机

Features 特性


Schneider PLC 施耐德 PLC
Dunker DC motor 德国Dunker直流电机

- 13-17 bands per minute
13-17带/分
- Use 60mic OPP plastic, save your cost up to 50%
可以使用宽度60mic OPP膜带，为你节约50%成本
- Can set for 1 band or 2 bands
可以设置1条或2条带
- Can choose use or not use the top press
可以选择是否顶部加压
- Easy tension adjustment
捆紧力可调
- High tension for small products
小物品捆紧力高度

Recommendation 推荐



Machine dimension 机器尺寸图

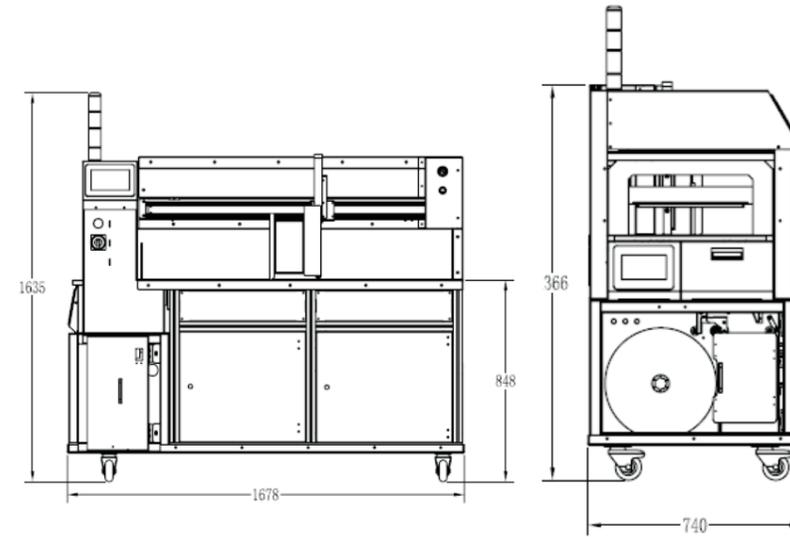

Introduction 导言

The entry model Wk04 series banding machine offer you a different banding experience. It improved the banding speed and banding tension.

Wk04系列此款型号束带机让你有不一样的束带效果,更重要的是束带速度和捆紧力

Banding machine is a consumable and labor cost saving solution. It is widely used in Printing, Graft arts, Pharmacy, Manufacturing, food and banking industries.

束带机是个节约耗材和人工成本的解决方案,它广泛用于印刷,画册,医药,工业,食品,银行业。

Why banding machine? 为什么选择束带机?

- Paper bands can be removed without a cutting tool
不用切割工具就可以拆断纸带
- Band won't damage your product edges and corners.
束带时不会受损您捆包物
- Paper is friendly for environment
纸带均采用环保型
- Printed bands show up your products
印刷带显示您的产品
- Transparent OPP band won't hide the information of your products
透明OPP带不会遮挡您产品的信息
- Easy operation
易操作
- Neat and nice banding
束带整齐美观

SPECIFICATION 技术参数

| Model No 型号 | WK04-30LAB |
|--------------------------------|--|
| Band specification 束带参数 | W:29.2-29.6mm Thickness: OPP: 60MIC, Paper: 80g/M2 |
| Band type 束带材料 | Opp or Paper band |
| Arch size 框架尺寸 | 400 X 200mm |
| Roll size 带卷尺寸 | 76MM Diameter X 800M L |
| Banding size 束带尺寸 | L: 100-850MM W: 50-280MM H: 5-170MM |
| Banding Speed 束带速度 | 13-17bands/M |
| Power supply 电源 | 220V/110V 50HZ/60HZ 1Phase |
| Control system 控制系统 | SCHNEIDER PLC |
| Welding method 粘合方式 | Heat sealing |
| Banding tension 束带捆紧力 | 5-40N |
| Air consumption 气源 | 0.6Mpa |
| Machine Net weight 机器重量 | 232KG |
| Power 功率 | 1500W |
| Machine dimension 机器尺寸 (LXWXH) | 1678*740*1366mm |

APPLICATION 应用领域

- Pharmacy 医药
- Food 食品
- Printing 印刷
- Banking 银行
- Manufacture 工业

Banding material 束带耗材



| Band type 带子类型 | Core diameter 卷芯直径 | Width 宽度 | Thickness 厚度 | Length 长度 | Packing 包装 |
|-------------------|--------------------|-------------|--------------|-----------|---------------------|
| Kraft Paper 牛皮纸 | 76mm | 29.2-29.6mm | 80g/m2 | 500-800M | 14 rolls/carton 卷/盒 |
| Opp Plastic OPP膜带 | 76mm | 29.2-29.6mm | 60mic | 800-1000M | 14 rolls/carton 卷/盒 |

SUNPACK

XUTIAN PACKING MACHINE

Xutian is a group company with 3 branches in different cities. We dedicate to end of line package development for years. We have more than 30 staff in our RND department. Provide our customers with the best quality products and serve our customers with our best effort, it is our main goal. We carry banding machine, strapping machine, pallet wrapper, case sealer and manual strapping tool in our range.

Dongguan Xutian Packing Machine Co.,Ltd
东莞市旭田包装机械有限公司

ADD: NO.951 Songfo Road,Dalang Town, Dongguan, Guangdong, China
地址:广东省东莞市大朗镇松佛路951号

Web: www.xutianpack.com www.xutian-china.com
Tel: +86-769-83123335 / 83131314/83131315
Fax: +86-769-83131818

Taizhou Xutian Packing Machine Co.,Ltd
台州旭田包装机械有限公司

ADD: NO.389-1 Haizheng Road, Jiaojiang District, Taizhou, Zhejiang, China
地址:浙江省台州市椒江区海正大道389-1

Tel: +86-576-88833688 / 88833689
Fax: +86-576-88833690

Shanghai Xutian Packing Machine Co.,Ltd
上海朝田包装机械有限公司

ADD: NO.258, Jiamei Road, Jiading District, Shanghai, China
地址:上海市嘉定区嘉美路258

Tel: +86-21-66112777 / 56061188
Fax: +86-21-56061188

国际
International
<http://www.xutianpack.com>
E-mail: joanna@xutian-china.com

国内
<http://www.xutian-china.com>
E-mail: lois@xutian-china.com



Authorised Distributor for Australia And New Zealand

Tru-strength International Pty. Ltd.

www.tru-strength-international.com

Tel: +61 433 158 606

info@tru-strength-international.com



DONGGUAN XUTIAN PACKING MACHINE CO.,LTD

东莞市旭田包装机械有限公司

SUNPACK
PACKING MACHINE

XUTIAN
PACKING MACHINE