

# Architectural OUTDOOR

## FLOOD LIGHT



FLOOD 7014  
50W/100W/150W/200W  
300W/400W/500W  
P.3-4



FLOOD 7015  
100W/150W/200W/300W  
450W/500W/750W/1000W  
P.5-6



FLOOD 7016  
200W/400W/500W/600W  
720W/800W  
P.9-10




FLOOD 7017  
500W/1000W/1500W/2000W  
P.12



# LED Flood Light - C6 Series



High-temperature-resistant nano-material reflective sheet, UV-resistant, long-lasting without yellowing, high-brightness 3030 light-emitting diode (LED) source, with a luminous efficiency of up to 140lm/W.

ADC12 die-cast aluminum housing. IP65 Waterproof, UV resistant, tempered glass cover plate.

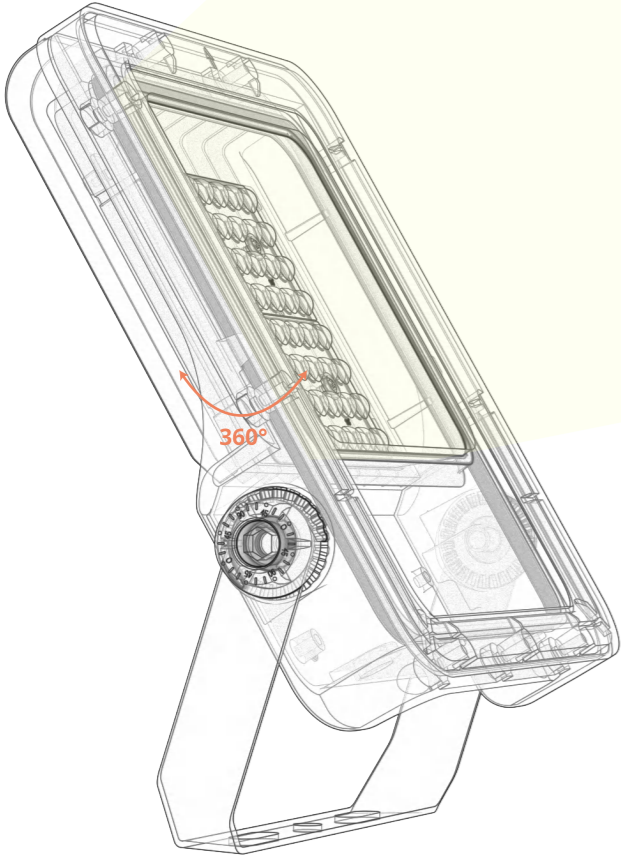

High thermal conductivity aluminum substrate, which can quickly dissipate the heat generated by the lamp chip, maintaining a higher luminous flux retention rate of the lamp.

Optical PC lens, with precise light control, resistant to UV, and not yellowing even after long-term use.

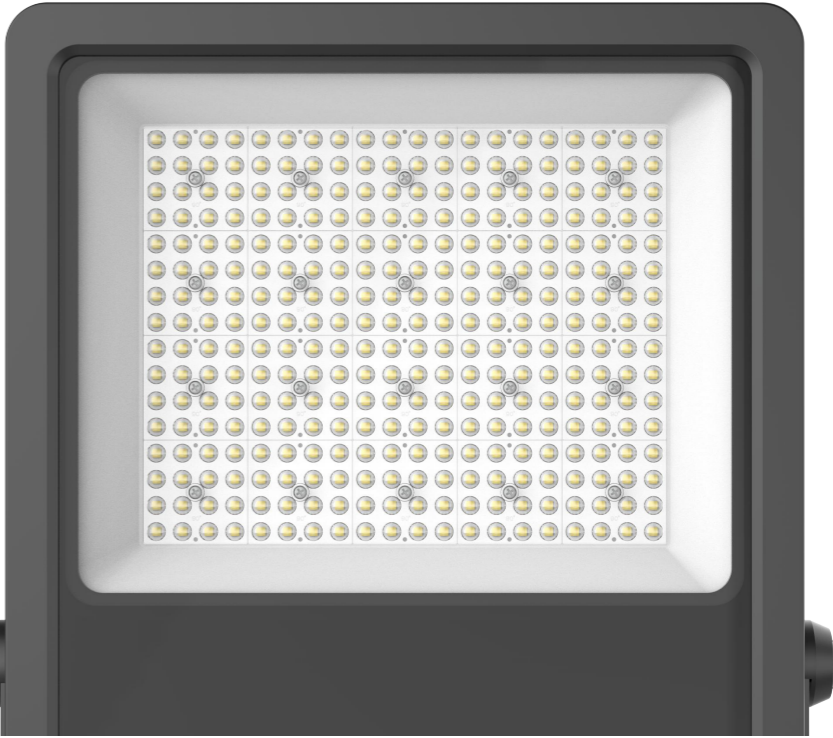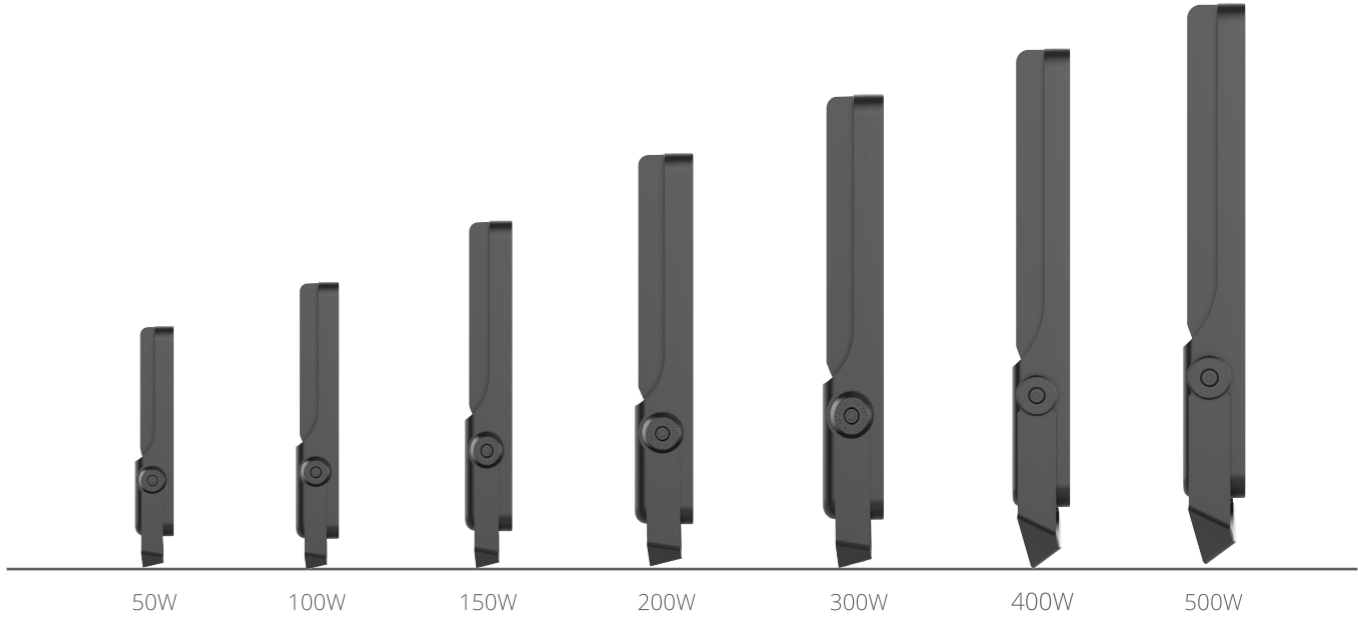

# 7014


Downlight Recessed. Ambience/UGR

FLOOD series

IP65



# Architectural OUTDOOR

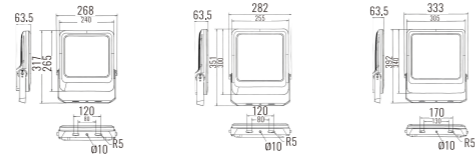


OSRAM 50,000hrs SMD LED LM80 Adf Ra >80 UGR <19 IP66 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	50W	265x268x63.5mm	6325lm	4870lm	● 2700K	701412.B.P.C
SMD LED	50W	265x268x63.5mm	6750lm	5198lm	● 3000K	701413.B.P.C
SMD LED	50W	265x268x63.5mm	7175lm	5525lm	○ 4000K	701414.B.P.C
SMD LED	50W	265x268x63.5mm	7452lm	5738lm	○ 5000K	701415.B.P.C
SMD LED	100W	300x282x63.5mm	12650lm	9740lm	● 2700K	701422.B.P.C
SMD LED	100W	300x282x63.5mm	13500lm	10395lm	● 3000K	701423.B.P.C
SMD LED	100W	300x282x63.5mm	14351lm	11050lm	○ 4000K	701424.B.P.C
SMD LED	100W	300x282x63.5mm	14904lm	11476lm	○ 5000K	701425.B.P.C
SMD LED	150W	340x333x63.5mm	18974lm	14610lm	● 2700K	701432.B.P.C
SMD LED	150W	340x333x63.5mm	20250lm	15593lm	● 3000K	701433.B.P.C
SMD LED	150W	340x333x63.5mm	21526lm	16575lm	○ 4000K	701434.B.P.C
SMD LED	150W	340x333x63.5mm	22356lm	17214lm	○ 5000K	701435.B.P.C

Beam Angle: B(1-30° 2-60° 3-90° 4-120°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)



# 7014


Downlight Recessed. Ambience/UGR

FLOOD series

IP65



# Architectural OUTDOOR

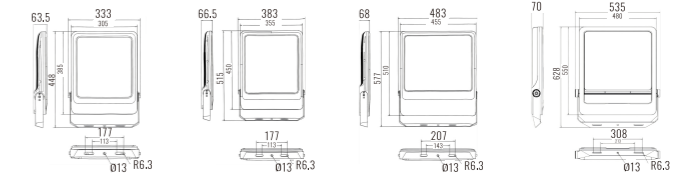

OSRAM 50,000hrs SMD LED LM80 Adf Ra >80 UGR <19 IP66 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	200W	385x333x63.5mm	25299lm	19480lm	● 2700K	701442.B.P.C
SMD LED	200W	385x333x63.5mm	27000lm	20790lm	● 3000K	701443.B.P.C
SMD LED	200W	385x333x63.5mm	28701lm	22100lm	○ 4000K	701444.B.P.C
SMD LED	200W	385x333x63.5mm	29808lm	22952lm	○ 5000K	701445.B.P.C
SMD LED	300W	450x383x66.5mm	37949lm	29220lm	● 2700K	701452.B.P.C
SMD LED	300W	450x383x66.5mm	40500lm	31185lm	● 3000K	701453.B.P.C
SMD LED	300W	450x383x66.5mm	43052lm	33150lm	○ 4000K	701454.B.P.C
SMD LED	300W	450x383x66.5mm	44712lm	34428lm	○ 5000K	701455.B.P.C
SMD LED	400W	510x483x68mm	50598lm	38960lm	● 2700K	701462.B.P.C
SMD LED	400W	510x483x68mm	54000lm	41580lm	● 3000K	701463.B.P.C
SMD LED	400W	510x483x68mm	57402lm	44200lm	○ 4000K	701464.B.P.C
SMD LED	400W	510x483x68mm	59616lm	45904lm	○ 5000K	701465.B.P.C
SMD LED	500W	550x535x70mm	63248lm	48701lm	● 2700K	701472.B.P.C
SMD LED	500W	550x535x70mm	67500lm	51975lm	● 3000K	701473.B.P.C
SMD LED	500W	550x535x70mm	71753lm	55249lm	○ 4000K	701474.B.P.C
SMD LED	500W	550x535x70mm	74520lm	57380lm	○ 5000K	701475.B.P.C

Beam Angle: B(1-30° 2-60° 3-90° 4-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



# 7015


Downlight Recessed. Ambience/UGR

FLOOD series

IP65



# Architectural OUTDOOR

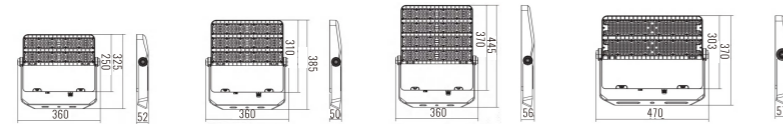


Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	100W	325x360x52mm	11806lm	9091lm	● 2700K	701512.B.P.C
SMD LED	100W	325x360x52mm	12600lm	9702lm	● 3000K	701513.B.P.C
SMD LED	100W	325x360x52mm	13394lm	10313lm	○ 4000K	701514.B.P.C
SMD LED	100W	325x360x52mm	13910lm	10711lm	○ 5000K	701515.B.P.C
SMD LED	150W	385x360x50mm	17709lm	13636lm	● 2700K	701522.B.P.C
SMD LED	150W	385x360x50mm	18900lm	14553lm	● 3000K	701523.B.P.C
SMD LED	150W	385x360x50mm	20091lm	15470lm	○ 4000K	701524.B.P.C
SMD LED	150W	385x360x50mm	20866lm	16067lm	○ 5000K	701525.B.P.C
SMD LED	200W	445x360x56mm	21926lm	16883lm	● 2700K	701532.B.P.C
SMD LED	200W	445x360x56mm	23400lm	18018lm	● 3000K	701533.B.P.C
SMD LED	200W	445x360x56mm	24874lm	19153lm	○ 4000K	701534.B.P.C
SMD LED	200W	445x360x56mm	25834lm	19892lm	○ 5000K	701535.B.P.C
SMD LED	300W	370x470x57mm	27829lm	21428lm	● 2700K	701542.B.P.C
SMD LED	300W	370x470x57mm	29700lm	22869lm	● 3000K	701543.B.P.C
SMD LED	300W	370x470x57mm	31571lm	24310lm	○ 4000K	701544.B.P.C
SMD LED	300W	370x470x57mm	32789lm	25247lm	○ 5000K	701545.B.P.C

Beam Angle: B(1-15° 2-30° 3-60° 4-120° 5-70°\*140°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



# 7015


Downlight Recessed. Ambience/UGR

FLOOD series

IP65



# Architectural OUTDOOR

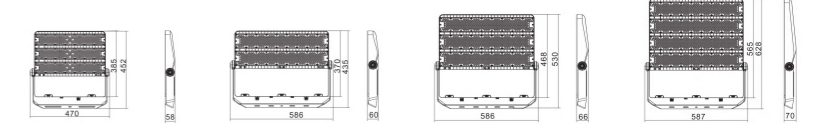


Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	450W	452x470x58mm	41743lm	32142lm	● 2700K	701552.B.P.C
SMD LED	450W	452x470x58mm	44550lm	34304lm	● 3000K	701553.B.P.C
SMD LED	450W	452x470x58mm	47357lm	36465lm	○ 4000K	701554.B.P.C
SMD LED	450W	452x470x58mm	49183lm	37871lm	○ 5000K	701555.B.P.C
SMD LED	500W	435x586x60mm	48490lm	37337lm	● 2700K	701562.B.P.C
SMD LED	500W	435x586x60mm	51750lm	39848lm	● 3000K	701563.B.P.C
SMD LED	500W	435x586x60mm	55010lm	42358lm	○ 4000K	701564.B.P.C
SMD LED	500W	435x586x60mm	57132lm	43992lm	○ 5000K	701565.B.P.C
SMD LED	750W	530x586x66mm	69572lm	53571lm	● 2700K	701572.B.P.C
SMD LED	750W	530x586x66mm	74250lm	57173lm	● 3000K	701573.B.P.C
SMD LED	750W	530x586x66mm	78928lm	60774lm	○ 4000K	701574.B.P.C
SMD LED	750W	530x586x66mm	81972lm	63118lm	○ 5000K	701575.B.P.C
SMD LED	1000W	587x628x70mm	92763lm	71428lm	● 2700K	701582.B.P.C
SMD LED	1000W	587x628x70mm	99000lm	76230lm	● 3000K	701583.B.P.C
SMD LED	1000W	587x628x70mm	105237lm	81032lm	○ 4000K	701584.B.P.C
SMD LED	1000W	587x628x70mm	109296lm	84158lm	○ 5000K	701585.B.P.C

Beam Angle: B(1-15° 2-30° 3-60° 4-120° 5-70°\*140°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)





200W



400W







500W/600W




720W/800W


Dimension

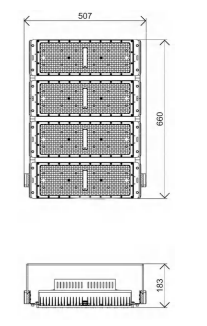


Beam Angel

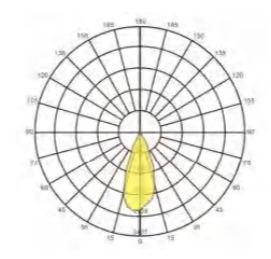

30°

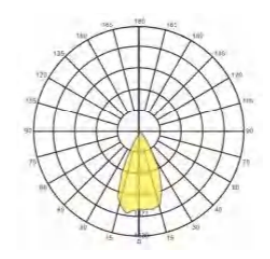

60°

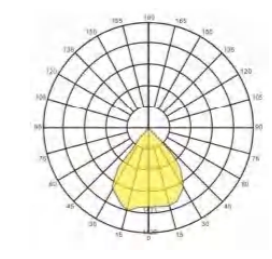

90°

# 7016


Downlight Recessed. Ambience/UGR

FLOOD series

IP65



# Architectural OUTDOOR

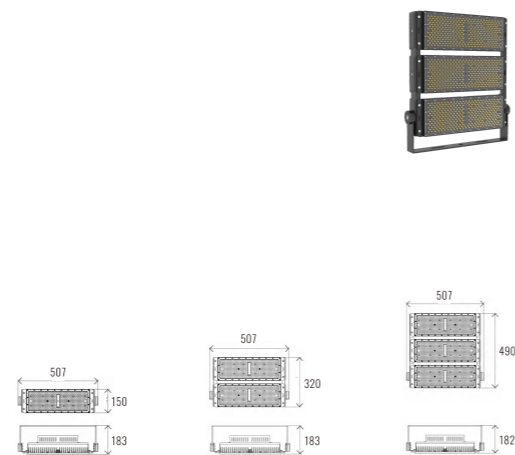


OSRAM 50,000hrs SMD LED LM80 Adj. Ra >80 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	200W	507x150x183mm	20239lm	15584lm	● 2700K	701612.B.P.C
SMD LED	200W	507x150x183mm	21600lm	16632lm	● 3000K	701613.B.P.C
SMD LED	200W	507x150x183mm	22961lm	17680lm	○ 4000K	701614.B.P.C
SMD LED	200W	507x150x183mm	23846lm	18362lm	○ 5000K	701615.B.P.C
SMD LED	400W	507x320x183mm	38792lm	29870lm	● 2700K	701622.B.P.C
SMD LED	400W	507x320x183mm	41400lm	31878lm	● 3000K	701623.B.P.C
SMD LED	400W	507x320x183mm	44008lm	33886lm	○ 4000K	701624.B.P.C
SMD LED	400W	507x320x183mm	45706lm	35193lm	○ 5000K	701625.B.P.C
SMD LED	500W	507x490x182mm	48490lm	37337lm	● 2700K	701632.B.P.C
SMD LED	500W	507x490x182mm	51750lm	39848lm	● 3000K	701633.B.P.C
SMD LED	500W	507x490x182mm	55010lm	42358lm	○ 4000K	701634.B.P.C
SMD LED	500W	507x490x182mm	57132lm	43992lm	○ 5000K	701635.B.P.C

Beam Angle: B(1-30° 2-60° 3-90°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



# 7016


Downlight Recessed. Ambience/UGR

FLOOD series

IP65



# Architectural OUTDOOR

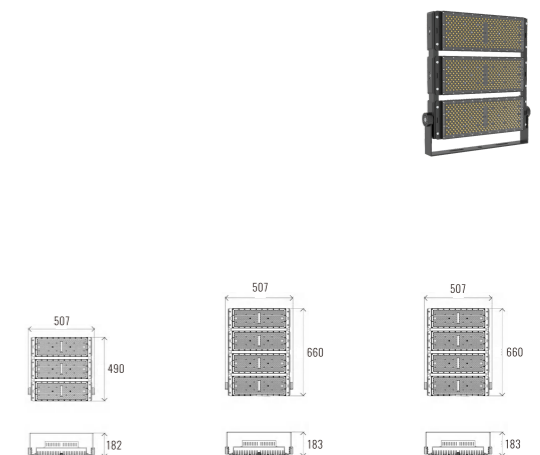


OSRAM 50,000hrs SMD LED LM80 Adj. Ra >80 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	600W	507x490x182mm	58188lm	44805lm	● 2700K	701642.B.P.C
SMD LED	600W	507x490x182mm	62100lm	47817lm	● 3000K	701643.B.P.C
SMD LED	600W	507x490x182mm	66012lm	50829lm	○ 4000K	701644.B.P.C
SMD LED	600W	507x490x182mm	68558lm	52790lm	○ 5000K	701645.B.P.C
SMD LED	720W	507x660x183mm	66789lm	51428lm	● 2700K	701652.B.P.C
SMD LED	720W	507x660x183mm	71280lm	54886lm	● 3000K	701653.B.P.C
SMD LED	720W	507x660x183mm	75771lm	58343lm	○ 4000K	701654.B.P.C
SMD LED	720W	507x660x183mm	78693lm	60594lm	○ 5000K	701655.B.P.C
SMD LED	800W	507x660x183mm	67464lm	51947lm	● 2700K	701662.B.P.C
SMD LED	800W	507x660x183mm	72000lm	55440lm	● 3000K	701663.B.P.C
SMD LED	800W	507x660x183mm	76536lm	58933lm	○ 4000K	701664.B.P.C
SMD LED	800W	507x660x183mm	79488lm	61206lm	○ 5000K	701665.B.P.C

Beam Angle: B(1-30° 2-60° 3-90°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)






# 7017

Downlight Recessed. Ambience/UGR

FLOOD series

IP65

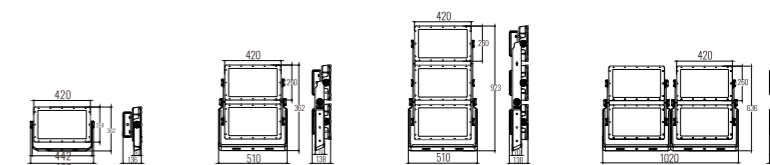

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	500W	420x365x136mm	47646lm	36688lm	3000K	701712.B.P.C
SMD LED	500W	420x365x136mm	50850lm	39155lm	4000K	701713.B.P.C
SMD LED	500W	420x365x136mm	54054lm	41621lm	5000K	701714.B.P.C
SMD LED	500W	420x365x136mm	56138lm	43227lm	6000K	701715.B.P.C
SMD LED	1000W	420x622x138mm	96136lm	74025lm	3000K	701722.B.P.C
SMD LED	1000W	420x622x138mm	102600lm	79002lm	4000K	701723.B.P.C
SMD LED	1000W	420x622x138mm	109064lm	83979lm	5000K	701724.B.P.C
SMD LED	1000W	420x622x138mm	113270lm	87218lm	6000K	701725.B.P.C
SMD LED	1500W	420x923x138mm	139145lm	107141lm	3000K	701732.B.P.C
SMD LED	1500W	420x923x138mm	148500lm	114345lm	4000K	701733.B.P.C
SMD LED	1500W	420x923x138mm	157856lm	121549lm	5000K	701734.B.P.C
SMD LED	1500W	420x923x138mm	163944lm	126237lm	6000K	701735.B.P.C
SMD LED	2000W	1020x636x138mm	185526lm	142855lm	3000K	701742.B.P.C
SMD LED	2000W	1020x636x138mm	198000lm	152460lm	4000K	701743.B.P.C
SMD LED	2000W	1020x636x138mm	210474lm	152065lm	5000K	701744.B.P.C
SMD LED	2000W	1020x636x138mm	218592lm	168316lm	6000K	701745.B.P.C

Beam Angle: B(1-30° 2-45° 3-60° 4-90° 5-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)

