

INGROUND LIGHT



INGROUND 7041
6W/12W/18W/24W
P.2



INGROUND 7042
9W/18W/36W/54W
P.5



INGROUND 7043
9W/18W/36W/54W
P.7



INGROUND 7044
3W/6W/12W/18W/24W/36W
P.9-10



INGROUND 7045
6W/12W/20W/25W/36W
P.13



INGROUND 7046
3W/6W/12W/20W/25W/36W
P.16-17



INGROUND 7047
3W/6W/12W/18W/27W/36W
P.20-21



INGROUND 7048
6W/12W/20W/25W/36W
P.24



INGROUND 7049
2W/4.5W/6.5W/10W/15W
P.26



INGROUND 7050
2W/4.5W/6.5W/10W/15W
P.27



INGROUND 7051
2W/4.5W/6.5W/10W/15W
P.28



INGROUND 7052
2W/4.5W/6.5W/10W/15W
P.29



INGROUND 7053
2W
P.31



INGROUND 7054
6W
P.32



INGROUND 7055
12W
P.33




INGROUND 7056
18W/24W/36W/48W
P.35



INGROUND 7057
18W/24W/36W/48W
P.36



INGROUND 7058
18W/24W/36W/48W
P.38



INGROUND 7059
12W
P.41



INGROUND 7060
18W
P.42

7041


Downlight Recessed. Ambience/UGR

INGROUND series


IP67



39mm



Ø135×H39mm



Ø165×H39mm



Ø182×H39mm

OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra <90	UGR <19	IP67	5 years Warranty	AC200-240V /DC24V	CE	Stainless Steel +Aluminum	6° 8° 10° 12° 20°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	----------------------	----	------------------------------	-------------------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	6W	Ø135x39mm	590lm	331lm	● 2700K	704112.B.P.C
SMD LED	6W	Ø135x39mm	630lm	362lm	● 3000K	704113.B.P.C
SMD LED	6W	Ø135x39mm	670lm	398lm	● 4000K	704114.B.P.C
SMD LED	6W	Ø135x39mm	696lm	438lm	● 5000K	704115.B.P.C
SMD LED	12W	Ø165x39mm	1181lm	661lm	● 2700K	704122.B.P.C
SMD LED	12W	Ø165x39mm	1260lm	723lm	● 3000K	704123.B.P.C
SMD LED	12W	Ø165x39mm	1339lm	797lm	● 4000K	704124.B.P.C
SMD LED	12W	Ø165x39mm	1391lm	876lm	● 5000K	704125.B.P.C
SMD LED	18W	Ø182x39mm	1771lm	992lm	● 2700K	704132.B.P.C
SMD LED	18W	Ø182x39mm	1890lm	1085lm	● 3000K	704133.B.P.C
SMD LED	18W	Ø182x39mm	2009lm	1195lm	● 4000K	704134.B.P.C
SMD LED	18W	Ø182x39mm	2087lm	1315lm	● 5000K	704135.B.P.C
SMD LED	24W	Ø182x39mm	2361lm	1322lm	● 2700K	704142.B.P.C
SMD LED	24W	Ø182x39mm	2520lm	1446lm	● 3000K	704143.B.P.C
SMD LED	24W	Ø182x39mm	2679lm	1594lm	● 4000K	704144.B.P.C
SMD LED	24W	Ø182x39mm	2782lm	1753lm	● 5000K	704145.B.P.C

Beam Angle: B(1-6°2-8°3-10°4-12°5-20°6-24°7-30°8-40°9-60°10-15°40°11-20°40°12-25°45°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black)



Black



POCHE



7042

Downlight Recessed. Ambience/UGR

INGROUND series

IP67


Architectural OUTDOOR

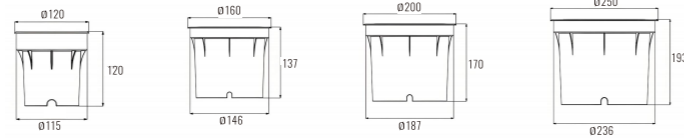
















Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	9W	∅120x120mm	902lm	537lm	● 2700K	704212.B.P.C
SMD LED	9W	∅120x120mm	963lm	607lm	● 3000K	704213.B.P.C
SMD LED	9W	∅120x120mm	1024lm	659lm	○ 4000K	704214.B.P.C
SMD LED	9W	∅120x120mm	1063lm	707lm	○ 5000K	704215.B.P.C
SMD LED	18W	∅160x137mm	1805lm	1074lm	● 2700K	704222.B.P.C
SMD LED	18W	∅160x137mm	1926lm	1213lm	● 3000K	704223.B.P.C
SMD LED	18W	∅160x137mm	2047lm	1318lm	○ 4000K	704224.B.P.C
SMD LED	18W	∅160x137mm	2126lm	1414lm	○ 5000K	704225.B.P.C
SMD LED	36W	∅200x170mm	3609lm	2148lm	● 2700K	704232.B.P.C
SMD LED	36W	∅200x170mm	3852lm	2427lm	● 3000K	704233.B.P.C
SMD LED	36W	∅200x170mm	4095lm	2637lm	○ 4000K	704234.B.P.C
SMD LED	36W	∅200x170mm	4253lm	2828lm	○ 5000K	704235.B.P.C
SMD LED	54W	∅250x193mm	5414lm	3221lm	● 2700K	704242.B.P.C
SMD LED	54W	∅250x193mm	5778lm	3640lm	● 3000K	704243.B.P.C
SMD LED	54W	∅250x193mm	6142lm	3955lm	○ 4000K	704244.B.P.C
SMD LED	54W	∅250x193mm	6379lm	4242lm	○ 5000K	704245.B.P.C

Beam Angle: B(1-10° 2-15° 3-30° 4-45° 5-60° 6-20*45° 7-10*60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



7043


Downlight Recessed. Ambience/UGR

INGROUND series

IP67



Architectural OUTDOOR

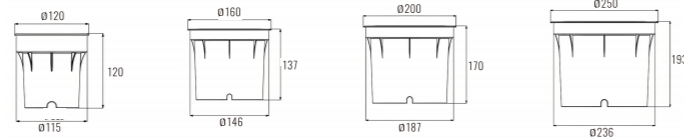


OSRAM 50,000hrs SMD LED LM80 Fixed Ra <90 UGR <19 IP67 5 years Warranty AC200-240V /DC24V CE Stainless Steel +Aluminum 15° 30° 45° 60° 20°/45°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	9W	Ø120x120mm	928lm	532lm	● 2700K	704312.B.P.C
SMD LED	9W	Ø120x120mm	990lm	589lm	● 3000K	704313.B.P.C
SMD LED	9W	Ø120x120mm	1052lm	648lm	● 4000K	704314.B.P.C
SMD LED	9W	Ø120x120mm	1093lm	704lm	● 5000K	704315.B.P.C
SMD LED	18W	Ø160x137mm	1855lm	1065lm	● 2700K	704322.B.P.C
SMD LED	18W	Ø160x137mm	1980lm	1178lm	● 3000K	704323.B.P.C
SMD LED	18W	Ø160x137mm	2105lm	1297lm	● 4000K	704324.B.P.C
SMD LED	18W	Ø160x137mm	2186lm	1408lm	● 5000K	704325.B.P.C
SMD LED	36W	Ø200x170mm	3711lm	2130lm	● 2700K	704332.B.P.C
SMD LED	36W	Ø200x170mm	3960lm	2356lm	● 3000K	704333.B.P.C
SMD LED	36W	Ø200x170mm	4209lm	2593lm	● 4000K	704334.B.P.C
SMD LED	36W	Ø200x170mm	4372lm	2815lm	● 5000K	704335.B.P.C
SMD LED	54W	Ø250x193mm	5566lm	3195lm	● 2700K	704342.B.P.C
SMD LED	54W	Ø250x193mm	5940lm	3534lm	● 3000K	704343.B.P.C
SMD LED	54W	Ø250x193mm	6314lm	3890lm	● 4000K	704344.B.P.C
SMD LED	54W	Ø250x193mm	6558lm	4223lm	● 5000K	704345.B.P.C

Beam Angle: B(1-15° 2-30° 3-45° 4-60° 5-20°/45° 6-10°/60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)




7044

Downlight Recessed. Ambience/UGR

INGROUND series

IP67

Architectural OUTDOOR

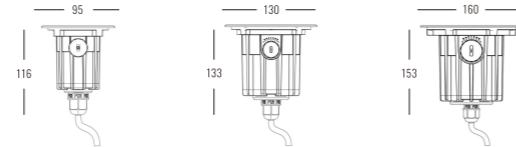


OSRAM 50,000hrs | COB | LED LM80 | Fixed | Ra <90 | UGR <19 | IP67 | 5 years Warranty | AC220-240V /DC24V | CE | Stainless Steel +Aluminum | 5° 8° 12° 15° 25°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	3W	∅95x116mm	323lm	181lm	● 2700K	704412.B.P.C
COB LED	3W	∅95x116mm	345lm	198lm	● 3000K	704413.B.P.C
COB LED	3W	∅95x116mm	367lm	218lm	○ 4000K	704414.B.P.C
COB LED	3W	∅95x116mm	381lm	240lm	○ 5000K	704415.B.P.C
COB LED	6W	∅130x133mm	647lm	362lm	● 2700K	704422.B.P.C
COB LED	6W	∅130x133mm	690lm	396lm	● 3000K	704423.B.P.C
COB LED	6W	∅130x133mm	733lm	436lm	○ 4000K	704424.B.P.C
COB LED	6W	∅130x133mm	762lm	480lm	○ 5000K	704425.B.P.C
COB LED	12W	∅160x153mm	1293lm	742lm	● 2700K	704432.B.P.C
COB LED	12W	∅160x153mm	1380lm	821lm	● 3000K	704433.B.P.C
COB LED	12W	∅160x153mm	1467lm	924lm	○ 4000K	704434.B.P.C
COB LED	12W	∅160x153mm	1524lm	992lm	○ 5000K	704435.B.P.C

Beam Angle: B(1-5° 2-8° 3-12° 4-15° 5-25° 6-40° 7-60° 8-10° 45° 9-20° 65°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1 -Black 2 - Grey)




7044

Downlight Recessed. Ambience/UGR

INGROUND series

IP67

Architectural OUTDOOR

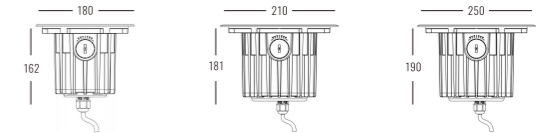

OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra <90 | UGR <19 | IP67 | 5 years Warranty | AC200-240V /DC24V | CE | Stainless Steel +Aluminum | 6° 8° 10° 12° 20°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	18W	∅180x162mm	1940lm	1113lm	● 2700K	704452.B.P.C
SMD LED	18W	∅180x162mm	2070lm	1232lm	● 3000K	704453.B.P.C
SMD LED	18W	∅180x162mm	2200lm	1386lm	○ 4000K	704454.B.P.C
SMD LED	18W	∅180x162mm	2285lm	1488lm	○ 5000K	704455.B.P.C
SMD LED	24W	∅210x181mm	2586lm	1484lm	● 2700K	704462.B.P.C
SMD LED	24W	∅210x181mm	2760lm	1642lm	● 3000K	704463.B.P.C
SMD LED	24W	∅210x181mm	2934lm	1848lm	○ 4000K	704464.B.P.C
SMD LED	24W	∅210x181mm	3047lm	1984lm	○ 5000K	704465.B.P.C
SMD LED	36W	∅250x190mm	3879lm	2227lm	● 2700K	704472.B.P.C
SMD LED	36W	∅250x190mm	4140lm	2463lm	● 3000K	704473.B.P.C
SMD LED	36W	∅250x190mm	4401lm	2773lm	○ 4000K	704474.B.P.C
SMD LED	36W	∅250x190mm	4571lm	2975lm	○ 5000K	704475.B.P.C

Beam Angle: B(1-5° 2-8° 3-12° 4-15° 5-25° 6-40° 7-60° 8-10° 45° 9-20° 65°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1 -Black 2 - Grey)



Depth COB Inground Light

Deep anti glare design finally makes the light can reach a high of URG ≤ 16 , no glare, no dazzle, more comfortable.

No glare, no dazzle

Deep anti glare design



130mm




7045

Downlight Recessed. Ambience/UGR

INGROUND series

IP67

Architectural OUTDOOR

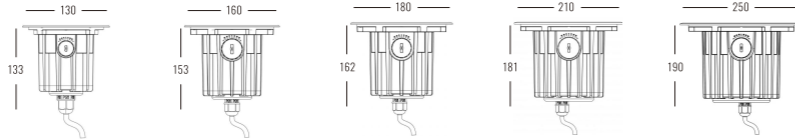

OSRAM 50,000hrs	COB	LED LM80	Fixed	Ra >90	UGR <16	IP67	5 years Warranty	AC220-240V /DC12/24V	CE	Stainless Steel +Aluminum	18° 24° 38° 60°
--------------------	-----	-------------	-------	-----------	------------	------	---------------------	-------------------------	----	------------------------------	-----------------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	6W	Ø130x133mm	675lm	354lm	● 2700K	704512.B.P.C
COB LED	6W	Ø130x133mm	720lm	393lm	● 3000K	704513.B.P.C
COB LED	6W	Ø130x133mm	765lm	439lm	● 4000K	704514.B.P.C
COB LED	6W	Ø130x133mm	795lm	479lm	● 5000K	704515.B.P.C
COB LED	12W	Ø160x153mm	1349lm	708lm	● 2700K	704522.B.P.C
COB LED	12W	Ø160x153mm	1440lm	786lm	● 3000K	704523.B.P.C
COB LED	12W	Ø160x153mm	1531lm	879lm	● 4000K	704524.B.P.C
COB LED	12W	Ø160x153mm	1590lm	957lm	● 5000K	704525.B.P.C
COB LED	20W	Ø180x162mm	2249lm	1181lm	● 2700K	704532.B.P.C
COB LED	20W	Ø180x162mm	2400lm	1310lm	● 3000K	704533.B.P.C
COB LED	20W	Ø180x162mm	2551lm	1464lm	● 4000K	704534.B.P.C
COB LED	20W	Ø180x162mm	2650lm	1595lm	● 5000K	704535.B.P.C
COB LED	25W	Ø210x181mm	2811lm	1476lm	● 2700K	704542.B.P.C
COB LED	25W	Ø210x181mm	3000lm	1638lm	● 3000K	704543.B.P.C
COB LED	25W	Ø210x181mm	3189lm	1830lm	● 4000K	704544.B.P.C
COB LED	25W	Ø210x181mm	3312lm	1994lm	● 5000K	704545.B.P.C
COB LED	36W	Ø250x190mm	4048lm	2125lm	● 2700K	704552.B.P.C
COB LED	36W	Ø250x190mm	4320lm	2359lm	● 3000K	704553.B.P.C
COB LED	36W	Ø250x190mm	4592lm	2636lm	● 4000K	704554.B.P.C
COB LED	36W	Ø250x190mm	4769lm	2871lm	● 5000K	704555.B.P.C

Beam Angle: B(1-18° 2-24° 3-38° 4-60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black)

Für allgemeine Anfragen, technischen Support oder Informationen zur Treiberkompatibilität – www.pochelicht.de.
For general enquiries, technical support, or driver compatibility details – www.pochelicht.de.






7046

Downlight Recessed. Ambience/UGR

INGROUND series

IP67

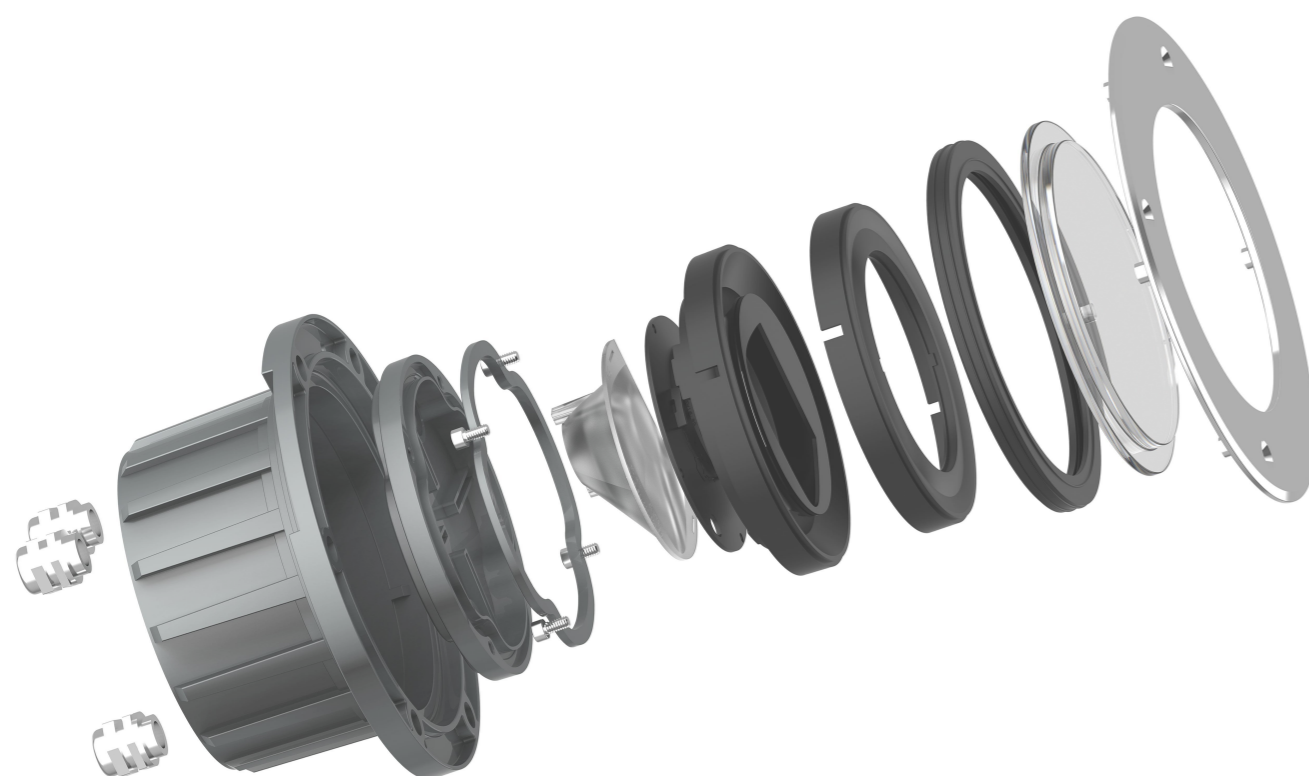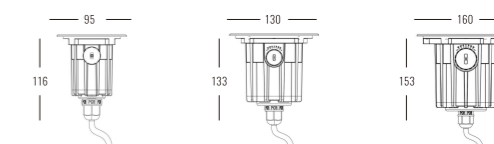

OSRAM	50,000hrs	COB	LED LM80	Fixed	Ra >90	UGR <19	IP67	5 years Warranty	AC220-240V DC12/24V	CE	Stainless Steel +Aluminum	Asymmetric
-------	-----------	-----	----------	-------	--------	---------	------	------------------	---------------------	----	---------------------------	------------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	3W	∅95x116mm	332lm	190lm	● 2700K	704612.B.P.C
COB LED	3W	∅95x116mm	354lm	211lm	● 3000K	704613.B.P.C
COB LED	3W	∅95x116mm	376lm	232lm	● 4000K	704614.B.P.C
COB LED	3W	∅95x116mm	391lm	254lm	● 5000K	704615.B.P.C
COB LED	6W	∅130x133mm	663lm	381lm	● 2700K	704622.B.P.C
COB LED	6W	∅130x133mm	708lm	421lm	● 3000K	704623.B.P.C
COB LED	6W	∅130x133mm	753lm	464lm	● 4000K	704624.B.P.C
COB LED	6W	∅130x133mm	782lm	509lm	● 5000K	704625.B.P.C
COB LED	12W	∅160x153mm	1327lm	762lm	● 2700K	704632.B.P.C
COB LED	12W	∅160x153mm	1416lm	843lm	● 3000K	704633.B.P.C
COB LED	12W	∅160x153mm	1505lm	927lm	● 4000K	704634.B.P.C
COB LED	12W	∅160x153mm	1563lm	1018lm	● 5000K	704635.B.P.C

Beam Angle: B(Asymmetric)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1 -Black)




7046

Downlight Recessed. Ambience/UGR

INGROUND series

IP67

Architectural OUTDOOR

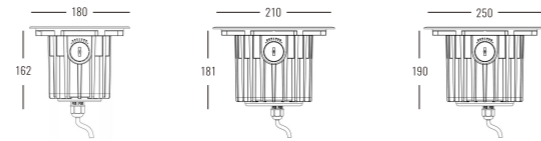

OSRAM 50,000hrs	COB	LED LM80	Adi	Ra >90	UGR <19	IP67	5 years Warranty	AC220-240V DC12/24V	CE	Stainless Steel +Aluminum	Asymmetric
--------------------	-----	-------------	-----	-----------	------------	------	------------------------	------------------------	----	------------------------------	------------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	20W	∅180x162mm	2211lm	1269lm	● 2700K	704642.B.P.C
COB LED	20W	∅180x162mm	2360lm	1404lm	● 3000K	704643.B.P.C
COB LED	20W	∅180x162mm	2509lm	1545lm	● 4000K	704644.B.P.C
COB LED	20W	∅180x162mm	2605lm	1696lm	● 5000K	704645.B.P.C
COB LED	25W	∅210x181mm	2764lm	1587lm	● 2700K	704652.B.P.C
COB LED	25W	∅210x181mm	2950lm	1755lm	● 3000K	704653.B.P.C
COB LED	25W	∅210x181mm	3136lm	1932lm	● 4000K	704654.B.P.C
COB LED	25W	∅210x181mm	3257lm	2120lm	● 5000K	704655.B.P.C
COB LED	36W	∅250x190mm	3980lm	2285lm	● 2700K	704662.B.P.C
COB LED	36W	∅250x190mm	4248lm	2528lm	● 3000K	704663.B.P.C
COB LED	36W	∅250x190mm	4516lm	2782lm	● 4000K	704664.B.P.C
COB LED	36W	∅250x190mm	4690lm	3053lm	● 5000K	704665.B.P.C

Beam Angle: B(Asymmetric)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1 - Black)



Black




7047

Downlight Recessed. Ambience/UGR

INGROUND series

IP67

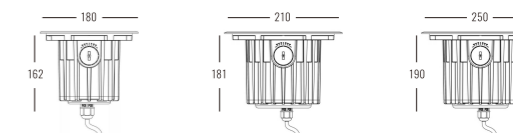

Adjustable Inground Light

Adjustable LED inground luminaires stands out for special housing design and high quality optical components.

The fixture features a 25-degree adjustable mechanism that allows for precise beam direction adjustments, either in a clockwise or anti-clockwise direction.



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	3W	∅180x162mm	323lm	181lm	● 2700K	704712.B.P.C
COB LED	3W	∅180x162mm	345lm	198lm	● 3000K	704713.B.P.C
COB LED	3W	∅180x162mm	367lm	218lm	● 4000K	704714.B.P.C
COB LED	3W	∅180x162mm	381lm	240lm	● 5000K	704715.B.P.C
COB LED	6W	∅210x181mm	647lm	362lm	● 2700K	704722.B.P.C
COB LED	6W	∅210x181mm	690lm	396lm	● 3000K	704723.B.P.C
COB LED	6W	∅210x181mm	733lm	436lm	● 4000K	704724.B.P.C
COB LED	6W	∅210x181mm	762lm	480lm	● 5000K	704725.B.P.C
COB LED	12W	∅250x190mm	1293lm	724lm	● 2700K	704732.B.P.C
COB LED	12W	∅250x190mm	1380lm	792lm	● 3000K	704733.B.P.C
COB LED	12W	∅250x190mm	1467lm	873lm	● 4000K	704734.B.P.C
COB LED	12W	∅250x190mm	1524lm	960lm	● 5000K	704735.B.P.C

Beam Angle: B(1-3° 2-5° 3-8° 4-12° 5-15° 6-25° 7-40° 8-60° 9-10° 45° 10-20° 65°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1 -Black)



7047


Downlight Recessed. Ambience/UGR

INGROUND series

IP67



Architectural OUTDOOR

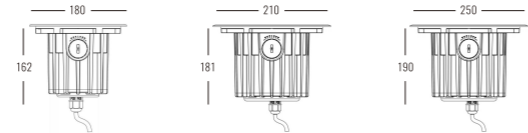

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	18W	Ø180x162mm	1940lm	1086lm	● 2700K	704742.B.P.C
COB LED	18W	Ø180x162mm	2070lm	1188lm	● 3000K	704743.B.P.C
COB LED	18W	Ø180x162mm	2200lm	1309lm	○ 4000K	704744.B.P.C
COB LED	18W	Ø180x162mm	2285lm	1440lm	○ 5000K	704745.B.P.C
COB LED	27W	Ø210x181mm	2909lm	1629lm	● 2700K	704752.B.P.C
COB LED	27W	Ø210x181mm	3105lm	1782lm	● 3000K	704753.B.P.C
COB LED	27W	Ø210x181mm	3301lm	1964lm	○ 4000K	704754.B.P.C
COB LED	27W	Ø210x181mm	3428lm	2160lm	○ 5000K	704755.B.P.C
COB LED	36W	Ø250x190mm	3879lm	2172lm	● 2700K	704762.B.P.C
COB LED	36W	Ø250x190mm	4140lm	2376lm	● 3000K	704763.B.P.C
COB LED	36W	Ø250x190mm	4401lm	2618lm	○ 4000K	704764.B.P.C
COB LED	36W	Ø250x190mm	4571lm	2879lm	○ 5000K	704765.B.P.C

Beam Angle: B(1-3° 2-5° 3-8° 4-12° 5-15° 6-25° 7-40° 8-60° 9-10° 45° 10-20° 65°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black)



Black

POCHÉ

7048

Downlight Recessed. Ambience/UGR



INGROUND series

IP67



Adjustable COB Inground Light

The fixture features a 25-degree adjustable mechanism that allows for precise beam direction adjustments, either in a clockwise or anti-clockwise direction.

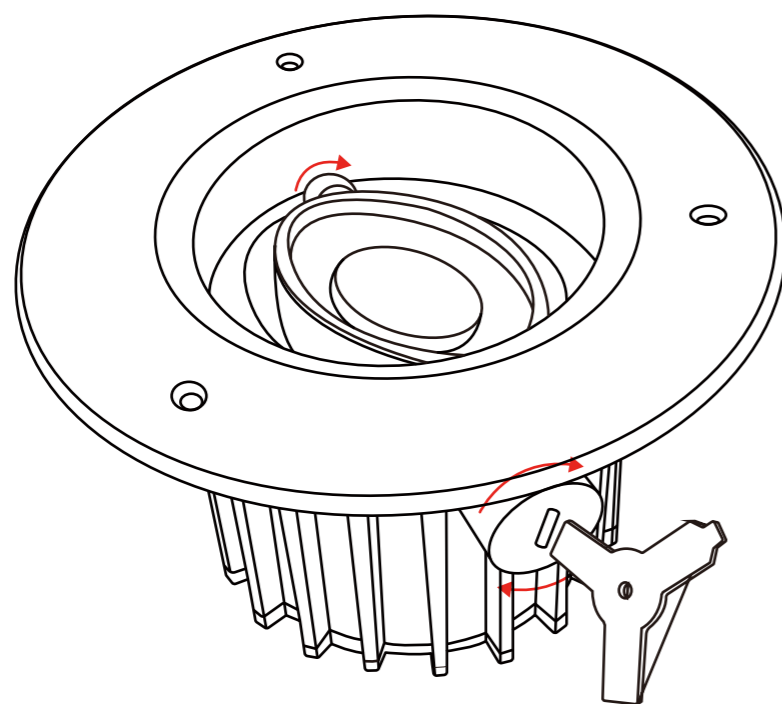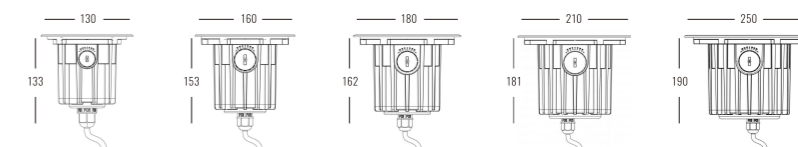

OSRAM 50,000hrs |
 COB |
 LED LM80 |
 A₀ |
 R_a >90 |
 UGR <19 |
 IP67 |
 5 years Warranty |
 AC220-240V DC12/24V |
 CE |
 Stainless Steel +Aluminum |
 18° 24° 38° 48° 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	6W	∅130x133mm	663lm	376lm	● 2700K	704812.B.P.C
COB LED	6W	∅130x133mm	708lm	411lm	● 3000K	704813.B.P.C
COB LED	6W	∅130x133mm	753lm	448lm	● 4000K	704814.B.P.C
COB LED	6W	∅130x133mm	782lm	492lm	● 5000K	704815.B.P.C
COB LED	12W	∅160x153mm	1327lm	752lm	● 2700K	704822.B.P.C
COB LED	12W	∅160x153mm	1416lm	823lm	● 3000K	704823.B.P.C
COB LED	12W	∅160x153mm	1505lm	896lm	● 4000K	704824.B.P.C
COB LED	12W	∅160x153mm	1563lm	985lm	● 5000K	704825.B.P.C
COB LED	20W	∅180x162mm	2211lm	1254lm	● 2700K	704832.B.P.C
COB LED	20W	∅180x162mm	2360lm	1371lm	● 3000K	704833.B.P.C
COB LED	20W	∅180x162mm	2509lm	1493lm	● 4000K	704834.B.P.C
COB LED	20W	∅180x162mm	2605lm	1641lm	● 5000K	704835.B.P.C
COB LED	25W	∅210x181mm	2764lm	1567lm	● 2700K	704842.B.P.C
COB LED	25W	∅210x181mm	2950lm	1714lm	● 3000K	704843.B.P.C
COB LED	25W	∅210x181mm	3136lm	1866lm	● 4000K	704844.B.P.C
COB LED	25W	∅210x181mm	3257lm	2052lm	● 5000K	704845.B.P.C
COB LED	36W	∅250x190mm	3980lm	2257lm	● 2700K	704852.B.P.C
COB LED	36W	∅250x190mm	4248lm	2468lm	● 3000K	704853.B.P.C
COB LED	36W	∅250x190mm	4516lm	2687lm	● 4000K	704854.B.P.C
COB LED	36W	∅250x190mm	4690lm	2955lm	● 5000K	704855.B.P.C

Beam Angle: B(1-18° 2-24° 3-38° 4-60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black)






7049

Downlight Recessed. Ambience/UGR

INGROUND series

IP67

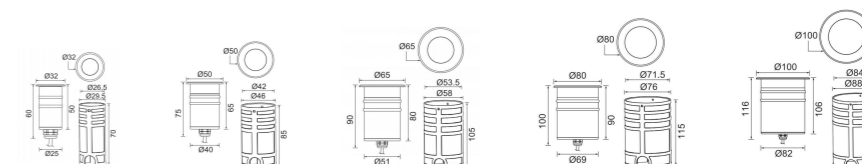

OSRAM 50,000hrs	COB	LED LM80		Ra >90	UGR <19	IP67		AC220-240V DC12/24V		Stainless Steel +Aluminum	
---------------------------	-----	-------------	--	-----------	------------	-------------	--	------------------------	--	------------------------------	--

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2W	ø32x60mm	225lm	120lm	● 2700K	704912.B.P.C
COB LED	2W	ø32x60mm	240lm	131lm	● 3000K	704913.B.P.C
COB LED	2W	ø32x60mm	255lm	146lm	● 4000K	704914.B.P.C
COB LED	2W	ø32x60mm	265lm	158lm	● 5000K	704915.B.P.C
COB LED	4.5W	ø50x75mm	506lm	269lm	● 2700K	704922.B.P.C
COB LED	4.5W	ø50x75mm	540lm	295lm	● 3000K	704923.B.P.C
COB LED	4.5W	ø50x75mm	574lm	329lm	● 4000K	704924.B.P.C
COB LED	4.5W	ø50x75mm	596lm	355lm	● 5000K	704925.B.P.C
COB LED	6.5W	ø65x90mm	731lm	389lm	● 2700K	704932.B.P.C
COB LED	6.5W	ø65x90mm	780lm	426lm	● 3000K	704933.B.P.C
COB LED	6.5W	ø65x90mm	829lm	476lm	● 4000K	704934.B.P.C
COB LED	6.5W	ø65x90mm	861lm	512lm	● 5000K	704935.B.P.C
COB LED	10W	ø80x100mm	1124lm	598lm	● 2700K	704942.B.P.C
COB LED	10W	ø80x100mm	1200lm	655lm	● 3000K	704943.B.P.C
COB LED	10W	ø80x100mm	1276lm	732lm	● 4000K	704944.B.P.C
COB LED	10W	ø80x100mm	1325lm	788lm	● 5000K	704945.B.P.C
COB LED	15W	ø100x116mm	1687lm	897lm	● 2700K	704952.B.P.C
COB LED	15W	ø100x116mm	1800lm	983lm	● 3000K	704953.B.P.C
COB LED	15W	ø100x116mm	1913lm	1098lm	● 4000K	704954.B.P.C
COB LED	15W	ø100x116mm	1987lm	1182lm	● 5000K	704955.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-55°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1 -Black)

Für allgemeine Anfragen, technischen Support oder Informationen zur Treiberkompatibilität - www.pochelicht.de.
For general enquiries, technical support, or driver compatibility details - www.pochelicht.de.



Black


7050

Downlight Recessed. Ambience/UGR

INGROUND series



Architectural OUTDOOR

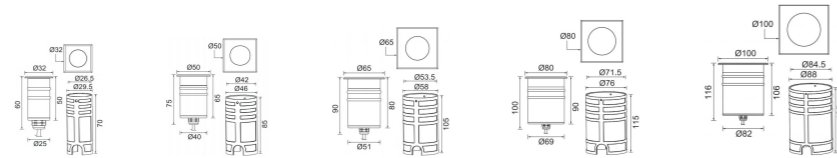


7051

Downlight Recessed. Ambience/UGR

INGROUND series



Architectural OUTDOOR

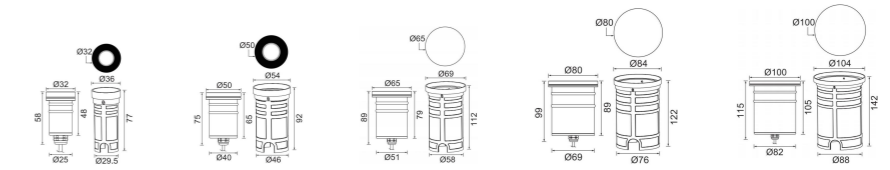

OSRAM 50,000hrs COB LED LM80 Fixed Ra >90 UGR <19 IP67 5 years Warranty AC220-240V DC12/24V CE Stainless Steel +Aluminum 12° 24° 36° 55°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2W	∅32x60mm	221lm	118lm	● 2700K	705012.B.P.C
COB LED	2W	∅32x60mm	236lm	129lm	● 3000K	705013.B.P.C
COB LED	2W	∅32x60mm	251lm	144lm	● 4000K	705014.B.P.C
COB LED	2W	∅32x60mm	261lm	155lm	● 5000K	705015.B.P.C
COB LED	4.5W	∅50x75mm	498lm	265lm	● 2700K	705022.B.P.C
COB LED	4.5W	∅50x75mm	531lm	290lm	● 3000K	705023.B.P.C
COB LED	4.5W	∅50x75mm	564lm	324lm	● 4000K	705024.B.P.C
COB LED	4.5W	∅50x75mm	586lm	349lm	● 5000K	705025.B.P.C
COB LED	6.5W	∅65x90mm	719lm	382lm	● 2700K	705032.B.P.C
COB LED	6.5W	∅65x90mm	767lm	419lm	● 3000K	705033.B.P.C
COB LED	6.5W	∅65x90mm	815lm	468lm	● 4000K	705034.B.P.C
COB LED	6.5W	∅65x90mm	847lm	504lm	● 5000K	705035.B.P.C
COB LED	10W	∅80x100mm	1106lm	588lm	● 2700K	705042.B.P.C
COB LED	10W	∅80x100mm	1180lm	644lm	● 3000K	705043.B.P.C
COB LED	10W	∅80x100mm	1254lm	720lm	● 4000K	705044.B.P.C
COB LED	10W	∅80x100mm	1303lm	775lm	● 5000K	705045.B.P.C
COB LED	15W	∅100x116mm	1658lm	882lm	● 2700K	705052.B.P.C
COB LED	15W	∅100x116mm	1770lm	966lm	● 3000K	705053.B.P.C
COB LED	15W	∅100x116mm	1882lm	1080lm	● 4000K	705054.B.P.C
COB LED	15W	∅100x116mm	1954lm	1163lm	● 5000K	705055.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-55°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black)



Für allgemeine Anfragen, technischen Support oder Informationen zur Treiberkompatibilität – www.pochelicht.de.
For general enquiries, technical support, or driver compatibility details – www.pochelicht.de.

OSRAM 50,000hrs COB LED LM80 Fixed Ra >90 UGR <19 IP67 5 years Warranty AC220-240V DC12/24V CE Stainless Steel +Aluminum 12° 24° 36° 55°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2W	∅32x58mm	216lm	115lm	● 2700K	705112.B.P.C
COB LED	2W	∅32x58mm	230lm	126lm	● 3000K	705113.B.P.C
COB LED	2W	∅32x58mm	244lm	140lm	● 4000K	705114.B.P.C
COB LED	2W	∅32x58mm	254lm	151lm	● 5000K	705115.B.P.C
COB LED	4.5W	∅50x75mm	485lm	258lm	● 2700K	705122.B.P.C
COB LED	4.5W	∅50x75mm	518lm	283lm	● 3000K	705123.B.P.C
COB LED	4.5W	∅50x75mm	550lm	316lm	● 4000K	705124.B.P.C
COB LED	4.5W	∅50x75mm	571lm	340lm	● 5000K	705125.B.P.C
COB LED	6.5W	∅65x89mm	700lm	373lm	● 2700K	705132.B.P.C
COB LED	6.5W	∅65x89mm	748lm	408lm	● 3000K	705133.B.P.C
COB LED	6.5W	∅65x89mm	795lm	456lm	● 4000K	705134.B.P.C
COB LED	6.5W	∅65x89mm	825lm	491lm	● 5000K	705135.B.P.C
COB LED	10W	∅80x99mm	1078lm	573lm	● 2700K	705142.B.P.C
COB LED	10W	∅80x99mm	1150lm	628lm	● 3000K	705143.B.P.C
COB LED	10W	∅80x99mm	1222lm	702lm	● 4000K	705144.B.P.C
COB LED	10W	∅80x99mm	1270lm	755lm	● 5000K	705145.B.P.C
COB LED	15W	∅100x115mm	1616lm	860lm	● 2700K	705152.B.P.C
COB LED	15W	∅100x115mm	1725lm	942lm	● 3000K	705153.B.P.C
COB LED	15W	∅100x115mm	1834lm	1053lm	● 4000K	705154.B.P.C
COB LED	15W	∅100x115mm	1904lm	1133lm	● 5000K	705155.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-55°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black)



Für allgemeine Anfragen, technischen Support oder Informationen zur Treiberkompatibilität – www.pochelicht.de.
For general enquiries, technical support, or driver compatibility details – www.pochelicht.de.


7052

Architectural OUTDOOR

Downlight Recessed. Ambience/UGR

INGROUND series

IP67

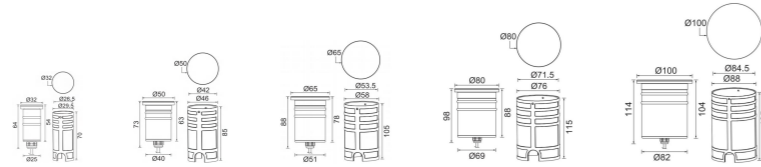

OSRAM | COB | LED LM80 | Fixed | Ra >90 | UGR <19 | IP67 | 5 years Warranty | AC220-240V DC12/24V | CE | Stainless Steel + Aluminum | 360°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2W	∅32x64mm	206lm	110lm	● 2700K	705212.B.P.C
COB LED	2W	∅32x64mm	220lm	120lm	● 3000K	705213.B.P.C
COB LED	2W	∅32x64mm	234lm	134lm	○ 4000K	705214.B.P.C
COB LED	2W	∅32x64mm	243lm	145lm	○ 5000K	705215.B.P.C
COB LED	4.5W	∅50x73mm	464lm	247lm	● 2700K	705222.B.P.C
COB LED	4.5W	∅50x73mm	495lm	270lm	● 3000K	705223.B.P.C
COB LED	4.5W	∅50x73mm	526lm	302lm	○ 4000K	705224.B.P.C
COB LED	4.5W	∅50x73mm	546lm	325lm	○ 5000K	705225.B.P.C
COB LED	6.5W	∅65x88mm	670lm	356lm	● 2700K	705232.B.P.C
COB LED	6.5W	∅65x88mm	715lm	390lm	● 3000K	705233.B.P.C
COB LED	6.5W	∅65x88mm	760lm	436lm	○ 4000K	705234.B.P.C
COB LED	6.5W	∅65x88mm	789lm	470lm	○ 5000K	705235.B.P.C
COB LED	10W	∅80x98mm	1031lm	548lm	● 2700K	705242.B.P.C
COB LED	10W	∅80x98mm	1100lm	601lm	● 3000K	705243.B.P.C
COB LED	10W	∅80x98mm	1169lm	671lm	○ 4000K	705244.B.P.C
COB LED	10W	∅80x98mm	1214lm	723lm	○ 5000K	705245.B.P.C
COB LED	15W	∅100x114mm	1546lm	822lm	● 2700K	705252.B.P.C
COB LED	15W	∅100x114mm	1650lm	901lm	● 3000K	705253.B.P.C
COB LED	15W	∅100x114mm	1754lm	1007lm	○ 4000K	705254.B.P.C
COB LED	15W	∅100x114mm	1822lm	1084lm	○ 5000K	705255.B.P.C

Beam Angle: B(1-360°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1 -Black)



Für allgemeine Anfragen, technischen Support oder Informationen zur Treiberkompatibilität – www.pochelicht.de.
For general enquiries, technical support, or driver compatibility details – www.pochelicht.de.

7053


Downlight Recessed. Ambience/UGR

INGROUND series

IP67



Architectural OUTDOOR



OSRAM 50,000hrs | COB | LED LM80 | Fixed | Ra >90 | UGR <19 | IP67 | 5 years Warranty | AC220-240V DC12/24V | CE | Stainless Steel +Aluminum | 10° 18° 24° 38°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	2W	∅70x86mm	28lm	25lm	● 2700K	705312.B.P.C
SMD LED	2W	∅70x86mm	30lm	27lm	● 3000K	705313.B.P.C
SMD LED	2W	∅70x86mm	32lm	29lm	○ 4000K	705314.B.P.C
SMD LED	2W	∅70x86mm	33lm	30lm	○ 5000K	705315.B.P.C
SMD LED	2W	∅70x86mm	20lm	18lm	● RGB	705316.B.4.C

Beam Angle: B(1-WAY 2-WAY 3-WAY)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black)



Black

7054


Downlight Recessed. Ambience/UGR

INGROUND series

IP67



Architectural OUTDOOR



OSRAM 50,000hrs | COB | LED LM80 | Fixed | Ra >90 | UGR <19 | IP67 | 5 years Warranty | AC220-240V DC12/24V | CE | Stainless Steel +Aluminum | 10° 18° 24° 38°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	6W	∅116x49mm	478lm	151lm	● 2700K	705412.B.P.C
COB LED	6W	∅116x49mm	510lm	171lm	● 3000K	705413.B.P.C
COB LED	6W	∅116x49mm	542lm	190lm	○ 4000K	705414.B.P.C
COB LED	6W	∅116x49mm	563lm	205lm	○ 5000K	705415.B.P.C
COB LED	6W	∅116x49mm	280lm	135lm	● RGB	705416.B.4.C

Beam Angle: B(1-WAY 2-WAY 3-WAY)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black)





Black

7055

Downlight Recessed. Ambience/UGR

INGROUND series

IP67



Linear LED Inground Light

Linear underground light is good waterproof and dustproof performance, can be in damp or dust more work environment

Range of linear In-Ground walk over luminaires are developed for elegant grazing light effect. These luminaires perfectly suits for building facades, pathways & wall grazing

OSRAM 50,000hrs
COB
LED LM80
Fixed
Ra >90
UGR <19
IP67
5 years Warranty
AC220-240V DC12/24V
CE
Stainless Steel +Aluminum
10°
18°
24°
38°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	Ø173x54.5mm	956lm	301lm	● 2700K	705512.B.P.C
COB LED	12W	Ø173x54.5mm	1020lm	343lm	● 3000K	705513.B.P.C
COB LED	12W	Ø173x54.5mm	1084lm	379lm	○ 4000K	705514.B.P.C
COB LED	12W	Ø173x54.5mm	1126lm	410lm	○ 5000K	705515.B.P.C
COB LED	12W	Ø173x54.5mm	560lm	260lm	● RGB	705516.B.4.C

Beam Angle: B(1-WAY 2-WAY 3-WAY)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black)



Black

Dimmable White



RGBW



Precise light distribution




7056

Downlight Recessed. Ambience/UGR

INGROUND series

IP67

Architectural OUTDOOR





7057

Downlight Recessed. Ambience/UGR

INGROUND series

IP67

Architectural OUTDOOR

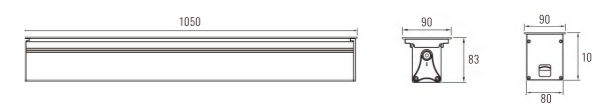

OSRAM 50,000hrs COB LED LM80 Fixed Ra >90 UGR <19 IP67 5 years Warranty AC220-240V CE Stainless Steel + Aluminum 10° 15° 30° 45° 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	18W	ø1030x75x61mm	2277lm	1211lm	● 2700K	705612.B.P.C
SMD LED	18W	ø1030x75x61mm	2430lm	1327lm	● 3000K	705613.B.P.C
SMD LED	18W	ø1030x75x61mm	2583lm	1483lm	○ 4000K	705614.B.P.C
SMD LED	18W	ø1030x75x61mm	2683lm	1596lm	○ 5000K	705615.B.P.C
SMD LED	24W	ø1030x75x61mm	3036lm	1615lm	● 2700K	705622.B.P.C
SMD LED	24W	ø1030x75x61mm	3240lm	1769lm	● 3000K	705623.B.P.C
SMD LED	24W	ø1030x75x61mm	3444lm	1977lm	○ 4000K	705624.B.P.C
SMD LED	24W	ø1030x75x61mm	3577lm	2128lm	○ 5000K	705625.B.P.C
SMD LED	36W	ø1030x75x84mm	4554lm	2423lm	● 2700K	705632.B.P.C
SMD LED	36W	ø1030x75x84mm	4860lm	2654lm	● 3000K	705633.B.P.C
SMD LED	36W	ø1030x75x84mm	5166lm	2965lm	○ 4000K	705634.B.P.C
SMD LED	36W	ø1030x75x84mm	5365lm	3192lm	○ 5000K	705635.B.P.C
SMD LED	48W	ø1030x75x84mm	6072lm	3230lm	● 2700K	705642.B.P.C
SMD LED	48W	ø1030x75x84mm	6480lm	3538lm	● 3000K	705643.B.P.C
SMD LED	48W	ø1030x75x84mm	6888lm	3954lm	○ 4000K	705644.B.P.C
SMD LED	48W	ø1030x75x84mm	7154lm	4257lm	○ 5000K	705645.B.P.C

Beam Angle: B(1-10° 2-15° 3-30° 4-45° 5-60° 6-10°60° 7-18°45° Asymmetric)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1 -Black)



Black

OSRAM 50,000hrs SMD LED LM80 Fixed Ra >90 UGR <19 IP67 5 years Warranty AC100-250V DC24V CE Stainless Steel + Aluminum 10° 15° 30° 45° 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	18W	ø1050x90x83mm	2193lm	1166lm	● 2700K	705712.B.P.C
SMD LED	18W	ø1050x90x83mm	2340lm	1278lm	● 3000K	705713.B.P.C
SMD LED	18W	ø1050x90x83mm	2487lm	1428lm	○ 4000K	705714.B.P.C
SMD LED	18W	ø1050x90x83mm	2583lm	1537lm	○ 5000K	705715.B.P.C
SMD LED	24W	ø1050x90x83mm	2923lm	1555lm	● 2700K	705722.B.P.C
SMD LED	24W	ø1050x90x83mm	3120m	1704lm	● 3000K	705723.B.P.C
SMD LED	24W	ø1050x90x83mm	3317m	1904lm	○ 4000K	705724.B.P.C
SMD LED	24W	ø1050x90x83mm	3444lm	2049lm	○ 5000K	705725.B.P.C
SMD LED	36W	ø1050x90x83mm	4385lm	2333lm	● 2700K	705732.B.P.C
SMD LED	36W	ø1050x90x83mm	4680lm	2555lm	● 3000K	705733.B.P.C
SMD LED	36W	ø1050x90x83mm	4975lm	2856lm	○ 4000K	705734.B.P.C
SMD LED	36W	ø1050x90x83mm	5167lm	3074lm	○ 5000K	705735.B.P.C
SMD LED	36W	ø1050x90x83mm	1512lm	1361lm	● RGB	70574RGB.B.P.C
SMD LED	48W	ø1050x90x83mm	2256lm	2030lm	● RGBW	70575RGBW.B.P.C

Beam Angle: B(1-10° 2-15° 3-30° 4-45° 5-60° 6-20°45° 7-10°60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1 -Black)




Black

7058

Downlight Recessed. Ambience/UGR

INGROUND series


IP67

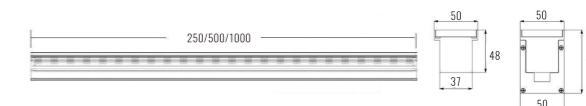

Frameless Linear Inground Light

Frameless linear inground light used original structural design, the overall appearance is simple, exquisite and beautiful.

The linear buried lamp is closely integrated with the ground or wall through the embedded parts.

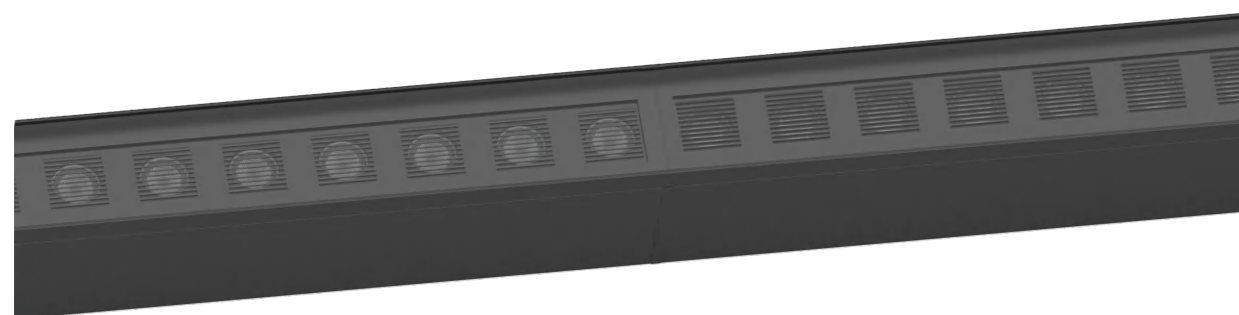

Linealuce Mini

A constant flux of up to 27 metres of light with a single power line.



OSRAM 50,000hrs SMD LED LM80 Fixed Ra >90 UGR <19 IP67 5 years Warranty AC100-250V DC24V CE Stainless Steel +Aluminum 110°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	18W	∅250x50x48mm	2361lm	1256lm	● 2700K	705812.B.P.C
SMD LED	18W	∅250x50x48mm	2520lm	1376lm	● 3000K	705813.B.P.C
SMD LED	18W	∅250x50x48mm	2679lm	1538lm	○ 4000K	705814.B.P.C
SMD LED	18W	∅250x50x48mm	2782lm	1655lm	○ 5000K	705815.B.P.C
SMD LED	24W	∅250x50x71.5mm	3148lm	1675lm	● 2700K	705822.B.P.C
SMD LED	24W	∅250x50x71.5mm	3360lm	1835lm	● 3000K	705823.B.P.C
SMD LED	24W	∅250x50x71.5mm	3572lm	2050lm	○ 4000K	705824.B.P.C
SMD LED	24W	∅250x50x71.5mm	3709lm	2207lm	○ 5000K	705825.B.P.C
SMD LED	36W	∅500x50x71.5mm	4722lm	2489lm	● 2700K	705832.B.P.C
SMD LED	36W	∅500x50x71.5mm	5040lm	2657lm	● 3000K	705833.B.P.C
SMD LED	36W	∅500x50x71.5mm	5358lm	2824lm	○ 4000K	705834.B.P.C
SMD LED	36W	∅500x50x71.5mm	5564lm	2933lm	○ 5000K	705835.B.P.C
SMD LED	48W	∅1000x50x71.5mm	6297lm	3350lm	● 2700K	705842.B.P.C
SMD LED	48W	∅1000x50x71.5mm	6720lm	3669lm	● 3000K	705843.B.P.C
SMD LED	48W	∅1000x50x71.5mm	7143lm	4100lm	○ 4000K	705844.B.P.C
SMD LED	48W	∅1000x50x71.5mm	7419lm	4414lm	○ 5000K	705845.B.P.C

Beam Angle: B(1-110°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black)



Black



POCHE



POCHE

Professional waterproofing technology, IP67 waterproof.

The casing is made of 316 stainless steel/aluminum material, which is rainproof, corrosion-resistant and resistant to impact.

The aluminum casing has excellent heat conductivity and good heat dissipation performance.

7059


Downlight Recessed. Ambience/UGR

INGROUND series

IP67



Architectural OUTDOOR



OSRAM 50,000hrs | COB | LED LM80 | Fixed | Ra >90 | UGR <19 | IP67 | 5 years Warranty | AC220-240V | CE | Stainless Steel + Aluminum | 10° 15° 30° 45° 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	ø302x302x69mm	843lm	759lm	● 2700K	705912.B.P.C
COB LED	12W	ø302x302x69mm	900lm	810lm	● 3000K	705913.B.P.C
COB LED	12W	ø302x302x69mm	957lm	861lm	● 4000K	705914.B.P.C
COB LED	12W	ø302x302x69mm	994lm	894lm	● 5000K	705915.B.P.C
COB LED	15W	ø302x302x69mm	375lm	338lm	● RGB	705916.B.4.C
COB LED	21W	ø302x302x69mm	588lm	529lm	● RGBW	705917.B.5.C

Beam Angle: B(1-8° 2-12° 3-25° 4-40° 5-60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black)



Black

7060


Downlight Recessed. Ambience/UGR

INGROUND series

IP67



Architectural OUTDOOR



OSRAM 50,000hrs | COB | LED LM80 | Fixed | Ra >90 | UGR <19 | IP67 | 5 years Warranty | AC220-240V DC12/24V | CE | Stainless Steel + Aluminum | 8° 12° 25° 40° 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	18W	ø500x369x69mm	1265lm	1138lm	● 2700K	706012.B.P.C
COB LED	18W	ø500x369x69mm	1350lm	1215lm	● 3000K	706013.B.P.C
COB LED	18W	ø500x369x69mm	1435lm	1292lm	● 4000K	706014.B.P.C
COB LED	18W	ø500x369x69mm	1490lm	1341lm	● 5000K	706015.B.P.C
COB LED	22.5W	ø500x369x69mm	743lm	668lm	● RGB	706016.B.4.C
COB LED	31.5W	ø500x369x69mm	1103lm	992lm	● RGBW	706017.B.5.C

Beam Angle: B(1-8° 2-12° 3-25° 4-40° 5-60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black)



Black