

LANDSCAPE LIGHT



IP65

LANDSCAPE 7060
6W
P.1



IP65

LANDSCAPE 7061
12W
P.2



IP65

LANDSCAPE 7062
15W
P.3



IP65

LANDSCAPE 7063
10W
P.4



IP65

LANDSCAPE 7064
10W
P.6



IP65

LANDSCAPE 7065
7W
P.8



IP65

LANDSCAPE 7066
12W
P.10




IP65

LANDSCAPE 7067
14W
P.11




IP65

LANDSCAPE 7068
5W
P.12



IP65

LANDSCAPE 7069
10W
P.13



IP65

LANDSCAPE 7070
20W
P.14



IP65

LANDSCAPE 7067
100W
P.15



IP65

LANDSCAPE 7068
200W
P.16


7060

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65

ArchitecturalOUTDOOR




OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP65	5 years Warranty	AC220-240V 50/60Hz	CE	Die-cast Aluminum Heatsink	12° 24° 36° 60°
--------------------	-----	-------------	-------	-----------	------------	------	---------------------	-----------------------	----	-------------------------------	-----------------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	6W	∅105x800mm	506lm	319lm	● 2700K	706012.B.P.C
SMD LED	6W	∅105x800mm	540lm	340lm	● 3000K	706013.B.P.C
SMD LED	6W	∅105x800mm	574lm	362lm	● 4000K	706014.B.P.C
SMD LED	6W	∅105x800mm	596lm	376lm	● 5000K	706015.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)



Für allgemeine Anfragen, technischen Support oder Informationen zur Treiberkompatibilität – www.pochelicht.de.
For general enquiries, technical support, or driver compatibility details – www.pochelicht.de.


7061

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65

ArchitecturalOUTDOOR




OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >80	UGR <19	IP65	5 years Warranty	AC100-277V 50/60Hz	CE	Die-cast Aluminum Heatsink	15° 30° 60° 120° 140°
--------------------	-----	-------------	-------	-----------	------------	------	---------------------	-----------------------	----	-------------------------------	-----------------------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	12W	∅120x800mm	1012lm	638lm	● 2700K	706112.B.P.C
SMD LED	12W	∅120x800mm	1080lm	680lm	● 3000K	706113.B.P.C
SMD LED	12W	∅120x800mm	1148lm	723lm	● 4000K	706114.B.P.C
SMD LED	12W	∅120x800mm	1192lm	751lm	● 5000K	706115.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)

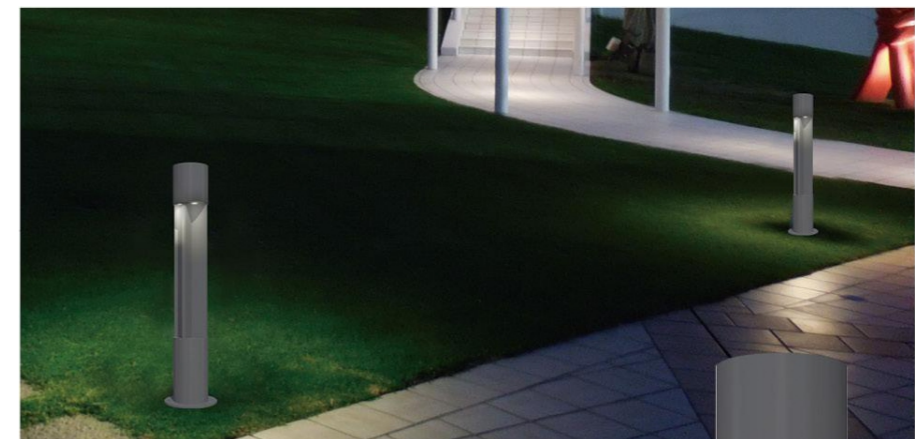

Für allgemeine Anfragen, technischen Support oder Informationen zur Treiberkompatibilität – www.pochelicht.de.
For general enquiries, technical support, or driver compatibility details – www.pochelicht.de.


7062

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65

ArchitecturalOUTDOOR




OSRAM 50,000hrs SMD LED LM80 Fixed Ra >90 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	15W	350x800mm	1455lm	1039lm	● 2700K	706212.B.P.C
SMD LED	15W	350x800mm	1553lm	1108lm	● 3000K	706213.B.P.C
SMD LED	15W	350x800mm	1650lm	1178lm	○ 4000K	706214.B.P.C
SMD LED	15W	350x800mm	1714lm	1224lm	○ 5000K	706215.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1 -Black 2 - Grey)





7063

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65

ArchitecturalOUTDOOR




OSRAM 50,000hrs SMD LED LM80 Fixed Ra >80 UGR <19 IP65 5 years Warranty AC100-277V 50/60Hz CE Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	10W	238x40x700mm	970lm	970lm	● 2700K	706312.B.P.C
SMD LED	10W	238x40x700mm	1035lm	1035lm	● 3000K	706313.B.P.C
SMD LED	10W	238x40x700mm	1100lm	1100lm	○ 4000K	706314.B.P.C
SMD LED	10W	238x40x700mm	1143lm	1143lm	○ 5000K	706315.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1 -Black 2 - Grey)





7064

Downlight Recessed. Ambience/UGR

LANDSCAPE series

IP65



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	10W	160x55x300mm	843lm	543lm	● 2700K	706412.B.P.C
SMD LED	10W	160x55x300mm	900lm	580lm	● 3000K	706413.B.P.C
SMD LED	10W	160x55x300mm	957lm	616lm	○ 4000K	706414.B.P.C
SMD LED	10W	160x55x300mm	994lm	640lm	○ 5000K	706415.B.P.C
SMD LED	10W	160x55x300mm	843lm	543lm	● 2700K	706422.B.P.C
SMD LED	10W	160x55x300mm	900lm	580lm	● 3000K	706423.B.P.C
SMD LED	10W	160x55x300mm	957lm	616lm	○ 4000K	706424.B.P.C
SMD LED	10W	160x55x300mm	994lm	640lm	○ 5000K	706425.B.P.C
SMD LED	10W	160x55x800mm	843lm	543lm	● 2700K	706432.B.P.C
SMD LED	10W	160x55x800mm	900lm	580lm	● 3000K	706433.B.P.C
SMD LED	10W	160x55x800mm	957lm	616lm	○ 4000K	706434.B.P.C
SMD LED	10W	160x55x800mm	994lm	640lm	○ 5000K	706435.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)




7065

Downlight Recessed. Ambience/UGR

LANDSCAPE series

IP65



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >80	UGR <19	IP65	5 Years Warranty	AC100-277V 50/60Hz	CE	Die-cast Aluminum Heatsink	15° 30° 60° 120° 140°
---------------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	-------------------------------	-----------------------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	7W	ø65x200x300mm	679lm	499lm	● 2700K	706512.B.P.C
SMD LED	7W	ø65x200x300mm	725lm	533lm	● 3000K	706513.B.P.C
SMD LED	7W	ø65x200x300mm	770lm	566lm	● 4000K	706514.B.P.C
SMD LED	7W	ø65x200x300mm	800lm	571lm	● 5000K	706515.B.P.C
SMD LED	7W	ø65x200x300mm	679lm	499lm	● 2700K	706522.B.P.C
SMD LED	7W	ø65x200x300mm	725lm	533lm	● 3000K	706523.B.P.C
SMD LED	7W	ø65x200x300mm	770lm	566lm	● 4000K	706524.B.P.C
SMD LED	7W	ø65x200x300mm	800lm	571lm	● 5000K	706525.B.P.C
SMD LED	7W	ø65x200x800mm	679lm	499lm	● 2700K	706532.B.P.C
SMD LED	7W	ø65x200x800mm	725lm	533lm	● 3000K	706533.B.P.C
SMD LED	7W	ø65x200x800mm	770lm	566lm	● 4000K	706534.B.P.C
SMD LED	7W	ø65x200x800mm	800lm	571lm	● 5000K	706535.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)






7066

Downlight Recessed. Ambience/UGR

LANDSCAPE series

IP65



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >80	UGR <19	IP65	5 years warranty	AC100-277V 50/60Hz	CE	Die-cast Aluminum Heatsink	15° 30° 60° 120° 140°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	-------------------------------	-----------------------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	12W	280x800mm	1063lm	781lm	● 2700K	706612.B.P.C
SMD LED	12W	280x800mm	1134lm	833lm	● 3000K	706613.B.P.C
SMD LED	12W	280x800mm	1205lm	932lm	○ 4000K	706614.B.P.C
SMD LED	12W	280x800mm	1252lm	920lm	○ 5000K	706615.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1 -Black 2 -Grey)



7067

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65



ArchitecturalOUTDOOR




OSRAM 50,000hrs SMD LED LM80 Fixed Ra >90 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	14W	ø60x600mm	1358lm	998lm	● 2700K	706712.B.P.C
SMD LED	14W	ø60x600mm	1449lm	1065lm	● 3000K	706713.B.P.C
SMD LED	14W	ø60x600mm	1540lm	1132lm	○ 4000K	706714.B.P.C
SMD LED	14W	ø60x600mm	1600lm	1176lm	○ 5000K	706715.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1 -Black 2 - Grey)



7068

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65



ArchitecturalOUTDOOR




OSRAM 50,000hrs SMD LED LM80 Fixed Ra >80 UGR <19 IP65 5 years Warranty AC100-277V 50/60Hz CE Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	5W	ø50x500mm	422lm	266lm	● 2700K	706812.B.P.C
SMD LED	5W	ø50x500mm	450lm	284lm	● 3000K	706813.B.P.C
SMD LED	5W	ø50x500mm	478lm	301lm	○ 4000K	706814.B.P.C
SMD LED	5W	ø50x500mm	497lm	313lm	○ 5000K	706815.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1 -Black 2 - Grey)



7069

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65



ArchitecturalOUTDOOR





OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >90 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 12° 24° 36° 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	10W	ø50x1000mm	843lm	531lm	● 2700K	706912.B.P.C
SMD LED	10W	ø50x1000mm	900lm	567lm	● 3000K	706913.B.P.C
SMD LED	10W	ø50x1000mm	957lm	603lm	○ 4000K	706914.B.P.C
SMD LED	10W	ø50x1000mm	994lm	626lm	○ 5000K	706915.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)

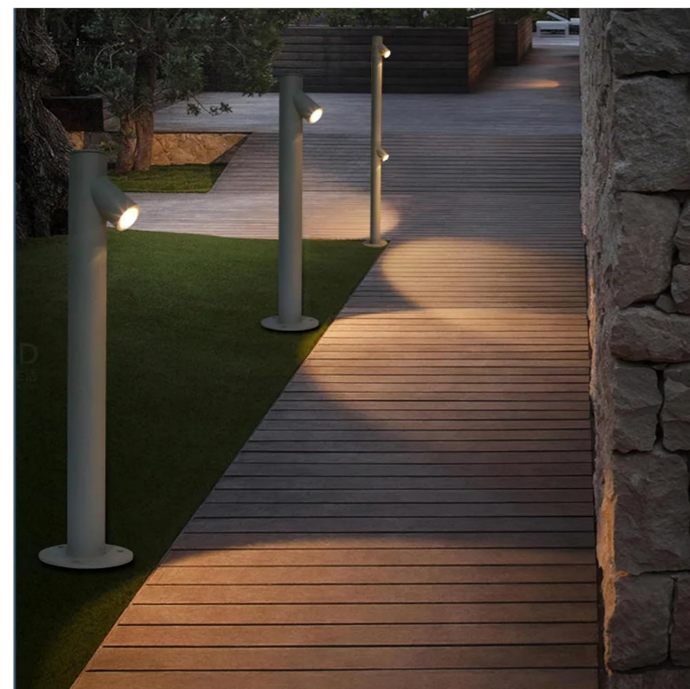

7070

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65



ArchitecturalOUTDOOR




OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >80 | UGR <19 | IP65 | 5 years Warranty | AC100-277V 50/60Hz | CE | Die-cast Aluminum Heatsink | 15° 30° 60° 120° 140°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	20W	ø50x1000mm	1687lm	1063lm	● 2700K	707012.B.P.C
SMD LED	20W	ø50x1000mm	1800lm	1134lm	● 3000K	707013.B.P.C
SMD LED	20W	ø50x1000mm	1913lm	1205lm	○ 4000K	707014.B.P.C
SMD LED	20W	ø50x1000mm	1987lm	1252lm	○ 5000K	707015.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)



7071

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65



ArchitecturalOUTDOOR





OSRAM | SMD | LED LM80 | | Ra >90 | UGR <19 | | | AC220-240V 50/60Hz | | Die-cast Aluminum Heatsink |

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	100W	680x3300mm	8433lm	6493lm	● 2700K	707112.B.P.C
SMD LED	100W	680x3300mm	10000lm	7700lm	● 3000K	707113.B.P.C
SMD LED	100W	680x3300mm	10630lm	8185lm	○ 4000K	707114.B.P.C
SMD LED	100W	680x3300mm	11040lm	8501lm	○ 5000K	707115.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)

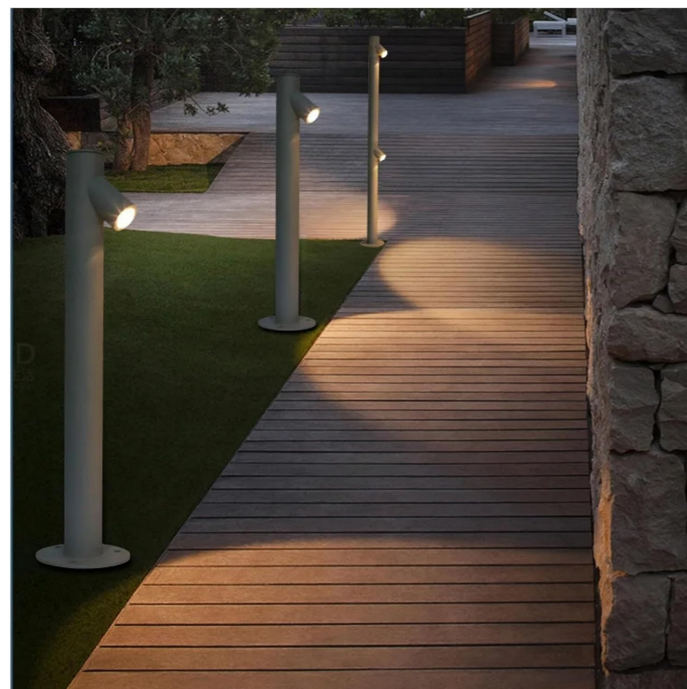

7072

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65



ArchitecturalOUTDOOR



OSRAM | SMD | LED LM80 | | Ra >80 | UGR <19 | | | AC100-277V 50/60Hz | | Die-cast Aluminum Heatsink |

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	200W	1200x3100mm	16866lm	12987lm	● 2700K	707212.B.P.C
SMD LED	200W	1200x3100mm	20000lm	15400lm	● 3000K	707213.B.P.C
SMD LED	200W	1200x3100mm	21260lm	16370lm	○ 4000K	707214.B.P.C
SMD LED	200W	1200x3100mm	22080lm	17002lm	○ 5000K	707215.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)

