

MAGNATIC



MAGNETIC-T 8010
10W/20W/25W/30W
P.3



MAGNETIC-T 8011
6W/12W/18W/24W
P.4



MAGNETIC-T 8012
6W/12W/18W
P.5



MAGNETIC-T 8013
7W/12W/18W/24W
P.6



MAGNETIC-T 8014
5W/12W/18W/24W
P.7



MAGNETIC-T 8015
7W/12W/18W
P.8



MAGNETIC-T 8016
7W/12W/18W
P.9



MAGNETIC 8030
1000mm/2000mm/3000mm
P.11



MAGNETIC 8031
1000mm/2000mm/3000mm
P.12



MAGNETIC 8032
1000mm/2000mm/3000mm
P.13



MAGNETIC 8033
1000mm/2000mm/3000mm
P.14

SLIM MAGNATIC



SLIM MAGNETIC 8022
1000mm/1500mm/3000mm
P.15



SLIM MAGNETIC 8023
1000mm/1500mm/3000mm
P.16



SLIM MAGNETIC 8017
8W/12W/16W
P.18



SLIM MAGNETIC 8018
5W/10W/15W/20W
P.20



SLIM MAGNETIC 8019
5W/10W
P.22



SLIM MAGNETIC 8020
3W/9W
P.25



SLIM MAGNETIC 8021
5W
P.26



SLIM MAGNETIC 8022
7W
P.27




SLIM MAGNETIC 8036
1000mm/1500mm/3000mm
P.28



SLIM MAGNETIC 8037
1000mm/2000mm/3000mm
P.29



SLIM MAGNETIC 8038
1000mm/2000mm/3000mm
P.30

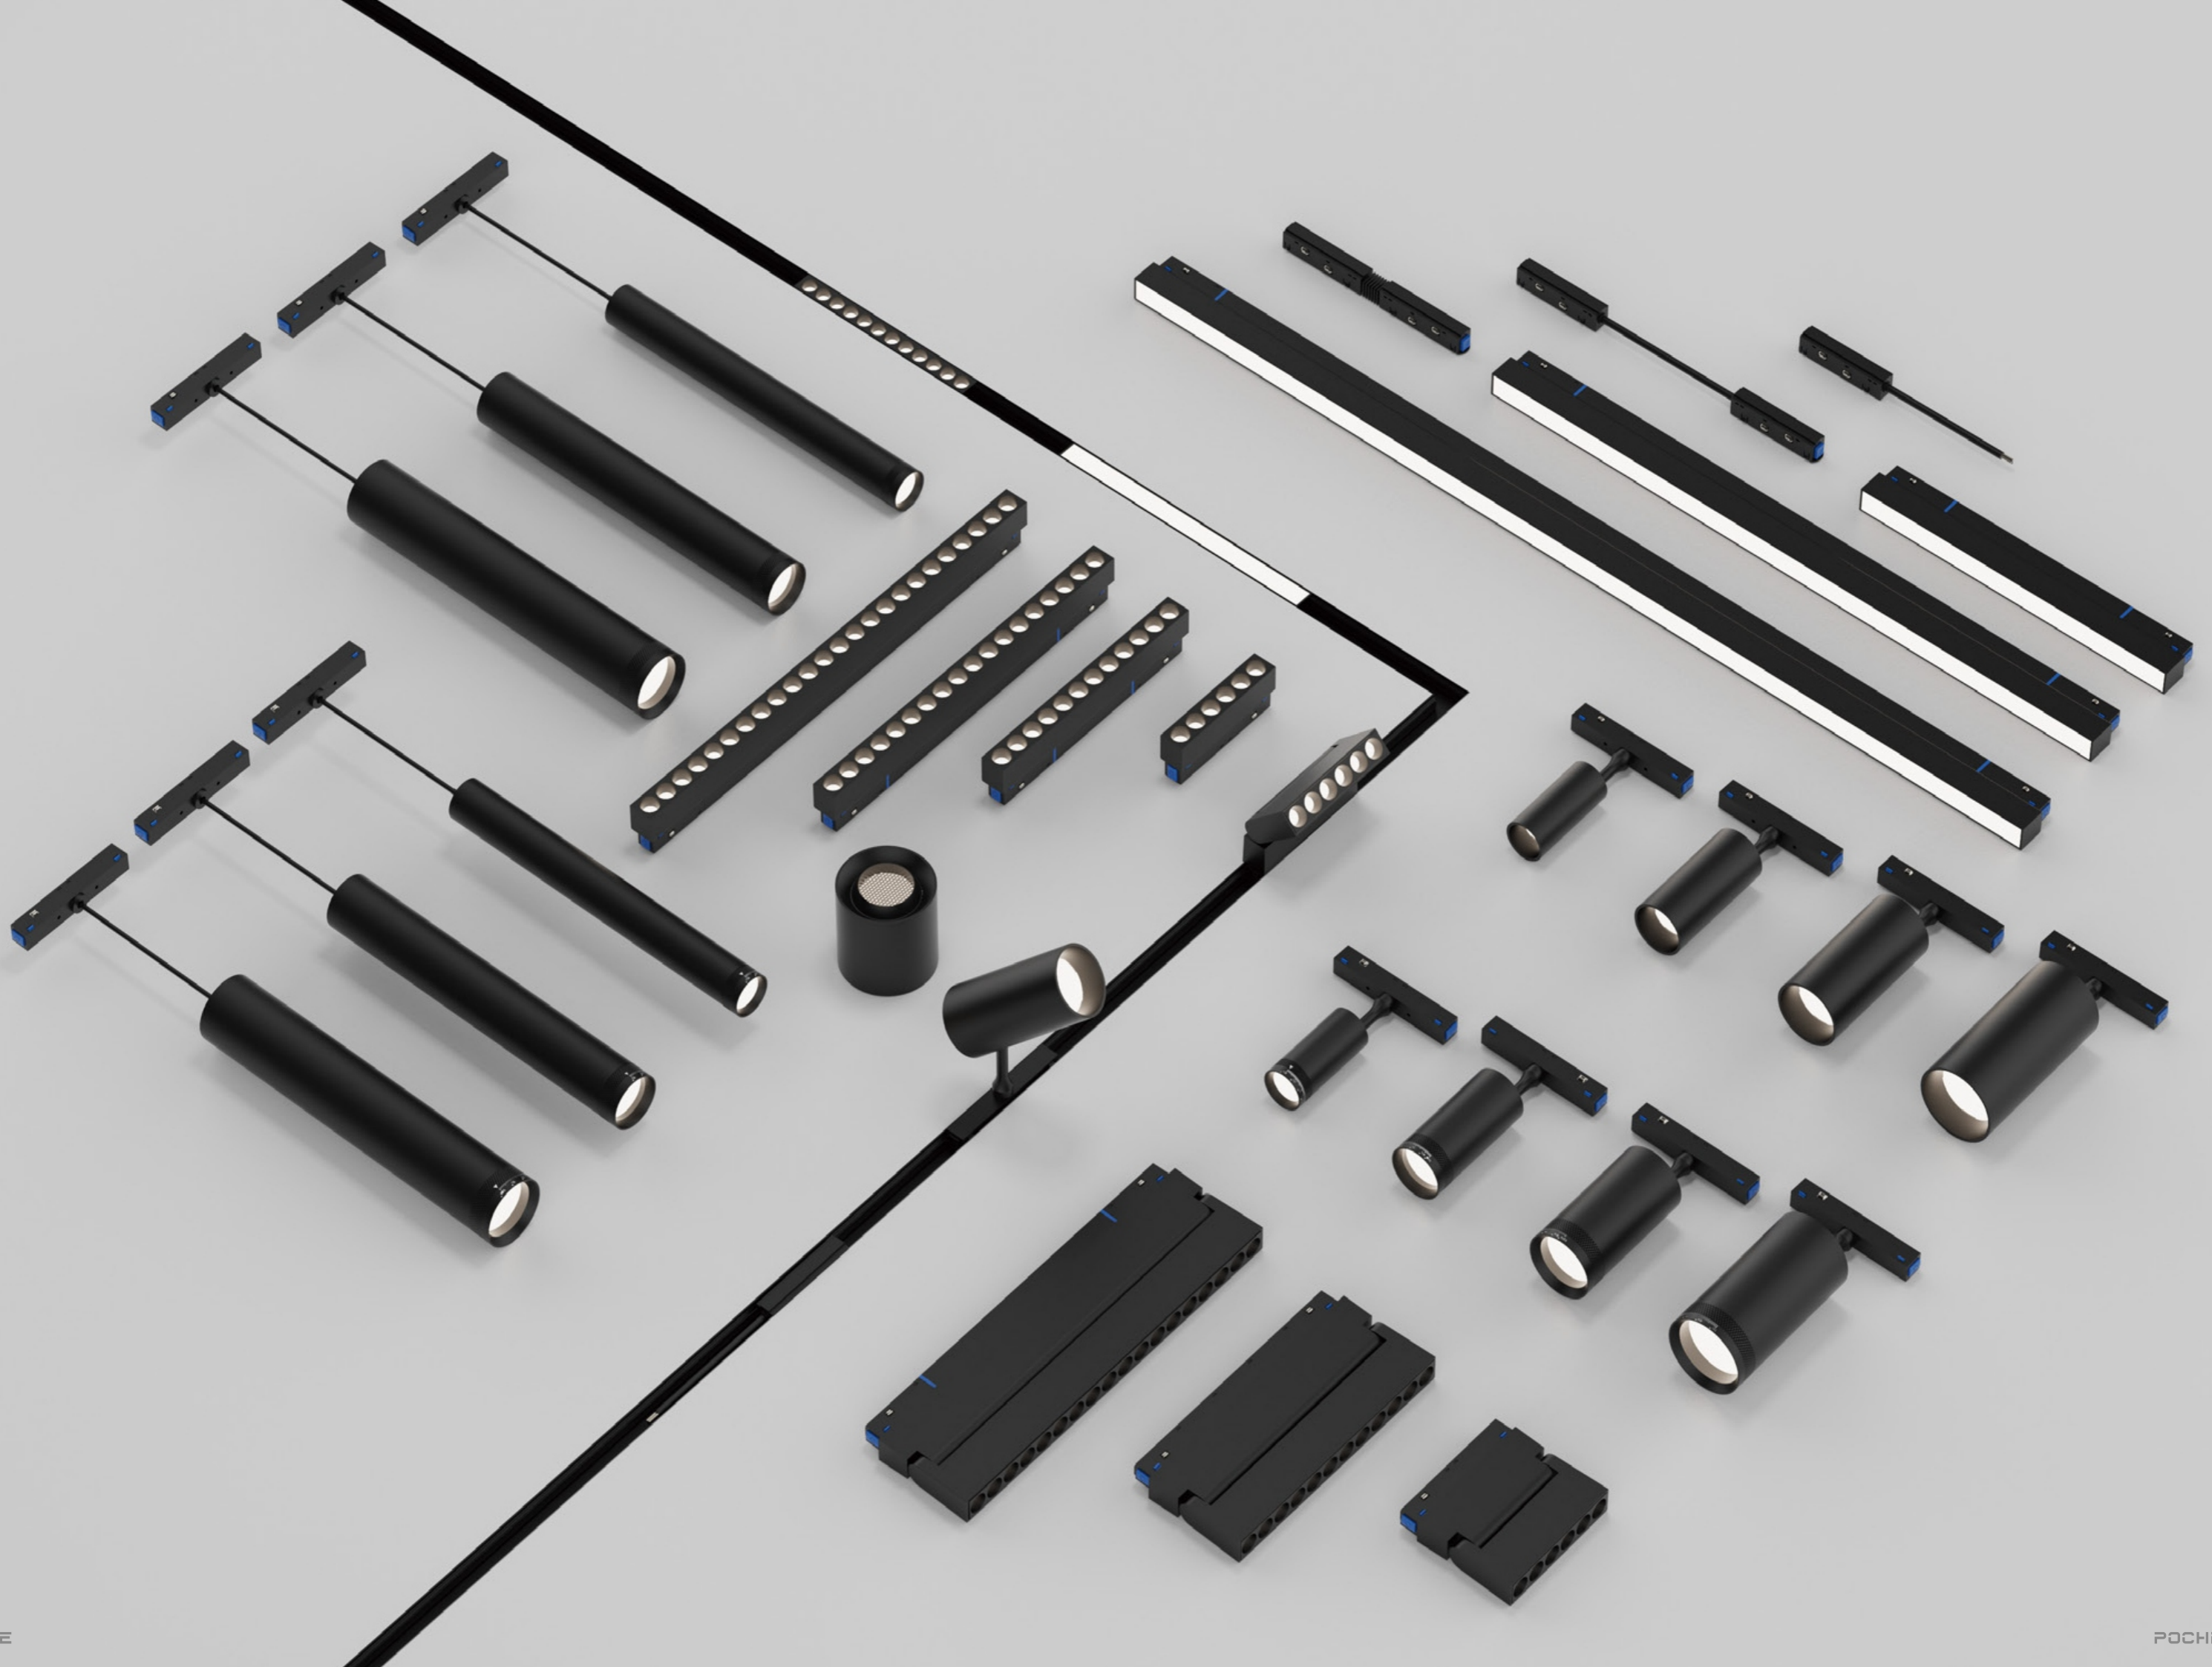


8010

Architectural INDOOR

Magnetic Linear. Ambience/Luminous

MAGNETIC series

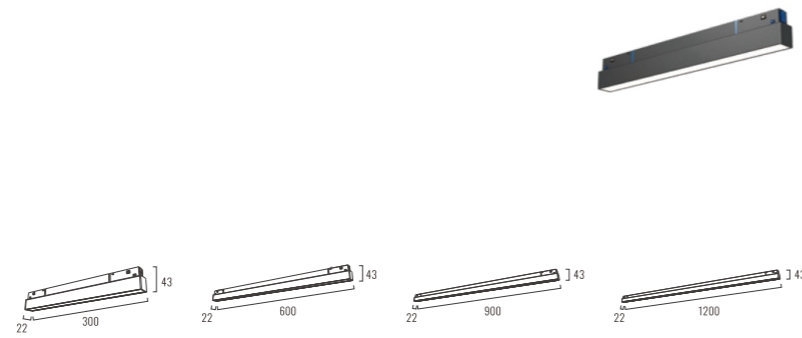

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	10W	300x22x43mm	1162lm	848lm	● 2700K	801012.B.P.C
SMD LED	10W	300x22x43mm	1240lm	930lm	● 3000K	801013.B.P.C
SMD LED	10W	300x22x43mm	1318lm	1028lm	○ 4000K	801014.B.P.C
SMD LED	10W	300x22x43mm	1369lm	1068lm	○ 5000K	801015.B.P.C
SMD LED Zigbee Smart	0-12W	300x22x43mm	0-1369lm	0-1068lm	● 2700K--○ 6500K	801016.B.5.C
SMD LED	20W	600x22x43mm	2324lm	1696lm	● 2700K	801022.B.P.C
SMD LED	20W	600x22x43mm	2480lm	1860lm	● 3000K	801023.B.P.C
SMD LED	20W	600x22x43mm	2636lm	2056lm	○ 4000K	801024.B.P.C
SMD LED	20W	600x22x43mm	2738lm	2136lm	○ 5000K	801025.B.P.C
SMD LED Zigbee Smart	0-20W	600x22x43mm	0-2738lm	0-2136lm	● 2700K--○ 6500K	801026.B.5.C
SMD LED	25W	900x22x43mm	2905lm	2120lm	● 2700K	801032.B.P.C
SMD LED	25W	900x22x43mm	3100lm	2325lm	● 3000K	801033.B.P.C
SMD LED	25W	900x22x43mm	3295lm	2570lm	○ 4000K	801034.B.P.C
SMD LED	25W	900x22x43mm	3422lm	2669lm	○ 5000K	801035.B.P.C
SMD LED	30W	1200x22x43mm	3486lm	2545lm	● 2700K	801042.B.P.C
SMD LED	30W	1200x22x43mm	3720lm	2790lm	● 3000K	801043.B.P.C
SMD LED	30W	1200x22x43mm	3954lm	3084lm	○ 4000K	801044.B.P.C
SMD LED	30W	1200x22x43mm	4107lm	3203lm	○ 5000K	801045.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(B-Black W-White)




8011

Architectural INDOOR

Magnetic Linear. Ambience/Luminous

MAGNETIC series

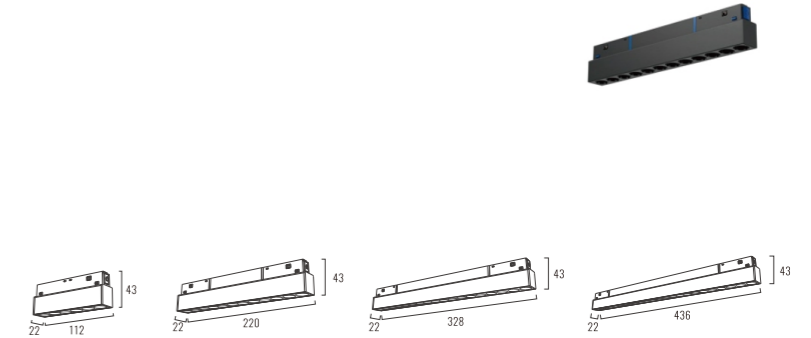

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	6W	112x22x43mm	697lm	509lm	● 2700K	801112.B.P.C
SMD LED	6W	112x22x43mm	744lm	558lm	● 3000K	801113.B.P.C
SMD LED	6W	112x22x43mm	791lm	617lm	○ 4000K	801114.B.P.C
SMD LED	6W	112x22x43mm	821lm	641lm	○ 5000K	801115.B.P.C
SMD LED	12W	220x22x43mm	1394lm	1018lm	● 2700K	801122.B.P.C
SMD LED	12W	220x22x43mm	1488lm	1116lm	● 3000K	801123.B.P.C
SMD LED	12W	220x22x43mm	1582lm	1234lm	○ 4000K	801124.B.P.C
SMD LED	12W	220x22x43mm	1643lm	1281lm	○ 5000K	801125.B.P.C
SMD LED Zigbee Smart	0-12W	220x22x43mm	0-1643lm	0-1281lm	● 2700K--○ 6500K	801126.B.5.C
SMD LED	18W	328x22x43mm	2091lm	1527lm	● 2700K	801132.B.P.C
SMD LED	18W	328x22x43mm	2232lm	1674lm	● 3000K	801133.B.P.C
SMD LED	18W	328x22x43mm	2373lm	1851lm	○ 4000K	801134.B.P.C
SMD LED	18W	328x22x43mm	2464lm	1922lm	○ 5000K	801135.B.P.C
SMD LED Zigbee Smart	0-18W	328x22x43mm	0-2464lm	0-1922lm	● 2700K--○ 6500K	801136.B.5.C
SMD LED	24W	436x22x43mm	2789lm	2036lm	● 2700K	801142.B.P.C
SMD LED	24W	436x22x43mm	2976lm	2232lm	● 3000K	801143.B.P.C
SMD LED	24W	436x22x43mm	3163lm	2468lm	○ 4000K	801144.B.P.C
SMD LED	24W	436x22x43mm	3286lm	2563lm	○ 5000K	801145.B.P.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(B-Black W-White)




8012

Magnetic Linear. Ambience/Luminous

MAGNETIC series

Architectural INDOOR




Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	6W	112x22x105mm	697lm	509lm	● 2700K	801212.B.P.C
SMD LED	6W	112x22x105mm	744lm	558lm	● 3000K	801213.B.P.C
SMD LED	6W	112x22x105mm	791lm	617lm	○ 4000K	801214.B.P.C
SMD LED	6W	112x22x105mm	821lm	641lm	○ 5000K	801215.B.P.C
SMD LED	12W	220x22x105mm	1394lm	1018lm	● 2700K	801222.B.P.C
SMD LED	12W	220x22x105mm	1488lm	1116lm	● 3000K	801223.B.P.C
SMD LED	12W	220x22x105mm	1582lm	1234lm	○ 4000K	801224.B.P.C
SMD LED	12W	220x22x105mm	1643lm	1281lm	○ 5000K	801225.B.P.C
SMD LED Zigbee Smart	0-12W	220x22x105mm	0-1643lm	0-1281lm	● 2700K - ○ 6500K	801226.B.5.C
SMD LED	18W	330x22x105mm	2091lm	1527lm	● 2700K	801232.B.P.C
SMD LED	18W	330x22x105mm	2232lm	1674lm	● 3000K	801233.B.P.C
SMD LED	18W	330x22x105mm	2373lm	1851lm	○ 4000K	801234.B.P.C
SMD LED	18W	330x22x105mm	2464lm	1922lm	○ 5000K	801235.B.P.C
SMD LED Zigbee Smart	0-18W	330x22x105mm	0-2464lm	0-1922lm	● 2700K - ○ 6500K	801236.B.5.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(B-Black W-White)




8013

Magnetic Linear. Ambience/Luminous

MAGNETIC series

Architectural INDOOR

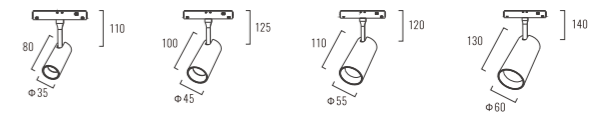

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	7W	∅35x80mm	813lm	594lm	● 2700K	801312.B.P.C
COB LED	7W	∅35x80mm	868lm	651lm	● 3000K	801313.B.P.C
COB LED	7W	∅35x80mm	923lm	720lm	○ 4000K	801314.B.P.C
COB LED	7W	∅35x80mm	958lm	747lm	○ 5000K	801315.B.P.C
COB LED	12W	∅45x100mm	1394lm	1018lm	● 2700K	801322.B.P.C
COB LED	12W	∅45x100mm	1488lm	1116lm	● 3000K	801323.B.P.C
COB LED	12W	∅45x100mm	1582lm	1234lm	○ 4000K	801324.B.P.C
COB LED	12W	∅45x100mm	1643lm	1281lm	○ 5000K	801325.B.P.C
COB LED Zigbee Smart	0-12W	∅45x100mm	0-1643lm	0-1281lm	● 2700K - ○ 6500K	801326.B.5.C
COB LED	18W	∅55x110mm	2091lm	1527lm	● 2700K	801332.B.P.C
COB LED	18W	∅55x110mm	2232lm	1674lm	● 3000K	801333.B.P.C
COB LED	18W	∅55x110mm	2373lm	1851lm	○ 4000K	801334.B.P.C
COB LED	18W	∅55x110mm	2464lm	1922lm	○ 5000K	801335.B.P.C
COB LED Zigbee Smart	0-18W	∅55x110mm	0-2464lm	0-1922lm	● 2700K - ○ 6500K	801336.B.5.C
COB LED	24W	∅60x130mm	2789lm	2036lm	● 2700K	801342.B.P.C
COB LED	24W	∅60x130mm	2976lm	2232lm	● 3000K	801343.B.P.C
COB LED	24W	∅60x130mm	3163lm	2468lm	○ 4000K	801344.B.P.C
COB LED	24W	∅60x130mm	3286lm	2563lm	○ 5000K	801345.B.P.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(B-Black W-White)



8014


Magnetic Linear. Ambience/Luminous

MAGNETIC series



Beam Angle Flexible and Adjustable

Architectural INDOOR

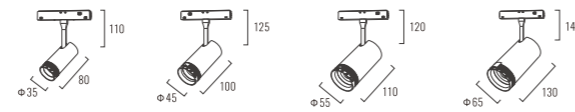

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	ø35x80mm	581lm	424lm	● 2700K	801412.B.P.C
COB LED	5W	ø35x80mm	620lm	465lm	● 3000K	801413.B.P.C
COB LED	5W	ø35x80mm	659lm	514lm	○ 4000K	801414.B.P.C
COB LED	5W	ø35x80mm	684lm	534lm	○ 5000K	801415.B.P.C
COB LED	12W	ø45x100mm	1394lm	1018lm	● 2700K	801422.B.P.C
COB LED	12W	ø45x100mm	1488lm	1116lm	● 3000K	801423.B.P.C
COB LED	12W	ø45x100mm	1582lm	1234lm	○ 4000K	801424.B.P.C
COB LED	12W	ø45x100mm	1643lm	1281lm	○ 5000K	801425.B.P.C
COB LED Zigbee Smart	0-12W	ø45x100mm	0-1643lm	0-1281lm	● 2700K - ○ 6500K	801426.B.5.C
COB LED	18W	ø55x110mm	2091lm	1527lm	● 2700K	801432.B.P.C
COB LED	18W	ø55x110mm	2232lm	1674lm	● 3000K	801433.B.P.C
COB LED	18W	ø55x110mm	2373lm	1851lm	○ 4000K	801434.B.P.C
COB LED	18W	ø55x110mm	2464lm	1922lm	○ 5000K	801435.B.P.C
COB LED Zigbee Smart	0-18W	ø55x110mm	0-2464lm	0-1922lm	● 2700K - ○ 6500K	801436.B.5.C
COB LED	24W	ø65x130mm	2789lm	2036lm	● 2700K	801442.B.P.C
COB LED	24W	ø65x130mm	2976lm	2232lm	● 3000K	801443.B.P.C
COB LED	24W	ø65x130mm	3163lm	2468lm	○ 4000K	801444.B.P.C
COB LED	24W	ø65x130mm	3286lm	2563lm	○ 5000K	801445.B.P.C

Beam Angle: B(1-15° 2-20° 3-40° 4-60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(B-Black W-White)




8015

Magnetic Linear. Ambience/Luminous

MAGNETIC series

Architectural INDOOR

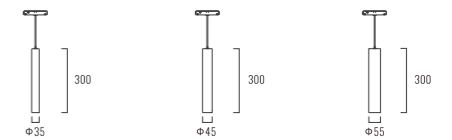

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	7W	ø35x300mm	813lm	594lm	● 2700K	801512.B.P.C
COB LED	7W	ø35x300mm	868lm	651lm	● 3000K	801513.B.P.C
COB LED	7W	ø35x300mm	923lm	720lm	○ 4000K	801514.B.P.C
COB LED	7W	ø35x300mm	958lm	747lm	○ 5000K	801515.B.P.C
COB LED	12W	ø45x300mm	1394lm	1018lm	● 2700K	801522.B.P.C
COB LED	12W	ø45x300mm	1488lm	1116lm	● 3000K	801523.B.P.C
COB LED	12W	ø45x300mm	1582lm	1234lm	○ 4000K	801524.B.P.C
COB LED	12W	ø45x300mm	1643lm	1281lm	○ 5000K	801525.B.P.C
COB LED Zigbee Smart	0-12W	ø45x300mm	0-1643lm	0-1281lm	● 2700K - ○ 6500K	801526.B.5.C
COB LED	18W	ø55x300mm	2091lm	1527lm	● 2700K	801532.B.P.C
COB LED	18W	ø55x300mm	2232lm	1674lm	● 3000K	801533.B.P.C
COB LED	18W	ø55x300mm	2373lm	1851lm	○ 4000K	801534.B.P.C
COB LED	18W	ø55x300mm	2464lm	1922lm	○ 5000K	801535.B.P.C
COB LED Zigbee Smart	0-18W	ø55x300mm	0-2464lm	0-1922lm	● 2700K - ○ 6500K	801536.B.5.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(B-Black W-White)



8016


Architectural INDOOR

Magnetic Linear. Ambience/Luminous

MAGNETIC series



Beam Angle Flexible and Adjustable

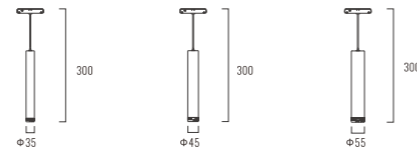

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	7W	Ø35x300mm	813lm	594lm	● 2700K	801612.B.P.C
COB LED	7W	Ø35x300mm	868lm	651lm	● 3000K	801613.B.P.C
COB LED	7W	Ø35x300mm	923lm	720lm	○ 4000K	801614.B.P.C
COB LED	7W	Ø35x300mm	958lm	747lm	○ 5000K	801615.B.P.C
COB LED	12W	Ø45x300mm	1394lm	1018lm	● 2700K	801622.B.P.C
COB LED	12W	Ø45x300mm	1488lm	1116lm	● 3000K	801623.B.P.C
COB LED	12W	Ø45x300mm	1582lm	1234lm	○ 4000K	801624.B.P.C
COB LED	12W	Ø45x300mm	1643lm	1281lm	○ 5000K	801625.B.P.C
COB LED Zigbee Smart	0-12W	Ø45x300mm	0-1643lm	0-1281lm	● 2700K - ○ 6500K	801626.B.5.C
COB LED	18W	Ø55x300mm	2091lm	1527lm	● 2700K	801632.B.P.C
COB LED	18W	Ø55x300mm	2232lm	1674lm	● 3000K	801633.B.P.C
COB LED	18W	Ø55x300mm	2373lm	1851lm	○ 4000K	801634.B.P.C
COB LED	18W	Ø55x300mm	2464lm	1922lm	○ 5000K	801635.B.P.C
COB LED Zigbee Smart	0-18W	Ø55x300mm	0-2464lm	0-1922lm	● 2700K - ○ 6500K	801636.B.5.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(B-Black W-White)




8030

surface suspended. Ambience/Luminous

MAGNETIC series

Architectural INDOOR

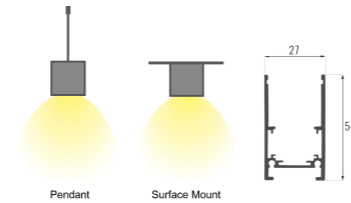


Architectural INDOOR

8031

Slim Recessed. Ambience/Luminous

MAGNETIC series

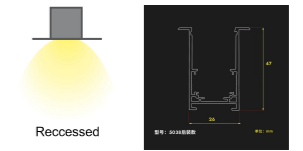


Code 8030.L.T.C

Length: B(1-1000mm 2-2000mm 3-3000mm)


Type: T(1-Surface 2-Pendant)

Colour Finish: C(1 - Sandy Black 2 - Sandy White)


Track Connection:




90° Corner Connector (Horizontal)
Code: MAGS120PS001



90° Corner Connector (Vertical)
Code: MAGS120PS002



T Corner Connector
Code: MAGS120PS003



90° Corner Connector (X)
Code: MAGS120PS004



Suspension Strand
Code: MAGS120PS007




End Cap
Code: MAGS120PS005




Suspension Strand
Code: MAGS120PS006

Connector:




LIVE End
Code: MAGS12EC002




LIVE End DALI
Code: MAGS12EC003



Connector 180°
Code: MAGS12EC004



Connector Flex
Code: MAGS12EC005



Connector Flex DIM
Code: MAGS12EC006


Code 8031.L.T.C

Length: B(1-1000mm 2-2000mm 3-3000mm)


Type: T(1-Recessed)

Colour Finish: C(1 - Sandy Black 2 - Sandy White)


Track Connection:




90° Corner Connector (Horizontal)
Code: MAGS130PS001



90° Corner Connector (Vertical)
Code: MAGS130PS002




T Corner Connector
Code: MAGS130PS003



90° Corner Connector (X)
Code: MAGS130PS004




End Cap
Code: MAGS130PS005




Track Connector
Code: MAGS130PS006


Connector:




LIVE End
Code: MAGS13EC002




LIVE End DALI
Code: MAGS13EC003



Connector 180°
Code: MAGS13EC004



Connector Flex
Code: MAGS13EC005




Connector Flex DIM
Code: MAGS13EC006

8032

Slim Recessed. Ambience/Luminous

MAGNETIC series

Architectural INDOOR

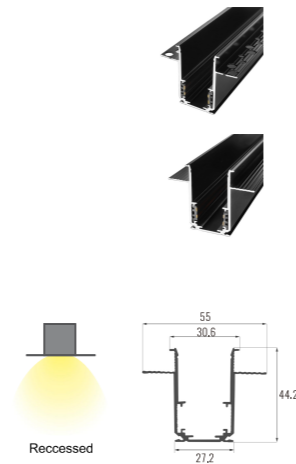


Code 8032.L.T.C

Length: B(1-1000mm 2-2000mm 3-3000mm)


Type: T(1-Recessed)

Colour Finish: C(1 - Sandy Black 2 - Sandy White)

Track Connection:

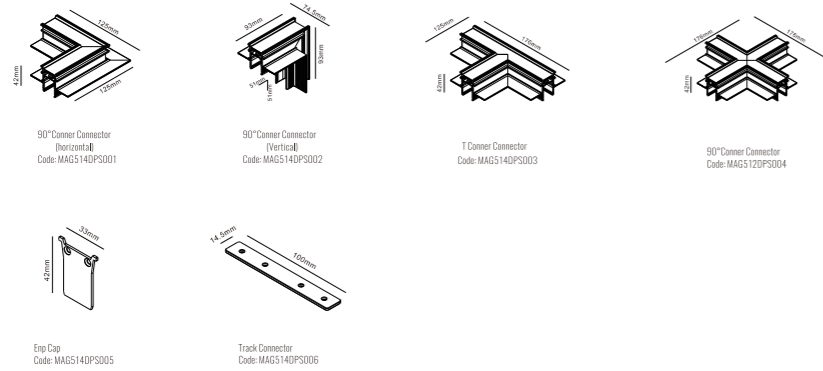

Connector:

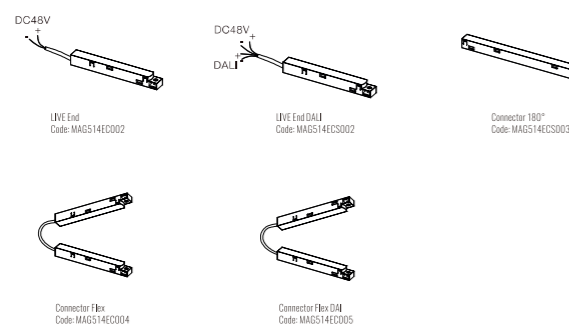


8033

Slim Recessed. Ambience/Luminous

MAGNETIC series

Architectural INDOOR

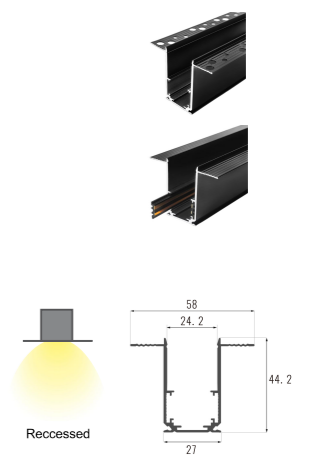


Code 8033.L.T.C

Length: B(1-1000mm 2-2000mm 3-3000mm)


Type: T(1-Recessed)

Colour Finish: C(1 - Sandy Black 2 - Sandy White)

Track Connection:

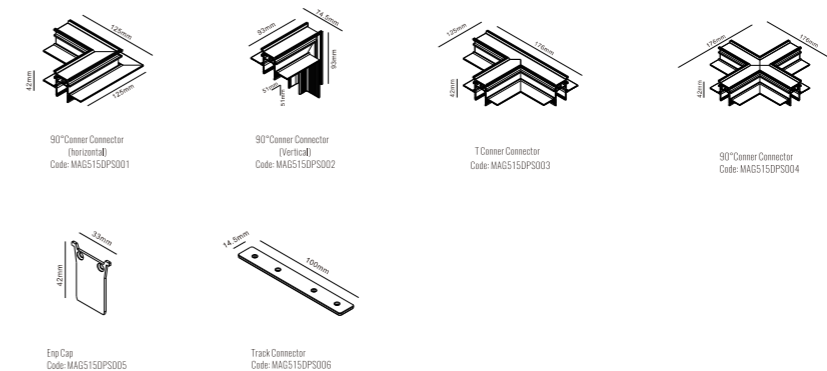

Connector:

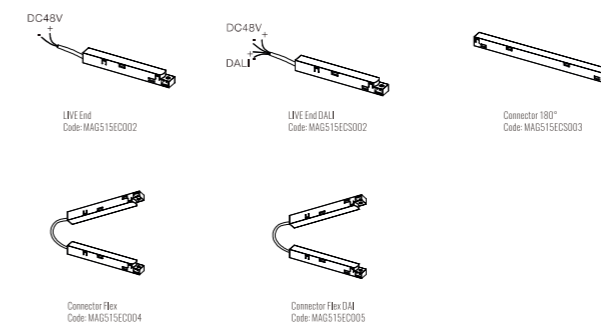


8022

Magnetic Linear. Ambience/Luminous

SLIM MAGNETIC series

Architectural INDOOR




Code 8022.L.T.C

Length: B(1-1000mm 2-1500mm 3-3000mm)


Type: T(1-Surface)

Colour Finish: C(1-Black)

Connector:



LIVE End
Code: MAGS12EC002



Connector 180°
Code: MAGS12EC003




Connector Flex
Code: MAGS12EC004

8023

Magnetic Linear. Ambience/Luminous

SLIM MAGNETIC series

Architectural INDOOR




Code 8023.L.T.C

Length: B(1-1000mm 2-1500mm 3-3000mm)


Type: T(1-Surface)

Colour Finish: C(1-Black)

Connector:



LIVE End
Code: MAGS12EC002



Connector 180°
Code: MAGS12EC003




Connector Flex
Code: MAGS12EC004



8017

Magnetic Linear. Ambience/Luminous

SLIM MAGNETIC series



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	8W	300x10x19mm	930lm	679lm	● 2700K	801712.B.P.C
SMD LED	8W	300x10x19mm	992lm	744lm	● 3000K	801713.B.P.C
SMD LED	8W	300x10x19mm	1054lm	823lm	○ 4000K	801714.B.P.C
SMD LED	8W	300x10x19mm	1095lm	854lm	○ 5000K	801715.B.P.C
SMD LED	12W	450x10x19mm	1394lm	1018lm	● 2700K	801722.B.P.C
SMD LED	12W	450x10x19mm	1488lm	1116lm	● 3000K	801723.B.P.C
SMD LED	12W	450x10x19mm	1582lm	1234lm	○ 4000K	801724.B.P.C
SMD LED	12W	450x10x19mm	1643lm	1281lm	○ 5000K	801725.B.P.C
SMD LED	16W	600x10x19mm	1859lm	1357lm	● 2700K	801732.B.P.C
SMD LED	16W	600x10x19mm	1984lm	1488lm	● 3000K	801733.B.P.C
SMD LED	16W	600x10x19mm	2109lm	1645lm	○ 4000K	801734.B.P.C
SMD LED	16W	600x10x19mm	2190lm	1708lm	○ 5000K	801735.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-0-10V Dim)

Colour Finish: C(B- Black)






BBlack

8018

Magnetic Linear. Ambience/Luminous

SLIM MAGNETIC series

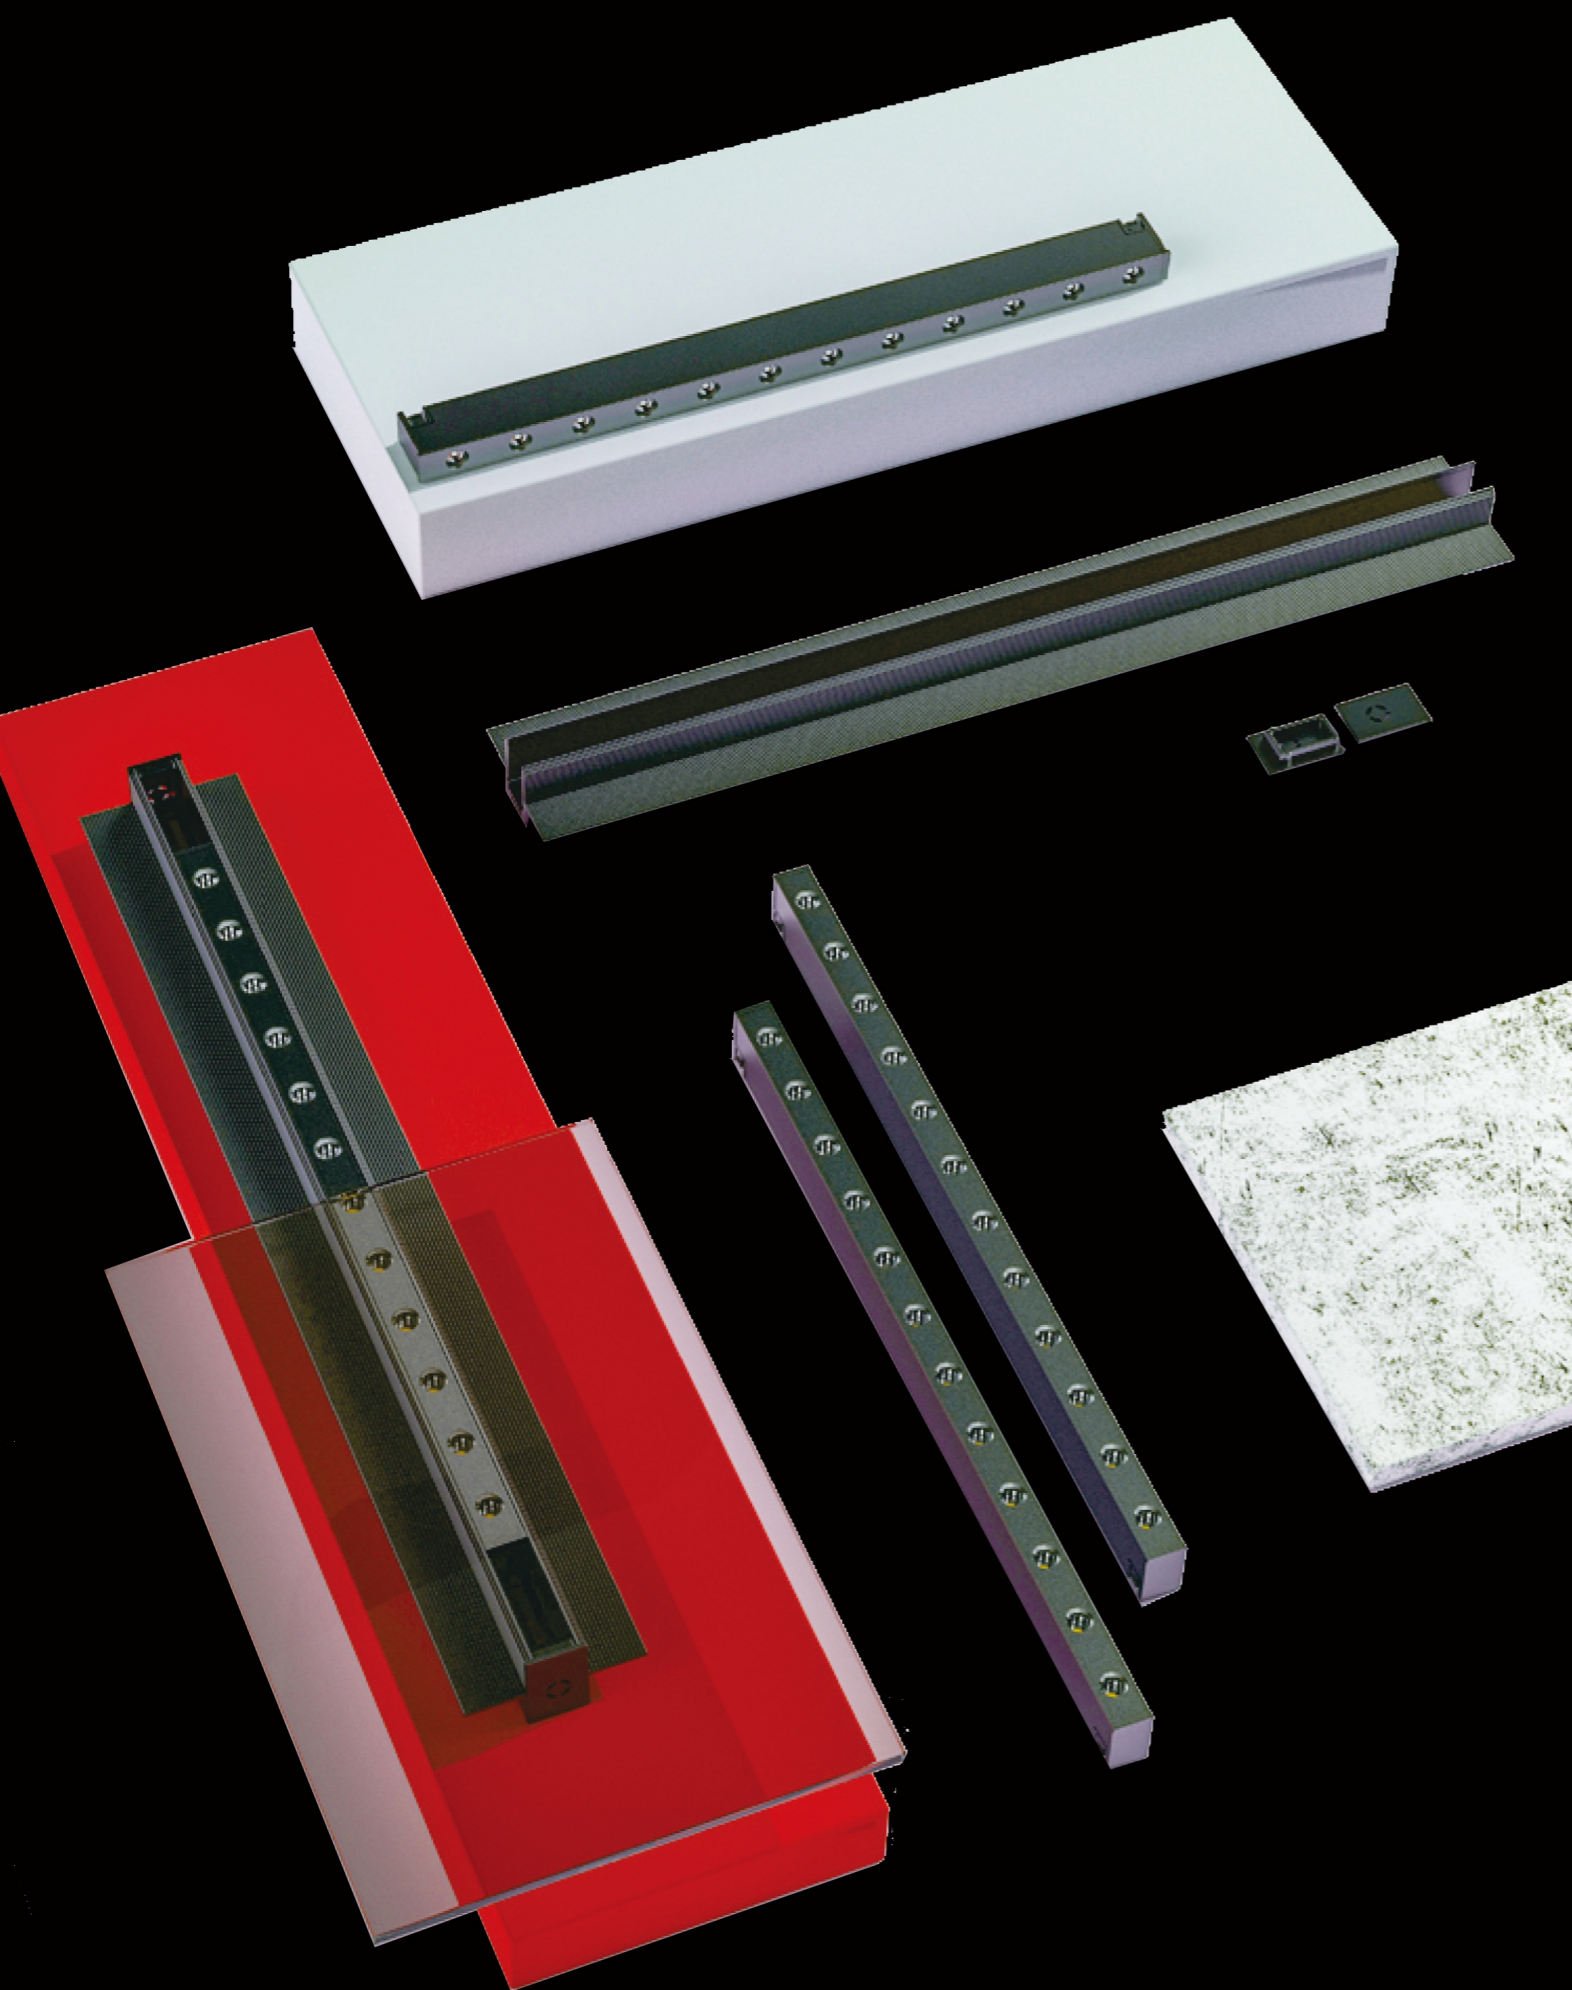

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	5W	120x10x19mm	581lm	424lm	● 2700K	801812.B.P.C
SMD LED	5W	120x10x19mm	620lm	465lm	● 3000K	801813.B.P.C
SMD LED	5W	120x10x19mm	659lm	514lm	● 4000K	801814.B.P.C
SMD LED	5W	120x10x19mm	684lm	534lm	● 5000K	801815.B.P.C
SMD LED	10W	240x10x19mm	1162lm	848lm	● 2700K	801822.B.P.C
SMD LED	10W	240x10x19mm	1240lm	930lm	● 3000K	801823.B.P.C
SMD LED	10W	240x10x19mm	1318lm	1028lm	● 4000K	801824.B.P.C
SMD LED	10W	240x10x19mm	1369lm	1068lm	● 5000K	801825.B.P.C
SMD LED	15W	356x10x19mm	1743lm	1272lm	● 2700K	801832.B.P.C
SMD LED	15W	356x10x19mm	1860lm	1395lm	● 3000K	801833.B.P.C
SMD LED	15W	356x10x19mm	1977lm	1542lm	● 4000K	801834.B.P.C
SMD LED	15W	356x10x19mm	2053lm	1602lm	● 5000K	801835.B.P.C
SMD LED	20W	472x10x19mm	2324lm	1696lm	● 2700K	801842.B.P.C
SMD LED	20W	472x10x19mm	2480lm	1860lm	● 3000K	801843.B.P.C
SMD LED	20W	472x10x19mm	2636lm	2056lm	● 4000K	801844.B.P.C
SMD LED	20W	472x10x19mm	2738lm	2136lm	● 5000K	801845.B.P.C

Beam Angle: B(1-24°)

Power Supply: P(1-On/Off 2-0-10V Dim)

Colour Finish: C(B- Black)





Black

8019

Magnetic Linear. Ambience/Luminous

SLIM MAGNETIC series



OSRAM 50,000hrs LED LM80 Adj. Ra >90 UGR <19 IP20 5 Years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 24°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	5W	120x10x60mm	581lm	424lm	● 2700K	801912.B.P.C
SMD LED	5W	120x10x60mm	620lm	465lm	● 3000K	801913.B.P.C
SMD LED	5W	120x10x60mm	659lm	514lm	● 4000K	801914.B.P.C
SMD LED	5W	120x10x60mm	684lm	534lm	● 5000K	801915.B.P.C
SMD LED	10W	240x10x60mm	1162lm	848lm	● 2700K	801922.B.P.C
SMD LED	10W	240x10x60mm	1240lm	930lm	● 3000K	801923.B.P.C
SMD LED	10W	240x10x60mm	1318lm	1028lm	● 4000K	801924.B.P.C
SMD LED	10W	240x10x60mm	1369lm	1068lm	● 5000K	801925.B.P.C


Beam Angle: B(1-24°)

Power Supply: P(1-On/Off 2-0-10V Dim)


Colour Finish: C(B-Black)



BBlack

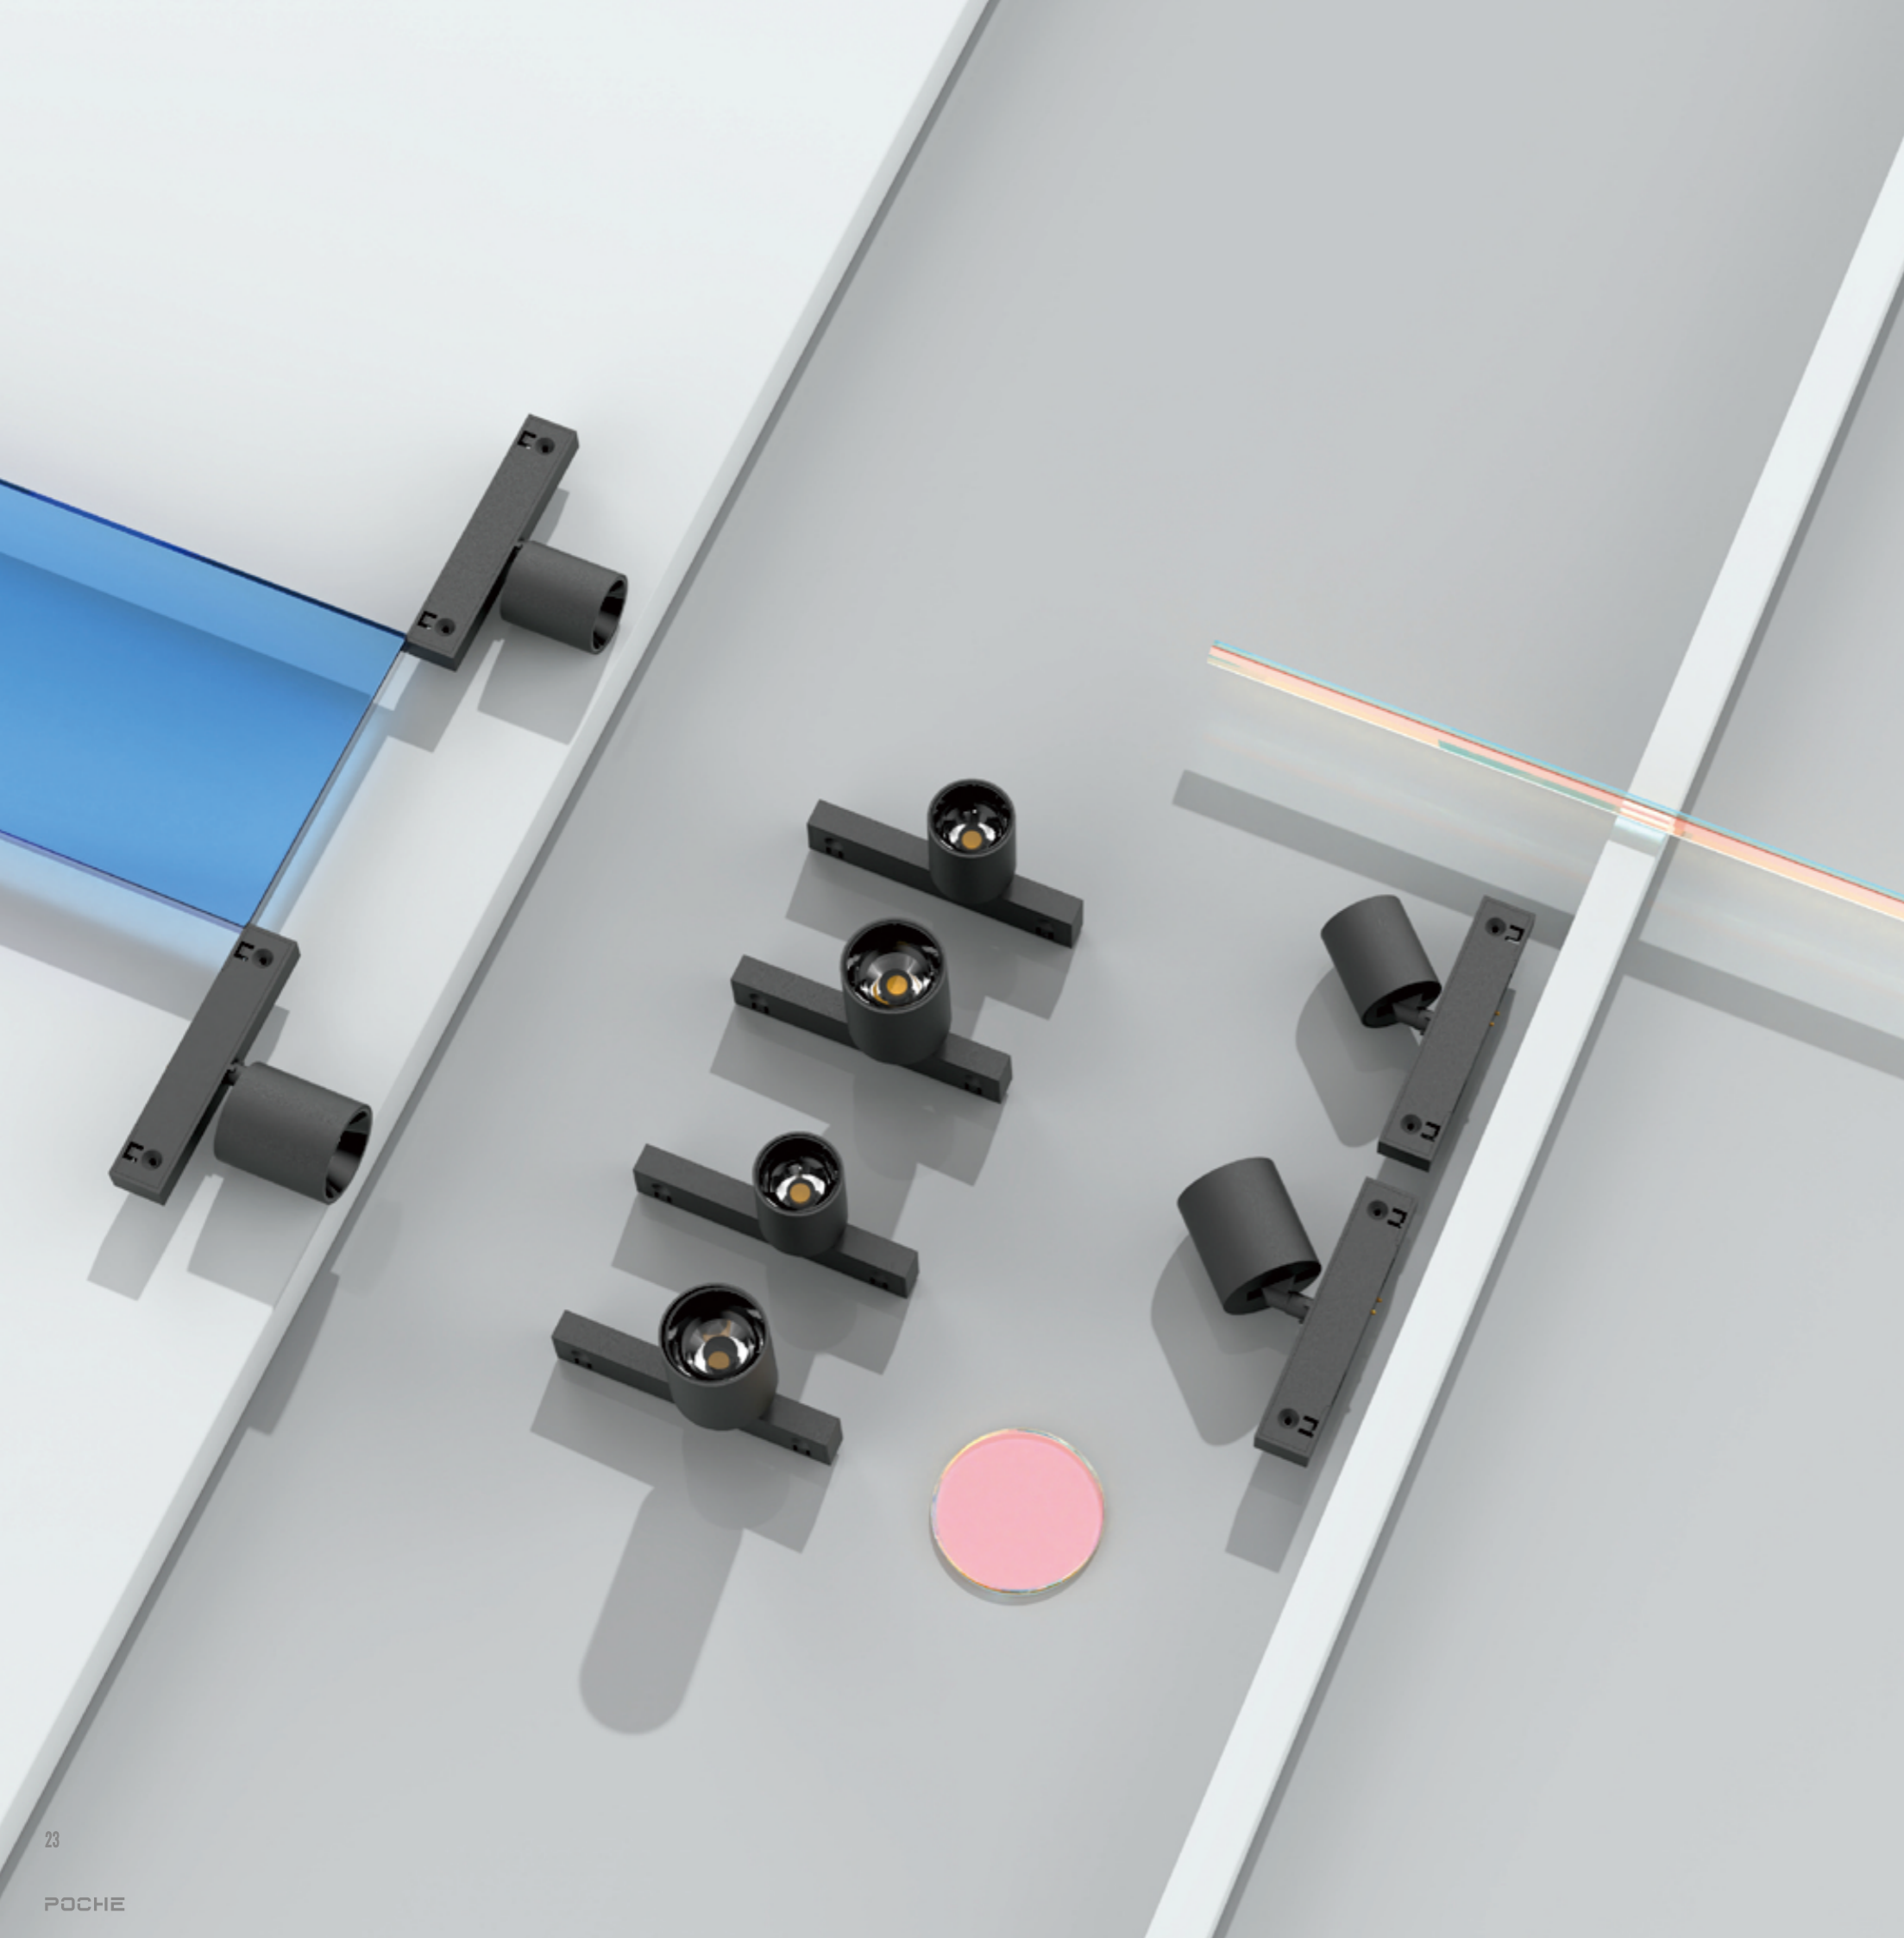

Magnetic Track lighting

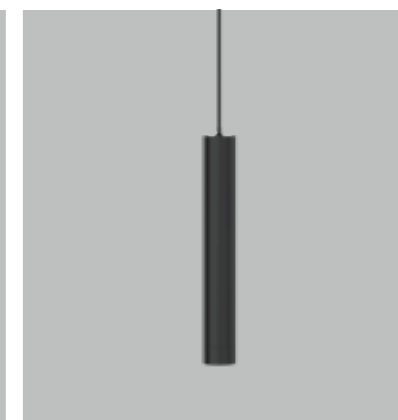

8020

Magnetic Linear. Ambience/Luminous

SLIM MAGNETIC series

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	3W	∅30x68mm	349lm	254lm	● 2700K	802012.B.P.C
COB LED	3W	∅30x68mm	372lm	279lm	● 3000K	802013.B.P.C
COB LED	3W	∅30x68mm	395lm	308lm	○ 4000K	802014.B.P.C
COB LED	3W	∅30x68mm	411lm	320lm	○ 5000K	802015.B.P.C
COB LED	9W	∅30x300mm	1046lm	763lm	● 2700K	802022.B.P.C
COB LED	9W	∅30x300mm	1116lm	837lm	● 3000K	802023.B.P.C
COB LED	9W	∅30x300mm	1186lm	925lm	○ 4000K	802024.B.P.C
COB LED	9W	∅30x300mm	1232lm	961lm	○ 5000K	802025.B.P.C

Beam Angle: B(1-24°)

Power Supply: P(1-0n/Off 2-0-10V Dim)

Colour Finish: C(B-Black)




8021

Magnetic Linear. Ambience/Luminous

SLIM MAGNETIC series

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	∅30x400mm	581lm	424lm	● 2700K	802112.B.P.C
COB LED	5W	∅30x400mm	620lm	465lm	● 3000K	802113.B.P.C
COB LED	5W	∅30x400mm	659lm	514lm	○ 4000K	802114.B.P.C
COB LED	5W	∅30x400mm	684lm	534lm	○ 5000K	802115.B.P.C

Beam Angle: B(1-24°)

Power Supply: P(1-0n/Off 2-0-10V Dim)

Colour Finish: C(B-Black)



8023

Magnetic Linear. Ambience/Luminous

SLIM MAGNETIC series

Architectural INDOOR



OSRAM 50,000hrs	LED LM80	Fixed	Ra >90	UGR <19	IP20	5 years Warranty	AC220-240V 50/60Hz	CE	Die-cast Aluminum Heatsink	24°
---------------------------	-------------	-------	-----------	------------	------	---------------------	-----------------------	----	-------------------------------	-----

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	7W	∅40x300mm	813lm	594lm	● 2700K	802312.B.P.C
COB LED	7W	∅40x300mm	868lm	651lm	● 3000K	802323.B.P.C
COB LED	7W	∅40x300mm	923lm	720lm	○ 4000K	802324.B.P.C
COB LED	7W	∅40x300mm	958lm	747lm	○ 5000K	802325.B.P.C

Beam Angle: B(1-24°)

Power Supply: P(1-On/Off 2-0-10V Dim)

Colour Finish: C(B-Black)





Black

8036

Slim Recessed. Ambience/Luminous

SLIM MAGNETIC series

Architectural INDOOR



Code 8036.L.T.C

Length: B(1-1000mm 2-2000mm 3-3000mm)

Type: T(1-Recessed)


Colour Finish: C(1 - Sandy Black 2 - Sandy White)

Track Connection:




90° Corner Connector
- Standard
Code: MAGS12ZPFS001


Connector:



Live End
Code: MAGS12EC002



Live End DALI
Code: MAGS12ECS002





Connector 180°
Code: MAGS12ECS003

8037

Slim Recessed. Ambience/Luminous

SLIM MAGNETIC series

Architectural INDOOR




Architectural INDOOR

8038

Slim Recessed. Ambience/Luminous

SLIM MAGNETIC series



Code 8037.L.T.C

Length: **B**(1-1000mm 2-2000mm 3-3000mm)

Type: **T**(1-Recessed)


Colour Finish: **C**(1 - Sandy Black 2 - Sandy White)

Track Connection:




90° Corner Connector
Sintered
Code: MAGS120PS001

Connector:



LIVE End
Code: MAGS12EC002



LIVE End DALI
Code: MAGS12ECS002



Connector 180°
Code: MAGS12ECS003


Code 8038.L.T.C

Length: **B**(1-1000mm 2-2000mm 3-3000mm)


Type: **T**(1-Surface)

Colour Finish: **C**(1 - Sandy Black 2 - Sandy White)


Connector:



LIVE End
Code: MAGS12EC002



LIVE End DALI
Code: MAGS12ECS002



Connector 180°
Code: MAGS12ECS003