

PANEL LIGHT

---



PANLE 4750  
40W  
P.2



PANLE 4751  
40W  
P.3



PANLE 4752  
40W  
P.6



PANLE 4753  
40W  
P.7



PANLE 4754  
40W  
P.9



PANLE 4755  
40W  
P.10



PANLE 4756  
40W  
P.11



PANLE 4757  
40W  
P.12



PANLE 4758  
36W  
P.14



PANLE 4759  
50W  
P.15



PANLE 4760  
36W  
P.16





PANLE 4761  
60W  
P.17

# 4750

Downlight Recessed. Ambience/UGR

## PANLEseries



<b>OSRAM</b> 50,000hrs	SMD	LED LM80		Ra >90	UGR <19	IP20		AC220-240V 50/60Hz		Aluminum + Optical PMMA	
---------------------------	-----	-------------	--	-----------	------------	------	--	-----------------------	--	----------------------------	--

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	40W	595x595x10mm	3748lm	3373lm	● 2700K	475012.B.P.C
SMD LED	40W	595x595x10mm	4000lm	3600lm	● 3000K	475013.B.P.C
SMD LED	40W	595x595x10mm	4252lm	3827lm	● 4000K	475014.B.P.C
SMD LED	40W	595x595x10mm	4416lm	3974lm	● 5000K	475015.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(1-White)

Accessories:



Code:4750124.2  
Hanging wires



Code:4750127.3  
Aluminum frame




Code:4750133.5  
Spring clip

4751

Downlight Recessed. Ambience/UGR

PANLE series

Architectural INDOOR



## Back-lit LED Panel Light

32mm Thickness, without LGP, PMMA Lens, Philips free flicker driver, UGR<19, DALI dimmable for option.

Different structure for the edge-lit, the back-lit more economical solution. LED panel Backlit light is with direct lighting design, which has higher lumen efficiency and perfect lighting performance.

OSRAM 50,000hrs	SMD	LED LM80	Flicker <math>Ra > 90</math>	UGR <math>< 19</math>	IP20	5 Years Warranty	AC220-240V 50/60Hz	CE	Aluminum + Optical PMMA	120°
--------------------	-----	-------------	---------------------------------	--------------------------	------	------------------------	-----------------------	----	----------------------------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	40W	1195x295x10mm	3748lm	3373lm	● 2700K	475112.B.P.C
SMD LED	40W	1195x295x10mm	4000lm	3600lm	● 3000K	475113.B.P.C
SMD LED	40W	1195x295x10mm	4252lm	3827lm	● 4000K	475114.B.P.C
SMD LED	40W	1195x295x10mm	4416lm	3974lm	● 5000K	475115.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(1-White)

Accessories:



Code:4751237.2  
Hanging wires




Code:4751248.7  
Aluminum frame



Code:4751321.8  
Spring clip



White

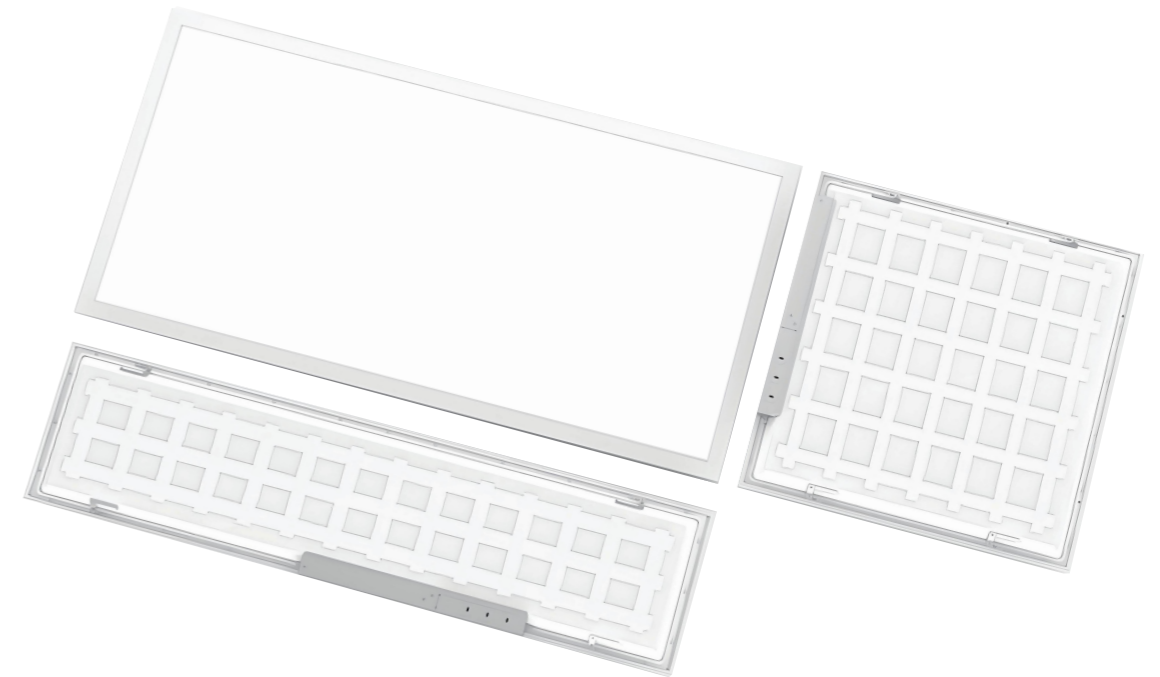



# 4752

Downlight Recessed. Ambience/UGR

## PANLEseries

Architectural INDOOR



<b>OSRAM</b> 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP20	5 Years Warranty	AC220-240V 50/60Hz	CE	Aluminum+PC lens+Iron	120°
---------------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	-----------------------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	40W	595x595x32mm	4123lm	3711lm	● 2700K	475212.B.P.C
SMD LED	40W	595x595x32mm	4400lm	3960lm	● 3000K	475213.B.P.C
SMD LED	40W	595x595x32mm	4677lm	4209lm	● 4000K	475214.B.P.C
SMD LED	40W	595x595x32mm	4858lm	4372lm	● 5000K	475215.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(1-White)

Accessories:



White



Code:4752321.8  
Hanging wires



Code:4753428.7  
Aluminum frame




Code:4752427.2  
Spring clip

4753

Downlight Recessed. Ambience/UGR

PANLE series

Architectural INDOOR



OSRAM | SMD | LED | LM80 | Fixed | Ra >90 | UGR <19 | IP20 | 5 Years Warranty | AC220-240V | 50/60Hz | CE | Aluminum+PC lens+Iron | 120°


Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	40W	1195x595x32mm	4123lm	3711lm	● 2700K	475312.B.P.C
SMD LED	40W	1195x595x32mm	4400lm	3960lm	● 3000K	475313.B.P.C
SMD LED	40W	1195x595x32mm	4677lm	4209lm	● 4000K	475314.B.P.C
SMD LED	40W	1195x595x32mm	4858lm	4372lm	● 5000K	475315.B.P.C

Beam Angle: B(1-120°)


Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(1-White)

Accessories:



Code:4753277.8  
Hanging wires



Code:4753312.9  
Aluminum frame



Code:4753217.8  
Spring clip



White



4754


Downlight Recessed. Ambience/UGR

PANLEseries

IP65



ArchitecturalINDOOR



OSRAM 50,000hrs | SMD LED LM80 | Fixed | Ra >90 | UGR <19 | IP65 | 5 years Warranty | AC200-240V 50/60Hz | CE | Aluminum + PMMA | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	40W	595x595x10mm	3373lm	3036lm	● 2700K	475412.B.P.C
SMD LED	40W	595x595x10mm	3600lm	3240lm	● 3000K	475413.B.P.C
SMD LED	40W	595x595x10mm	3827lm	3444lm	● 4000K	475414.B.P.C
SMD LED	40W	595x595x10mm	3947lm	3577lm	● 5000K	475415.B.P.C

Beam Angle: B(1-120°)


Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(1-White)

Accessories:



White



Code:4754327.1  
Hanging wires



Code:4754612.7  
Aluminum frame



Code:4754332.6  
Spring clip

4755

Downlight Recessed. Ambience/UGR

PANLEseries

IP65



ArchitecturalINDOOR



OSRAM 50,000hrs | SMD LED LM80 | Fixed | Ra <90 | UGR <19 | IP20 | 5 years Warranty | AC220-240V 50/60Hz | CE | Aluminum + Optical PMMA | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	40W	1195x295x10mm	3748lm	3373lm	● 2700K	475512.B.P.C
SMD LED	40W	1195x295x10mm	4000lm	3600lm	● 3000K	475513.B.P.C
SMD LED	40W	1195x295x10mm	4252lm	3827lm	● 4000K	475514.B.P.C
SMD LED	40W	1195x295x10mm	4416lm	3974lm	● 5000K	475515.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(1-White)

Accessories:



White



Code:4755327.6  
Hanging wires



Code:4755612.9  
Aluminum frame



Code:4755321.8  
Spring clip

4756


Downlight Recessed. Ambience/UGR

PANLEseries

IP65



ArchitecturalINDOOR



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra <90	UGR <19	IP65	5 years Warranty	AC220-240V 50/60Hz	CE	Aluminum+PC lens+Iron	120°
--------------------	-----	-------------	-------	-----------	------------	------	---------------------	-----------------------	----	-----------------------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	40W	595x595x32mm	3448lm	3103lm	● 2700K	475612.B.P.C
SMD LED	40W	595x595x32mm	4680lm	3312lm	● 3000K	475613.B.P.C
SMD LED	40W	595x595x32mm	3912lm	3521lm	● 4000K	475614.B.P.C
SMD LED	40W	595x595x32mm	4063lm	3656lm	● 5000K	475615.B.P.C

Beam Angle: B(1-120°)


Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(1-White)

Accessories:



White



Code:4756372.9  
Hanging wires



Code:4756812.6  
Aluminum frame



Code:4756131.1  
Spring clip

4757

Downlight Recessed. Ambience/UGR

PANLEseries

IP65



ArchitecturalINDOOR



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP20	5 years Warranty	AC220-240V 50/60Hz	CE	Aluminum+PC lens+Iron	120°
--------------------	-----	-------------	-------	-----------	------------	------	---------------------	-----------------------	----	-----------------------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	40W	1195x595x32mm	3748lm	3373lm	● 2700K	475712.B.P.C
SMD LED	40W	1195x595x32mm	4000lm	3600lm	● 3000K	475713.B.P.C
SMD LED	40W	1195x595x32mm	4252lm	3827lm	● 4000K	475714.B.P.C
SMD LED	40W	1195x595x32mm	4416lm	3974lm	● 5000K	475715.B.P.C

Beam Angle: B(1-120°)


Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(1-White)

Accessories:



White



Code:4757611.6  
Hanging wires



Code:4757302.1  
Aluminum frame




Code:4757600.8  
Spring clip



4758

Downlight Recessed. Ambience/UGR

PANLE series



<b>OSRAM</b>	SMD	LED LM80	Fixed	Ra <90	UGR <19	IP20	5 years Warranty	AC200-240V 50/60Hz	CE	Aluminum + PC	120°
--------------	-----	----------	-------	--------	---------	------	------------------	--------------------	----	---------------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	36W	595x595x27mm	4217lm	3795lm	● 2700K	475812.B.P.C
SMD LED	36W	595x595x27mm	4500lm	4050lm	● 3000K	475813.B.P.C
SMD LED	36W	595x595x27mm	4784lm	4305lm	● 4000K	475814.B.P.C
SMD LED	36W	595x595x27mm	4968lm	4471lm	● 5000K	475815.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(1-White)

Accessories:



White



Code:4758112.3  
Hanging wires



Code:4758003.2  
Aluminum frame





Code:4758011.3  
Spring clip

4759

Downlight Recessed. Ambience/UGR

PANLEseries

ArchitecturalINDOOR



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra <90	UGR <19	IP20	5 years Warranty	AC200-240V 50/60Hz	CE	Aluminum + PC	120°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	---------------	------


Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	50W	595x595x27mm	5856lm	5271lm	● 2700K	475922.B.P.C
SMD LED	50W	595x595x27mm	6250lm	5625lm	● 3000K	475923.B.P.C
SMD LED	50W	595x595x27mm	6644lm	5979lm	○ 4000K	475924.B.P.C
SMD LED	50W	595x595x27mm	6900lm	6210lm	○ 5000K	475925.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(1-White)

Accessories:



Code:4759003.9  
Hanging wires



Code:4759023.3  
Aluminum frame




Code:4759821.8  
Spring clip

4760

Downlight Recessed. Ambience/UGR

PANLEseries

ArchitecturalINDOOR



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP20	5 years Warranty	AC200-240V 50/60Hz	CE	Aluminum + PC	120°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	---------------	------


Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	36W	1195x295x27mm	4115lm	3704lm	● 2700K	476012.B.P.C
SMD LED	36W	1195x295x27mm	4392lm	3953lm	● 3000K	476013.B.P.C
SMD LED	36W	1195x295x27mm	4669lm	4202lm	○ 4000K	476014.B.P.C
SMD LED	36W	1195x295x27mm	4849lm	4364lm	○ 5000K	476015.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(1-White)

Accessories:



Code:4760323.2  
Hanging wires



Code:4760320.8  
Aluminum frame



Code:4760606.7  
Spring clip

4761

Downlight Recessed. Ambience/UGR

PANLE series

Architectural INDOOR



<b>OSRAM</b> 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP20	5 years Warranty	AC200-240V 50/60Hz		Aluminum + PC	120°
---------------------------	-----	-------------	-------	-----------	------------	------	---------------------	-----------------------	--	---------------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	60W	1195x595x27mm	6746lm	6072lm	● 2700K	476112.B.P.C
SMD LED	60W	1195x595x27mm	7200lm	6480lm	● 3000K	476113.B.P.C
SMD LED	60W	1195x595x27mm	7654lm	6888lm	○ 4000K	476114.B.P.C
SMD LED	60W	1195x595x27mm	7949lm	7154lm	○ 5000K	476115.B.P.C

Beam Angle: B(1-120°)


Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(1-White)

Accessories:



White



Hanging wires



Aluminum frame



Spring clip