














































DOWNLIGHT RECESSED IP20

 FLARE 4040 8W/10W/15W/24W/35W P.1	 FLARE 4041 8W/12W/15W P.2	 FLARE 4042 10W/15W P.3	 FLARE 4043 10W/15W P.4
 FLARE 4044 8W/10W/15W P.6	 FLARE 4045 8W/10W/15W/25W P.7	 FLARE 4046 10W/15W P.8	 FLARE 4047 10W/15W P.10
 FLARE 4048 20W/30W P.11	 FLARE 4049 30W/45W P.12	 LICHTER 4020 12W P.13	 LICHTER 4021 12W P.14
 LICHTER 4022 12W P.15	 LICHTER 4023 12W P.16	 LICHTER 4024 12W P.17	 LICHTER 4025 12W P.18
 LICHTER 4026 12W P.19	 LICHTER 4027 12W P.20	 LICHTER 4028 12W P.21	 MOLDER 4010 10W P.22
 MOLDER 4011 10W P.23	 AVIO RICHT 4050 9W/12W/15W P.24	 AVIO RICHT 4051 5W/7W/9W/12W P.25	 AVIO RICHT 4052 7W/9W/12W P.26
 AVIO RICHT 4053 5W/7W/9W/12W P.27	 AVIO RICHT 4054 8W/10W/15W P.28	 AVIO RICHT 4054 8W/10W/15W P.29	 PREMIUM 4840 12W P.30
 FLECK 4051 5W/10W/15W/18W P.31	 FLECK 4052 10W/18W/30W/36W P.32	 CLOUD 4450 5W/8W/10W/12W/10W/12W P.33-34	

DOWNLIGHT RECESSED IP20

 CLOUD 4451 10W/16W/20W/24W/20W/24W P.36-37	 OPTIX 4720 20W P.38	 OPTIX 4721 12W P.39	 OPTIX 4722 15W P.40
 OPTIX 4723 20W P.41	 OPTIX 4724 35W P.42	 OPTIX 4725 42W P.43	 OPTIX 4726 15W P.44
 OPTIX 4727 20W P.45	 PRISMA 4847 7W/12W/18W/24W/30W P.46-47	 PRISMA 4848 12W/18W/24W P.48	 GLOBUS 4845 3W/5W/7W/9W/12W/20W/30W P.49-50
 GLOBUS 4846 12W/18W/25W P.51	 GLANZ 4832 7W/9W/10W/12W/18W/20W P.52-53	 INTEGRA 4050 12W/18W/30W/35W P.56	 INTEGRA 4051 12W/18W/30W/35W P.58
 INTEGRA 4052 24W/36W/60W/70W P.59	 INTEGRA 4053 36W/54W/90W P.60	 VARIO 4820 8W/12W P.62	 VARIO 4821 8W/12W P.64
 VARIO 4822 20W P.65	 VARIO 4823 24W/36W P.66	 VARIO 4824 32W/48W P.67	 VARIO 4825 48W/72W P.68
 CIELO 4013 12W P.70	 CIELO 4015 12W P.71	 CIELO 4016 12W P.72	 CIELO 4017 24W P.73
 CIELO 4018 36W P.74	 CIELO 4019 48W P.75	 MIKRO 4060 5W/10W/15W P.76	

DOWNLIGHT RECESSED IP20



MIKRO 4061
5W/10W/15W
P.77



MIKRO 4062
5W/10W/15W
P.78



AHLEM 4740
5W
P.79



KOMPAKT 5030
2W
P.80



KOMPAKT 5031
4W
P.82



KOMPAKT 5032
6W
P.83



KOMPAKT 5033
10W
P.84



KOMPAKT 5034
20W
P.85



KOMPAKT 5035
2W
P.86



KOMPAKT 5036
4W
P.87



KOMPAKT 5037
6W
P.88



KOMPAKT 5038
10W
P.89



KOMPAKT 5039
20W
P.90



LINIE 5085
5W
P.91



LINIE 5086
10W
P.92



LINIE 5087
18W
P.93



LINIE 5088
5W
P.94



LINIE 5085
5W
P.95



LINIE 5086
10W
P.96



LINIE 5087
18W
P.97



LINIE 5088
5W
P.98



LINIE 5089
10W
P.99



LINIE 5090
18W
P.100



LINIE 5091
5W
P.101



LINIE 5092
10W
P.102



LINIE 5093
18W
P.103



KLEIN 5076
2W
P.104



KLEIN 5077
2W
P.106



KLEIN 5078
4W
P.107



KLEIN 5079
5W
P.108



KLEIN 5080
10W
P.109



KLEIN 5081
2W
P.110

DOWNLIGHT RECESSED IP20



KLEIN 5082
4W
P.111



KLEIN 5083
6W
P.112



KLEIN 5084
10W
P.113



PLATIN 4730
10W
P.114



PLATIN 4731
20W
P.115



PLATIN 4732
10W
P.116



PLATIN 4733
10W
P.117



PLATIN 4734
20W
P.118




SENSIO 4440
7W/10W/15W/20W
P.120

4040

Downlight Recessed. Ambience/UGR

FLAREseries

Architectural INDOOR

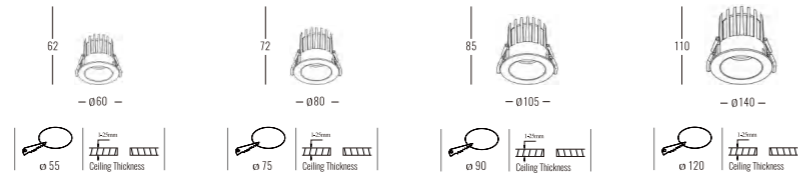

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	8W	ø60x62mm	930lm	655lm	● 2700K	404012.B.P.C
COB LED	8W	ø60x62mm	992lm	699lm	● 3000K	404013.B.P.C
COB LED	8W	ø60x62mm	1054lm	743lm	○ 4000K	404014.B.P.C
COB LED	8W	ø60x62mm	1095lm	772lm	○ 5000K	404015.B.P.C
COB LED	10W	ø80x72mm	1162lm	910lm	● 2700K	404022.B.P.C
COB LED	10W	ø80x72mm	1240lm	971lm	● 3000K	404023.B.P.C
COB LED	10W	ø80x72mm	1318lm	1032lm	○ 4000K	404024.B.P.C
COB LED	10W	ø80x72mm	1369lm	1072lm	○ 5000K	404025.B.P.C
COB LED	24W	ø105x85mm	2717lm	2043lm	● 2700K	404042.B.P.C
COB LED	24W	ø105x85mm	2900lm	2180lm	● 3000K	404043.B.P.C
COB LED	24W	ø105x85mm	3083lm	2317lm	○ 4000K	404044.B.P.C
COB LED	24W	ø105x85mm	3202lm	2407lm	○ 5000K	404045.B.P.C
COB LED	35W	ø140x110mm	3739lm	2844lm	● 2700K	404052.B.P.C
COB LED	35W	ø140x110mm	3990lm	3035lm	● 3000K	404053.B.P.C
COB LED	35W	ø140x110mm	4241lm	3226lm	○ 4000K	404054.B.P.C
COB LED	35W	ø140x110mm	4405lm	3351lm	○ 5000K	404055.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB--White/Black BB-Black/Black BW-Black/White BS-Black/Silver WS-White/Silver)




4041

Downlight Recessed. Ambience/UGR

FLAREseries

Architectural INDOOR

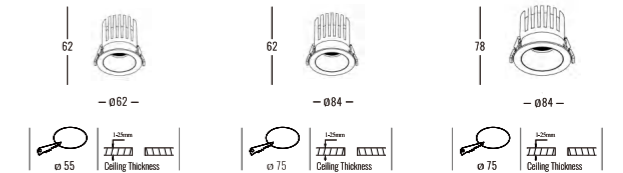

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	8W	ø62x62mm	930lm	655lm	● 2700K	404112.B.P.C
COB LED	8W	ø62x62mm	992lm	699lm	● 3000K	404113.B.P.C
COB LED	8W	ø62x62mm	1054lm	743lm	○ 4000K	404114.B.P.C
COB LED	8W	ø62x62mm	1095lm	772lm	○ 5000K	404115.B.P.C
COB LED	12W	ø84x62mm	1162lm	910lm	● 2700K	404122.B.P.C
COB LED	12W	ø84x62mm	1240lm	971lm	● 3000K	404123.B.P.C
COB LED	12W	ø84x62mm	1318lm	1032lm	○ 4000K	404124.B.P.C
COB LED	12W	ø84x62mm	1369lm	1072lm	○ 5000K	404125.B.P.C
COB LED Zigbee Smart	0-12W	ø84x62mm	0-1369lm	0-1072lm	● 2700K-○ 6500K	404126.B.5.C
COB LED	15W	ø84x78mm	1743lm	1274lm	● 2700K	404132.B.P.C
COB LED	15W	ø84x78mm	1860lm	1359lm	● 3000K	404133.B.P.C
COB LED	15W	ø84x78mm	1977lm	1455lm	○ 4000K	404134.B.P.C
COB LED	15W	ø84x78mm	2053lm	1501lm	○ 5000K	404135.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4042

Downlight Recessed. Ambience/UGR

FLAREseries

Architectural INDOOR

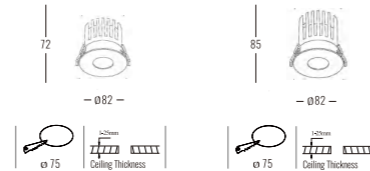

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	ø82x72mm	1162lm	837lm	● 2700K	404212.B.P.C
COB LED	10W	ø82x72mm	1240lm	893lm	● 3000K	404213.B.P.C
COB LED	10W	ø82x72mm	1318lm	949lm	○ 4000K	404214.B.P.C
COB LED	10W	ø82x72mm	1369lm	986lm	○ 5000K	404215.B.P.C
COB LED Zigbee Smart	0-10W	ø82x72mm	0-1369lm	0-986lm	● 2700K - ○ 6500K	404216.B.5.C
COB LED	15W	ø82x85mm	1743lm	1171lm	● 2700K	404222.B.P.C
COB LED	15W	ø82x85mm	1860lm	1250lm	● 3000K	404223.B.P.C
COB LED	15W	ø82x85mm	1977lm	1329lm	○ 4000K	404224.B.P.C
COB LED	15W	ø82x85mm	2053lm	1380lm	○ 5000K	404225.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4043

Downlight Recessed. Ambience/UGR

FLAREseries

Architectural INDOOR

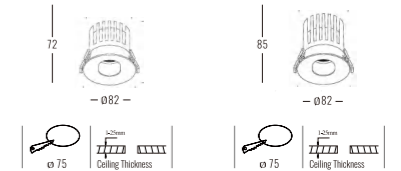

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	ø72x82mm	1162lm	837lm	● 2700K	404312.B.P.C
COB LED	10W	ø72x82mm	1240lm	893lm	● 3000K	404313.B.P.C
COB LED	10W	ø72x82mm	1318lm	949lm	○ 4000K	404314.B.P.C
COB LED	10W	ø72x82mm	1369lm	986lm	○ 5000K	404315.B.P.C
COB LED Zigbee Smart	0-10W	ø82x72mm	0-1369lm	0-986lm	● 2700K - ○ 6500K	404316.B.5.C
COB LED	15W	ø82x85mm	1743lm	1171lm	● 2700K	404322.B.P.C
COB LED	15W	ø82x85mm	1860lm	1250lm	● 3000K	404323.B.P.C
COB LED	15W	ø82x85mm	1977lm	1329lm	○ 4000K	404324.B.P.C
COB LED	15W	ø82x85mm	2053lm	1380lm	○ 5000K	404325.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)



Colour Finish: C(WW-White/White BB-Black/Black)



4044

Downlight Recessed. Ambience/UGR

FLAREseries

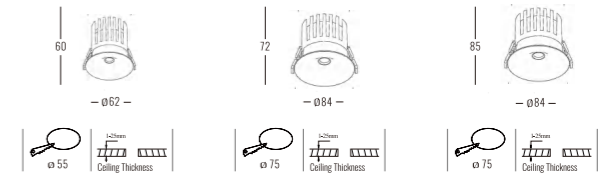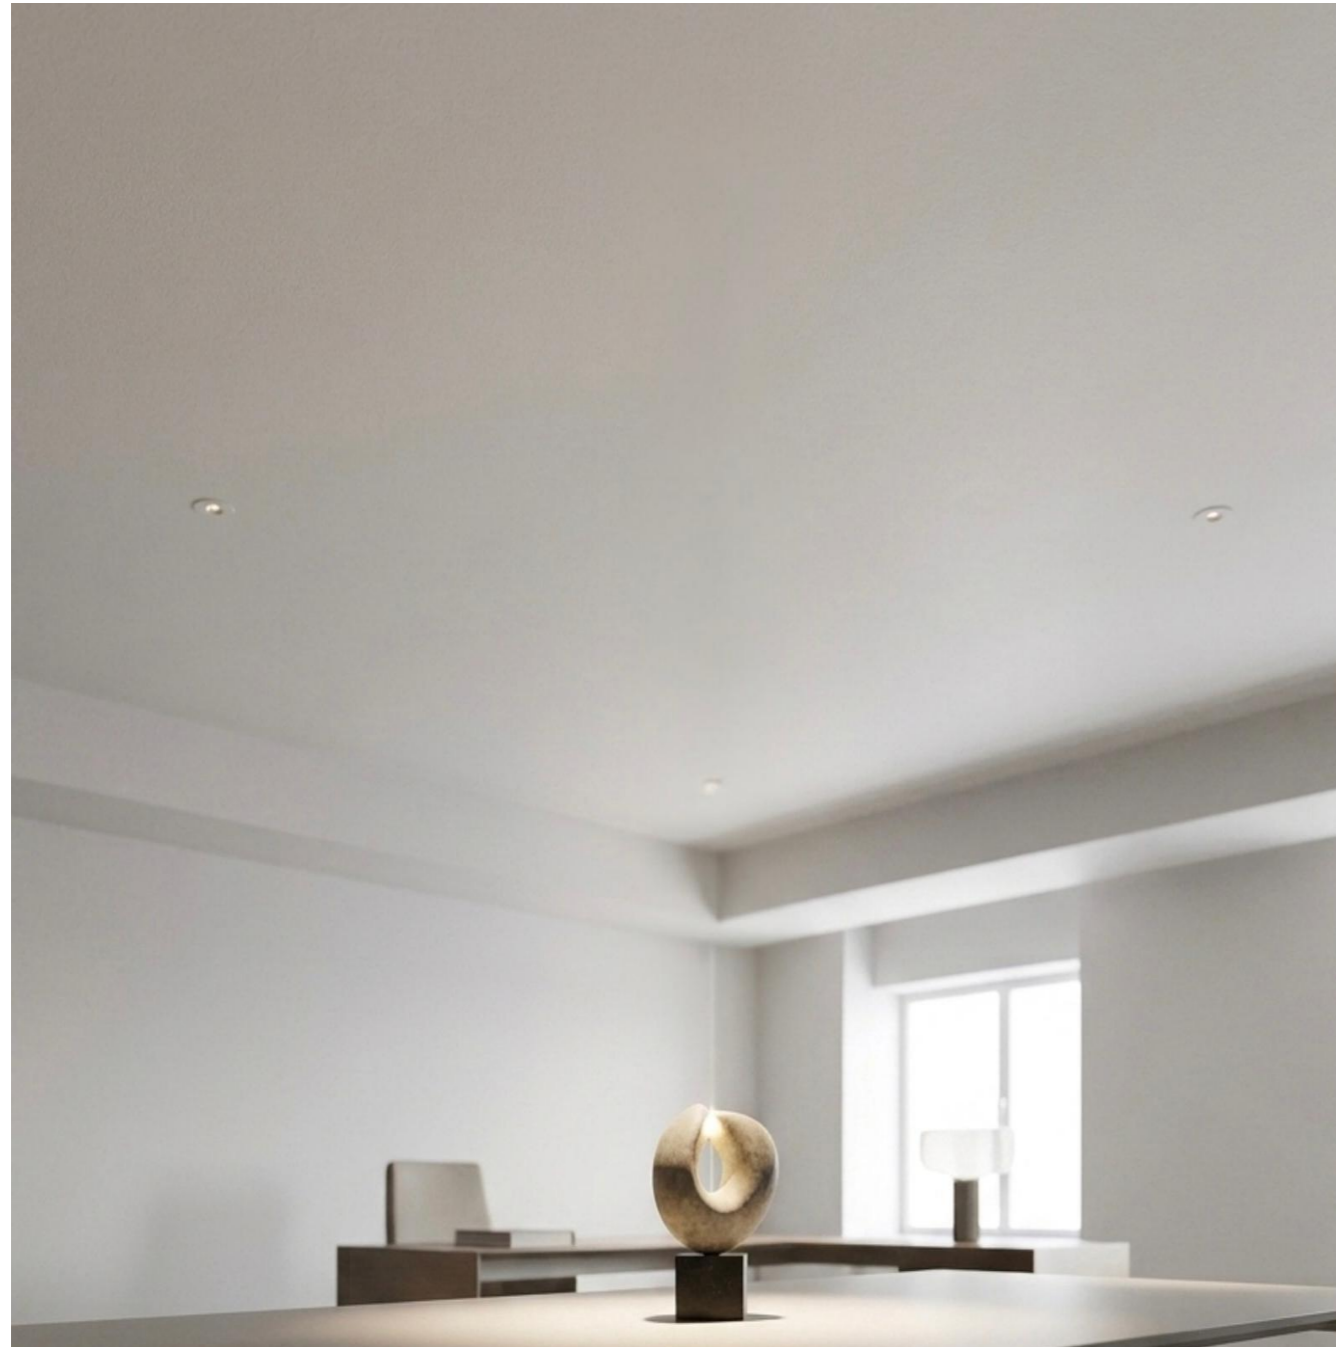

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	8W	∅62x60mm	930lm	565lm	● 2700K	404412.B.P.C
COB LED	8W	∅62x60mm	992lm	603lm	● 3000K	404413.B.P.C
COB LED	8W	∅62x60mm	1054lm	641lm	○ 4000K	404414.B.P.C
COB LED	8W	∅62x60mm	1095lm	665lm	○ 5000K	404415.B.P.C
COB LED	10W	∅84x72mm	1162lm	784lm	● 2700K	404422.B.P.C
COB LED	10W	∅84x72mm	1240lm	837lm	● 3000K	404423.B.P.C
COB LED	10W	∅84x72mm	1318lm	890lm	○ 4000K	404424.B.P.C
COB LED	10W	∅84x72mm	1369lm	924lm	○ 5000K	404425.B.P.C
COB LED Zigbee Smart	0-10W	∅82x72mm	0-1369lm	0-924lm	● 2700K--○ 6500K	404426.B.5.C
COB LED	15W	∅84x85mm	1743lm	1098lm	● 2700K	404432.B.P.C
COB LED	15W	∅84x85mm	1860lm	1172lm	● 3000K	404433.B.P.C
COB LED	15W	∅84x85mm	1977lm	1246lm	○ 4000K	404434.B.P.C
COB LED	15W	∅84x85mm	2053lm	1294lm	○ 5000K	404435.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4045

Downlight Recessed. Ambience/UGR

FLAREseries

Architectural INDOOR



OSRAM 50,000hrs LED LM80 $R_a > 90$ UGR < 19 IP20 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink Fixed Beam Angle						
Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	8W	ø62x60mm	930lm	565lm	● 2700K	404512.B.P.C
COB LED	8W	ø62x60mm	992lm	603lm	● 3000K	404513.B.P.C
COB LED	8W	ø62x60mm	1054lm	641lm	○ 4000K	404514.B.P.C
COB LED	8W	ø62x60mm	1095lm	665lm	○ 5000K	404515.B.P.C
COB LED	10W	ø80x72mm	1162lm	784lm	● 2700K	404522.B.P.C
COB LED	10W	ø80x72mm	1240lm	837lm	● 3000K	404523.B.P.C
COB LED	10W	ø80x72mm	1318lm	890lm	○ 4000K	404524.B.P.C
COB LED	10W	ø80x72mm	1369lm	924lm	○ 5000K	404525.B.P.C
COB LED Zigbee Smart	0-10W	ø82x72mm	0-1369lm	0-924lm	● 2700K - ○ 6500K	404526.B.5.C
COB LED	15W	ø80x85mm	1743lm	1098lm	● 2700K	404532.B.P.C
COB LED	15W	ø80x85mm	1860lm	1172lm	● 3000K	404533.B.P.C
COB LED	15W	ø80x85mm	2977lm	1246lm	○ 4000K	404534.B.P.C
COB LED	15W	ø80x85mm	2053lm	1294lm	○ 5000K	404535.B.P.C
COB LED	25W	ø105x85mm	2717lm	1761lm	● 2700K	404542.B.P.C
COB LED	25W	ø105x85mm	2900lm	1879lm	● 3000K	404543.B.P.C
COB LED	25W	ø105x85mm	3083lm	1998lm	○ 4000K	404544.B.P.C
COB LED	25W	ø105x85mm	3202lm	2075lm	○ 5000K	404545.B.P.C

Beam Angle: B(0-Fixed Degree)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black BB-Black/Black BW-Black/White)




4046

Downlight Recessed. Ambience/UGR

FLAREseries

Architectural INDOOR

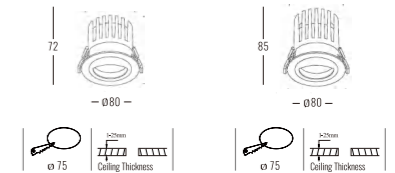

OSRAM 50,000hrs LED LM80 $R_a > 90$ UGR < 19 IP20 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink Fixed Beam Angle						
Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	ø80x72mm	1162lm	784lm	● 2700K	404612.B.P.C
COB LED	10W	ø80x72mm	1240lm	837lm	● 3000K	404613.B.P.C
COB LED	10W	ø80x72mm	1318lm	890lm	○ 4000K	404614.B.P.C
COB LED	10W	ø80x72mm	1369lm	924lm	○ 5000K	404615.B.P.C
COB LED Zigbee Smart	0-10W	ø82x72mm	0-1369lm	0-924lm	● 2700K - ○ 6500K	404616.B.5.C
COB LED	15W	ø80x85mm	1743lm	1098lm	● 2700K	404622.B.P.C
COB LED	15W	ø80x85mm	1860lm	1172lm	● 3000K	404623.B.P.C
COB LED	15W	ø80x85mm	1977lm	1246lm	○ 4000K	404624.B.P.C
COB LED	15W	ø80x85mm	2053lm	1294lm	○ 5000K	404625.B.P.C

Beam Angle: B(0-Fixed Degree)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)


Colour Finish: C(WW-White/White BW-Black/White BB-Black/Black)



4047

Downlight Recessed. Ambience/UGR

FLARE series

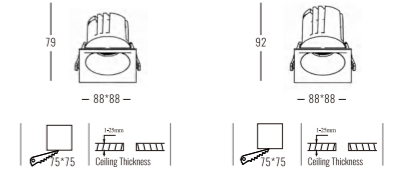

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	88x88x79mm	1162lm	910lm	● 2700K	404712.B.P.C
COB LED	10W	88x88x79mm	1240lm	971lm	● 3000K	404713.B.P.C
COB LED	10W	88x88x79mm	1318lm	1032lm	○ 4000K	404714.B.P.C
COB LED	10W	88x88x79mm	1369lm	1072lm	○ 5000K	404715.B.P.C
COB LED Zigbee Smart	0-10W	88x88x79mm	0-1369lm	0-1072lm	● 2700K - ○ 6500K	404716.B.5.C
COB LED	15W	88x88x92mm	1743lm	1274lm	● 2700K	404722.B.P.C
COB LED	15W	88x88x92mm	1860lm	1359lm	● 3000K	404723.B.P.C
COB LED	15W	88x88x92mm	1977lm	1445lm	○ 4000K	404724.B.P.C
COB LED	15W	88x88x92mm	2053lm	1501lm	○ 5000K	404725.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB--White/Black BB-Black/Black BW-Black/White BS-Black/Silver WS-White/Silver)




4048

Downlight Recessed. Ambience/UGR

FLAREseries

Architectural INDOOR

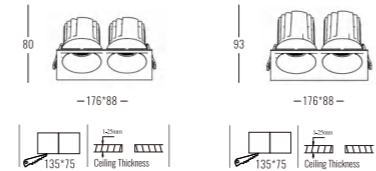

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	20W	176x88x80mm	2324lm	1820lm	● 2700K	404612.B.P.C
COB LED	20W	176x88x80mm	2480lm	1942lm	● 3000K	404613.B.P.C
COB LED	20W	176x88x80mm	2636lm	2064lm	○ 4000K	404614.B.P.C
COB LED	20W	176x88x80mm	2738lm	2144lm	○ 5000K	404615.B.P.C
COB LED Zigbee Smart	0-20W	176x88x80mm	0-2738lm	0-2144lm	● 2700K - ○ 6500K	404616.B.5.C
COB LED	30W	176x88x93mm	3486lm	2547lm	● 2700K	404622.B.P.C
COB LED	30W	176x88x93mm	3720lm	2719lm	● 3000K	404623.B.P.C
COB LED	30W	176x88x93mm	3954lm	2890lm	○ 4000K	404624.B.P.C
COB LED	30W	176x88x93mm	4107lm	3001lm	○ 5000K	404625.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB--White/Black BB-Black/Black BW-Black/White BS-Black/Silver WS-White/Silver)




4049

Downlight Recessed. Ambience/UGR

FLAREseries

Architectural INDOOR

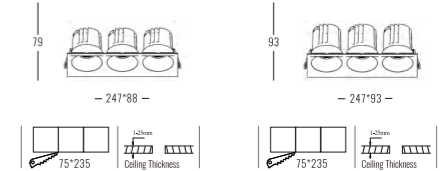

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	30W	247x88x79mm	3486lm	2729lm	● 2700K	404912.B.P.C
COB LED	30W	247x88x79mm	3720lm	2913lm	● 3000K	404913.B.P.C
COB LED	30W	247x88x79mm	3954lm	3096lm	○ 4000K	404914.B.P.C
COB LED	30W	247x88x79mm	4107lm	3216lm	○ 5000K	404915.B.P.C
COB LED	45W	247x93x93mm	5228lm	3821lm	● 2700K	404922.B.P.C
COB LED	45W	247x93x93mm	5580lm	4078lm	● 3000K	404923.B.P.C
COB LED	45W	247x93x93mm	5932lm	4335lm	○ 4000K	404924.B.P.C
COB LED	45W	247x93x93mm	6160lm	4502lm	○ 5000K	404925.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB--White/Black BB-Black/Black BW-Black/White BS-Black/Silver WS-White/Silver)




4020

Downlight Recessed. Ambience/UGR

LICHTERseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	ø85x95mm	1394lm	1067lm	● 2700K	402012.B.P.C
COB LED	12W	ø85x95mm	1488lm	1138lm	● 3000K	402013.B.P.C
COB LED	12W	ø85x95mm	1582lm	1210lm	○ 4000K	402014.B.P.C
COB LED	12W	ø85x95mm	1643lm	1257lm	○ 5000K	402015.B.P.C
COB LED Zigbee Smart	0-12W	ø85x95mm	0-1643lm	0-1257lm	● 2700K - ○ 6500K	402016.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




White/White White/Black

4021

Downlight Recessed. Ambience/UGR

LICHTERseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	ø82x95mm	1394lm	1092lm	● 2700K	402112.B.P.C
COB LED	12W	ø82x95mm	1488lm	1165lm	● 3000K	402113.B.P.C
COB LED	12W	ø82x95mm	1582lm	1239lm	○ 4000K	402114.B.P.C
COB LED	12W	ø82x95mm	1643lm	1286lm	○ 5000K	402115.B.P.C
COB LED Zigbee Smart	0-12W	ø82x95mm	0-1643lm	0-1286lm	● 2700K - ○ 6500K	402116.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black WS-White/Silver WG-Black/Golden)




White/White White/Black White/Silver Black/Golden

4022

Downlight Recessed. Ambience/UGR

LICHTERseries

ArchitecturalINDOOR



Ra >90 UGR <19 IP20 AC220-240V 50/60Hz Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	ø85x95mm	1394lm	941lm	● 2700K	402212.B.P.C
COB LED	12W	ø85x95mm	1488lm	1004lm	● 3000K	402213.B.P.C
COB LED	12W	ø85x95mm	1582lm	1068lm	○ 4000K	402214.B.P.C
COB LED	12W	ø85x95mm	1643lm	1109lm	○ 5000K	402215.B.P.C
COB LED Zigbee Smart	0-12W	ø85x95mm	0-1643lm	0-1109lm	● 2700K - ○ 6500K	402216.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black BW-Black/White)




4023

Downlight Recessed. Ambience/UGR

LICHTERseries

ArchitecturalINDOOR



Ra >90 UGR <19 IP20 AC220-240V 50/60Hz Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	ø85x95mm	1394lm	954lm	● 2700K	402312.B.P.C
COB LED	12W	ø85x95mm	1488lm	1018lm	● 3000K	402313.B.P.C
COB LED	12W	ø85x95mm	1582lm	1082lm	○ 4000K	402314.B.P.C
COB LED	12W	ø85x95mm	1643lm	1124lm	○ 5000K	402315.B.P.C
COB LED Zigbee Smart	0-12W	ø85x95mm	0-1643lm	0-1124lm	● 2700K - ○ 6500K	402316.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black BW-Black/White)




4024

Downlight Recessed. Ambience/UGR

LICHTERseries



ArchitecturalINDOOR




4025

Downlight Recessed. Ambience/UGR

LICHTERseries



ArchitecturalINDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	∅110x95mm	1394lm	1067lm	● 2700K	402412.B.P.C
COB LED	12W	∅110x95mm	1488lm	1138lm	● 3000K	402413.B.P.C
COB LED	12W	∅110x95mm	1582lm	1210lm	○ 4000K	402414.B.P.C
COB LED	12W	∅110x95mm	1643lm	1257lm	○ 5000K	402415.B.P.C
COB LED Zigbee Smart	0-12W	∅110x95mm	0-1643lm	0-1257lm	● 2700K - ○ 6500K	402416.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black WW-White/White BB-Black/Black)



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	88x88x100mm	1394lm	941lm	● 2700K	402512.B.P.C
COB LED	12W	88x88x100mm	1488lm	1004lm	● 3000K	402513.B.P.C
COB LED	12W	88x88x100mm	1582lm	1068lm	○ 4000K	402514.B.P.C
COB LED	12W	88x88x100mm	1643lm	1109lm	○ 5000K	402515.B.P.C
COB LED Zigbee Smart	0-12W	88x88x100mm	0-1643lm	0-1109lm	● 2700K - ○ 6500K	402516.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black WW-White/White BB-Black/Black)




4026

Downlight Recessed. Ambience/UGR

LICHTERseries



ArchitecturalINDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	∅110x95mm	1394lm	954lm	● 2700K	402612.B.P.C
COB LED	12W	∅110x95mm	1488lm	1018lm	● 3000K	402613.B.P.C
COB LED	12W	∅110x95mm	1582lm	1082lm	○ 4000K	402614.B.P.C
COB LED	12W	∅110x95mm	1643lm	1124lm	○ 5000K	402615.B.P.C
COB LED Zigbee Smart	0-12W	∅110x95mm	0-1643lm	0-1124lm	● 2700K - ○ 6500K	402616.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black WS-White/Silver WG-Black/Golden)




4027

Downlight Recessed. Ambience/UGR

LICHTERseries

ArchitecturalINDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	88x88x100mm	1394lm	1067lm	● 2700K	402712.B.P.C
COB LED	12W	88x88x100mm	1488lm	1138lm	● 3000K	402713.B.P.C
COB LED	12W	88x88x100mm	1582lm	1210lm	○ 4000K	402714.B.P.C
COB LED	12W	88x88x100mm	1643lm	1257lm	○ 5000K	402715.B.P.C
COB LED Zigbee Smart	0-12W	88x88x100mm	0-1643lm	0-1257lm	● 2700K - ○ 6500K	402716.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black WS-White/Silver BB-Black/Black BS-Black/Silver)




4028

Downlight Recessed. Ambience/UGR

LICHTERseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	24W	170x88x100mm	2789lm	2133lm	● 2700K	402812.B.P.C
COB LED	24W	170x88x100mm	2976lm	2277lm	● 3000K	402813.B.P.C
COB LED	24W	170x88x100mm	3163lm	2420lm	○ 4000K	402814.B.P.C
COB LED	24W	170x88x100mm	3286lm	2513lm	○ 5000K	402815.B.P.C
COB LED Zigbee Smart	0-24W	170x88x100mm	0-1643lm	0-2513lm	● 2700K - ○ 6500K	402816.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)


Colour Finish: C(WW-White/White WB-White/Black WS-White/Silver BB-Black/Black BS-Black/Silver)



4010

Downlight Recessed. Ambience/UGR

MOLDERseries



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	∅82x55mm	1162lm	910lm	● 2700K	401012.B.P.C
COB LED	10W	∅82x55mm	1240lm	971lm	● 3000K	401013.B.P.C
COB LED	10W	∅82x55mm	1318lm	1032lm	○ 4000K	401014.B.P.C
COB LED	10W	∅82x55mm	1369lm	1072lm	○ 5000K	401015.B.P.C
COB LED Zigbee Smart	0-10W	∅82x55mm	0-1369lm	0-1072lm	● 2700K - ○ 6500K	401016.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black WB-White/Black)




4011

Downlight Recessed. Ambience/UGR

MOLDER series



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	10W	ø82x55mm	1124lm	880lm	● 2700K	401112.B.P.C
SMD LED	10W	ø82x55mm	1200lm	940lm	● 3000K	401113.B.P.C
SMD LED	10W	ø82x55mm	1276lm	999lm	○ 4000K	401114.B.P.C
SMD LED	10W	ø82x55mm	1325lm	1037lm	○ 5000K	401115.B.P.C
SMD LED Zigbee Smart	0-10W	ø82x55mm	0-1325lm	0-1037lm	● 2700K - ○ 6500K	401116.B.5.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black)




4050

Downlight Recessed. Ambience/UGR

AVIO RICHT series

Architectural INDOOR

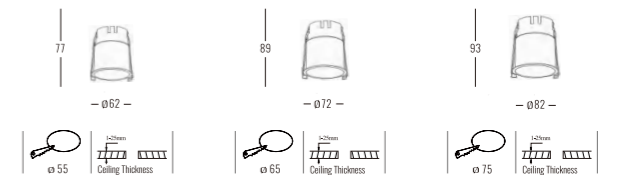

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	9W	ø62x77mm	1046lm	711lm	● 2700K	405012.B.P.C
COB LED	9W	ø62x77mm	1116lm	759lm	● 3000K	405013.B.P.C
COB LED	9W	ø62x77mm	1186lm	807lm	○ 4000K	405014.B.P.C
COB LED	9W	ø62x77mm	1232lm	838lm	○ 5000K	405015.B.P.C
COB LED Zigbee Smart	0-9W	ø62x77mm	0-1232lm	0-838lm	● 2700K - ○ 6500K	405016.B.5.C
COB LED	12W	ø72x89mm	1394lm	1067lm	● 2700K	405022.B.P.C
COB LED	12W	ø72x89mm	1488lm	1138lm	● 3000K	405023.B.P.C
COB LED	12W	ø72x89mm	1582lm	1210lm	○ 4000K	405024.B.P.C
COB LED	12W	ø72x89mm	1643lm	1257lm	○ 5000K	405025.B.P.C
COB LED Zigbee Smart	0-12W	ø72x89mm	0-1643lm	0-1257lm	● 2700K - ○ 6500K	405026.B.5.C
COB LED	15W	ø82x93mm	1743lm	1244lm	● 2700K	405032.B.P.C
COB LED	15W	ø82x93mm	1860lm	1328lm	● 3000K	405033.B.P.C
COB LED	15W	ø82x93mm	1977lm	1412lm	○ 4000K	405034.B.P.C
COB LED	15W	ø82x93mm	2053lm	1466lm	○ 5000K	405035.B.P.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black BB-Black/Black)




4051

Downlight Recessed. Ambience/UGR

AVIO RICHTseries

ArchitecturalINDOOR

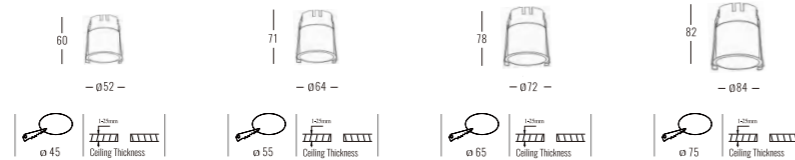

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	Ø52x60mm	581lm	427lm	● 2700K	405112.B.P.C
COB LED	5W	Ø52x60mm	620lm	455lm	● 3000K	405113.B.P.C
COB LED	5W	Ø52x60mm	659lm	484lm	○ 4000K	405114.B.P.C
COB LED	5W	Ø52x60mm	684lm	503lm	○ 5000K	405115.B.P.C
COB LED	7W	Ø64x71mm	813lm	569lm	● 2700K	405122.B.P.C
COB LED	7W	Ø64x71mm	868lm	607lm	● 3000K	405123.B.P.C
COB LED	7W	Ø64x71mm	923lm	645lm	○ 4000K	405124.B.P.C
COB LED	7W	Ø64x71mm	958lm	670lm	○ 5000K	405125.B.P.C
COB LED Zigbee Smart	0-7W	Ø64x71mm	0-958lm	0-670lm	● 2700K - ○ 6500K	405126.B.5.C
COB LED	9W	Ø72x78mm	1046lm	711lm	● 2700K	405132.B.P.C
COB LED	9W	Ø72x78mm	1116lm	759lm	● 3000K	405133.B.P.C
COB LED	9W	Ø72x78mm	1186lm	807lm	○ 4000K	405134.B.P.C
COB LED	9W	Ø72x78mm	1232lm	838lm	○ 5000K	405135.B.P.C
COB LED Zigbee Smart	0-9W	Ø72x78mm	0-1232lm	0-838lm	● 2700K - ○ 6500K	405136.B.5.C
COB LED	12W	Ø84x82mm	1394lm	1067lm	● 2700K	405142.B.P.C
COB LED	12W	Ø84x82mm	1488lm	1138lm	● 3000K	405143.B.P.C
COB LED	12W	Ø84x82mm	1582lm	1210lm	○ 4000K	405144.B.P.C
COB LED	12W	Ø84x82mm	1643lm	1257lm	○ 5000K	405145.B.P.C
COB LED Zigbee Smart	0-12W	Ø84x82mm	0-1643lm	0-1257lm	● 2700K - ○ 6500K	405146.B.5.C

Beam Angle: B 40511/40512(1-15° 2-24° 3-36°) 40513/40514(1-24° 2-36° 3-60°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4052

Downlight Recessed. Ambience/UGR

AVIO RICHTseries

ArchitecturalINDOOR

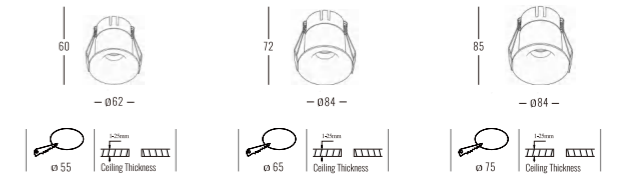

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	7W	Ø62x60mm	813lm	555lm	● 2700K	405212.B.P.C
COB LED	7W	Ø62x60mm	868lm	593lm	● 3000K	405213.B.P.C
COB LED	7W	Ø62x60mm	923lm	630lm	○ 4000K	405214.B.P.C
COB LED	7W	Ø62x60mm	958lm	654lm	○ 5000K	405215.B.P.C
COB LED Zigbee Smart	0-7W	Ø62x60mm	0-958lm	0-654lm	● 2700K - ○ 6500K	405216.B.5.C
COB LED	9W	Ø84x72mm	1046lm	694lm	2700K	405222.B.P.C
COB LED	9W	Ø84x72mm	1116lm	741lm	3000K	405223.B.P.C
COB LED	9W	Ø84x72mm	1186lm	788lm	4000K	405224.B.P.C
COB LED	9W	Ø84x72mm	1232lm	818lm	5000K	405225.B.P.C
COB LED Zigbee Smart	0-9W	Ø84x72mm	0-1232lm	0-818lm	● 2700K - ○ 6500K	405226.B.5.C
COB LED	12W	Ø84x85mm	1394lm	972lm	2700K	405232.B.P.C
COB LED	12W	Ø84x85mm	1488lm	1037lm	3000K	405233.B.P.C
COB LED	12W	Ø84x85mm	1582lm	1103lm	4000K	405234.B.P.C
COB LED	12W	Ø84x85mm	1643lm	1145lm	5000K	405235.B.P.C
COB LED Zigbee Smart	0-12W	Ø84x85mm	0-1643lm	0-1145lm	● 2700K - ○ 6500K	405236.B.5.C

Beam Angle: B 40521(1-15° 2-24° 3-36° 4-60°) 40522/40523(1-24° 2-36° 3-60°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black BB-Black/Black)




4053

Downlight Recessed. Ambience/UGR

AVIO RICHTseries

ArchitecturalINDOOR

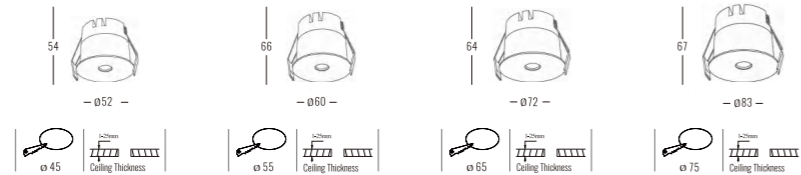

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	Ø52x54mm	581lm	402lm	● 2700K	405312.B.P.C
COB LED	5W	Ø52x54mm	620lm	429lm	● 3000K	405313.B.P.C
COB LED	5W	Ø52x54mm	659lm	456lm	○ 4000K	405314.B.P.C
COB LED	5W	Ø52x54mm	684lm	473lm	○ 5000K	405315.B.P.C
COB LED	7W	Ø60x66mm	813lm	535lm	● 2700K	405322.B.P.C
COB LED	7W	Ø60x66mm	868lm	571lm	● 3000K	405323.B.P.C
COB LED	7W	Ø60x66mm	923lm	607lm	○ 4000K	405324.B.P.C
COB LED	7W	Ø60x66mm	958lm	631lm	○ 5000K	405325.B.P.C
COB LED Zigbee Smart	0-7W	Ø60x66mm	0-958lm	0-631lm	● 2700K - ○ 6500K	405326.B.5.C
COB LED	9W	Ø72x64mm	1046lm	669lm	● 2700K	405332.B.P.C
COB LED	9W	Ø72x64mm	1116lm	714lm	● 3000K	405333.B.P.C
COB LED	9W	Ø72x64mm	1186lm	759lm	○ 4000K	405334.B.P.C
COB LED	9W	Ø72x64mm	1232lm	789lm	○ 5000K	405335.B.P.C
COB LED Zigbee Smart	0-9W	Ø72x64mm	0-1232lm	0-789lm	● 2700K - ○ 6500K	405336.B.5.C
COB LED	12W	Ø83x67mm	1394lm	937lm	● 2700K	405342.B.P.C
COB LED	12W	Ø83x67mm	1488lm	1000lm	● 3000K	405343.B.P.C
COB LED	12W	Ø83x67mm	1582lm	1063lm	○ 4000K	405344.B.P.C
COB LED	12W	Ø83x67mm	1643lm	1104lm	○ 5000K	405345.B.P.C
COB LED Zigbee Smart	0-12W	Ø83x67mm	0-1643lm	0-1104lm	● 2700K - ○ 6500K	405346.B.5.C

Beam Angle: B 40531/40532(1-15° 2-24° 3-36°) 40533/40534(1-24° 2-36° 3-60°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim 5-Zigbee Smart)

Colour Finish: C(WW-White/White BB-Black/Black)




Für allgemeine Anfragen, technischen Support oder Informationen zur Treiberkompatibilität – www.pochelicht.de.
For general enquiries, technical support, or driver compatibility details – www.pochelicht.de.

4054

Downlight Recessed. Ambience/UGR

AVIO RICHTseries

ArchitecturalINDOOR

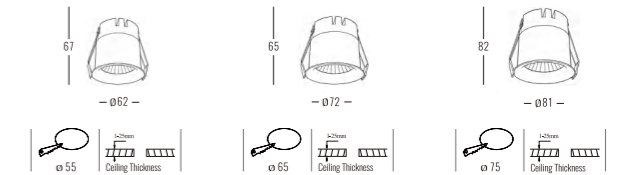

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	8W	Ø62x67mm	813lm	569lm	● 2700K	405412.B.P.C
COB LED	8W	Ø62x67mm	868lm	607lm	● 3000K	405413.B.P.C
COB LED	8W	Ø62x67mm	923lm	645lm	○ 4000K	405414.B.P.C
COB LED	8W	Ø62x67mm	958lm	670lm	○ 5000K	405415.B.P.C
COB LED	10W	Ø72x65mm	1046lm	711lm	● 2700K	405422.B.P.C
COB LED	10W	Ø72x65mm	1116lm	759lm	● 3000K	405423.B.P.C
COB LED	10W	Ø72x65mm	1186lm	807lm	○ 4000K	405424.B.P.C
COB LED	10W	Ø72x65mm	1232lm	838lm	○ 5000K	405425.B.P.C
COB LED Zigbee Smart	0-10W	Ø72x65mm	0-1232lm	0-838lm	● 2700K - ○ 6500K	405426.B.5.C
COB LED	15W	Ø81x82mm	1394lm	995lm	● 2700K	405432.B.P.C
COB LED	15W	Ø81x82mm	1488lm	1062lm	● 3000K	405433.B.P.C
COB LED	15W	Ø81x82mm	1582lm	1129lm	○ 4000K	405434.B.P.C
COB LED	15W	Ø81x82mm	1643lm	1173lm	○ 5000K	405435.B.P.C

Beam Angle: B 40541(1-15° 2-24° 3-36° 4-60°) 40542/40543(1-24° 2-36° 3-60°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/Black)




Für allgemeine Anfragen, technischen Support oder Informationen zur Treiberkompatibilität – www.pochelicht.de.
For general enquiries, technical support, or driver compatibility details – www.pochelicht.de.

4840

Downlight Recessed. Ambience/UGR

PREMIUM series

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	Ø81x80.5mm	1394lm	972lm	● 2700K	484012.B.P.C
COB LED	12W	Ø81x80.5mm	1488lm	1046lm	● 3000K	484013.B.P.C
COB LED	12W	Ø81x80.5mm	1582lm	1103lm	○ 4000K	484014.B.P.C
COB LED	12W	Ø81x80.5mm	1643lm	1145lm	○ 5000K	484015.B.P.C
COB LED Zigbee Smart	0-12W	Ø81x80.5mm	0-1643lm	0-1145lm	● 2700K - ○ 6500K	484016.B.5.C

Beam Angle: B(1-10° 2-15° 3-24° 4-36° 5-55°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black BB-Black/Black)




4050

Downlight Recessed. Ambience/UGR

FLECK series

Architectural INDOOR

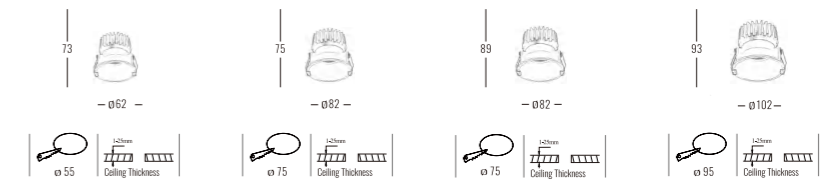

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	Ø62x73mm	581lm	421lm	● 2700K	405012.B.P.C
COB LED	5W	Ø62x73mm	620lm	449lm	● 3000K	405013.B.P.C
COB LED	5W	Ø62x73mm	659lm	477lm	○ 4000K	405014.B.P.C
COB LED	5W	Ø62x73mm	684lm	495lm	○ 5000K	405015.B.P.C
COB LED	10W	Ø82x75mm	1068lm	836lm	● 2700K	405022.B.P.C
COB LED	10W	Ø82x75mm	1140lm	893lm	● 3000K	405023.B.P.C
COB LED	10W	Ø82x75mm	1212lm	949lm	○ 4000K	405024.B.P.C
COB LED	10W	Ø82x75mm	1259lm	985lm	○ 5000K	405025.B.P.C
COB LED Zigbee Smart	0-10W	Ø82x75mm	0-1259lm	0-985lm	● 2700K - ○ 6500K	405036.B.5.C
COB LED	15W	Ø82x89mm	1743lm	1274lm	● 2700K	405032.B.P.C
COB LED	15W	Ø82x89mm	1860lm	1359lm	● 3000K	405033.B.P.C
COB LED	15W	Ø82x89mm	2977lm	1445lm	○ 4000K	405034.B.P.C
COB LED	15W	Ø82x89mm	2053lm	1501lm	○ 5000K	405035.B.P.C
COB LED	18W	Ø102x93mm	1923lm	1505lm	● 2700K	405042.B.P.C
COB LED	18W	Ø102x93mm	2052lm	1607lm	● 3000K	405043.B.P.C
COB LED	18W	Ø102x93mm	2181lm	1708lm	○ 4000K	405044.B.P.C
COB LED	18W	Ø102x93mm	2265lm	1774lm	○ 5000K	405045.B.P.C
COB LED Zigbee Smart	0-18W	Ø102x93mm	0-2265lm	0-473lm	● 2700K - ○ 6500K	405046.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black BB-Black/Black)




4051

Downlight Recessed. Ambience/UGR

FLECKseries

Architectural INDOOR

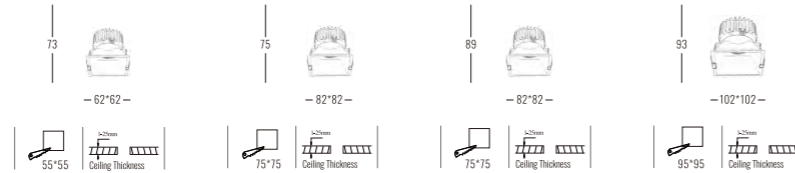

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	62x62x73mm	581lm	437lm	● 2700K	405112.B.P.C
COB LED	5W	62x62x73mm	620lm	466lm	● 3000K	405113.B.P.C
COB LED	5W	62x62x73mm	659lm	495lm	○ 4000K	405114.B.P.C
COB LED	5W	62x62x73mm	684lm	515lm	○ 5000K	405115.B.P.C
COB LED	10W	82x82x75mm	1068lm	836lm	● 2700K	405122.B.P.C
COB LED	10W	82x82x75mm	1140lm	893lm	● 3000K	405123.B.P.C
COB LED	10W	82x82x75mm	1212lm	949lm	○ 4000K	405124.B.P.C
COB LED	10W	82x82x75mm	1259lm	985lm	○ 5000K	405125.B.P.C
COB LED Zigbee Smart	0-10W	82x82x75mm	0-1259lm	0-985lm	● 2700K - ○ 6500K	405126.B.5.C
COB LED	15W	82x82x89mm	1630lm	1191lm	● 2700K	405132.B.P.C
COB LED	15W	82x82x89mm	1740lm	1272lm	● 3000K	405133.B.P.C
COB LED	15W	82x82x89mm	1850lm	1352lm	○ 4000K	405134.B.P.C
COB LED	15W	82x82x89mm	1921lm	1404lm	○ 5000K	405135.B.P.C
COB LED	18W	102x102x93mm	2108lm	1651lm	● 2700K	405142.B.P.C
COB LED	18W	102x102x93mm	2250lm	1762lm	● 3000K	405143.B.P.C
COB LED	18W	102x102x93mm	2392lm	1873lm	○ 4000K	405144.B.P.C
COB LED	18W	102x102x93mm	2484lm	1945lm	○ 5000K	405145.B.P.C
COB LED Zigbee Smart	0-18W	102x102x93mm	0-2484lm	0-1945lm	● 2700K - ○ 6500K	405146.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black BB-Black/Black)




4052

Downlight Recessed. Ambience/UGR

FLECKseries

Architectural INDOOR

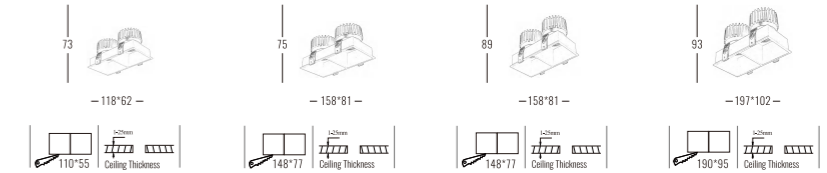

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	118x62x73mm	1087lm	851lm	● 2700K	405212.B.P.C
COB LED	10W	118x62x73mm	1160lm	908lm	● 3000K	405213.B.P.C
COB LED	10W	118x62x73mm	1233lm	966lm	○ 4000K	405214.B.P.C
COB LED	10W	118x62x73mm	1281lm	1003lm	○ 5000K	405215.B.P.C
COB LED	18W	158x81x75mm	2091lm	1638lm	● 2700K	405222.B.P.C
COB LED	18W	158x81x75mm	2232lm	1748lm	● 3000K	405223.B.P.C
COB LED	18W	158x81x75mm	2373lm	1858lm	○ 4000K	405224.B.P.C
COB LED	18W	158x81x75mm	2464lm	1929lm	○ 5000K	405225.B.P.C
COB LED Zigbee Smart	0-18W	158x81x75mm	0-2464lm	0-1929lm	● 2700K - ○ 6500K	405226.B.5.C
COB LED	30W	158x81x89mm	3205lm	2342lm	● 2700K	405232.B.P.C
COB LED	30W	158x81x89mm	3420lm	2499lm	● 3000K	405233.B.P.C
COB LED	30W	158x81x89mm	3635lm	2657lm	○ 4000K	405234.B.P.C
COB LED	30W	158x81x89mm	3776lm	2759lm	○ 5000K	405235.B.P.C
COB LED	36W	197x102x93mm	4217lm	3118lm	● 2700K	405242.B.P.C
COB LED	36W	197x102x93mm	4500lm	3328lm	● 3000K	405243.B.P.C
COB LED	36W	197x102x93mm	4784lm	3537lm	○ 4000K	405244.B.P.C
COB LED	36W	197x102x93mm	4968lm	3674lm	○ 5000K	405245.B.P.C
COB LED Zigbee Smart	0-36W	197x102x93mm	0-4968lm	0-3674lm	● 2700K - ○ 6500K	405246.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4450

Downlight Recessed. Ambience/UGR

CLOUDseries

Architectural INDOOR

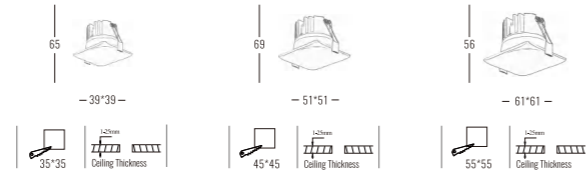

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	39x39x65mm	581lm	437lm	● 2700K	445012.B.P.C
COB LED	5W	39x39x65mm	620lm	466lm	● 3000K	445013.B.P.C
COB LED	5W	39x39x65mm	659lm	495lm	○ 4000K	445014.B.P.C
COB LED	5W	39x39x65mm	684lm	515lm	○ 5000K	445015.B.P.C
COB LED	8W	51x51x69mm	930lm	655lm	● 2700K	445022.B.P.C
COB LED	8W	51x51x69mm	992lm	699lm	● 3000K	445023.B.P.C
COB LED	8W	51x51x69mm	1054lm	743lm	○ 4000K	445024.B.P.C
COB LED	8W	51x51x69mm	1095lm	772lm	○ 5000K	445025.B.P.C
COB LED Zigbee Smart	0-8W	51x51x69mm	0-1095lm	0-772lm	● 2700K - ○ 6500K	445026.B.5.C
COB LED	10W	61x61x56mm	1162lm	801lm	● 2700K	445032.B.P.C
COB LED	10W	61x61x56mm	1240lm	854lm	● 3000K	445033.B.P.C
COB LED	10W	61x61x56mm	1318lm	908lm	○ 4000K	445034.B.P.C
COB LED	10W	61x61x56mm	1369lm	943lm	○ 5000K	445035.B.P.C
COB LED Zigbee Smart	0-10W	61x61x56mm	0-1369lm	0-943lm	● 2700K - ○ 6500K	445036.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)



4450

Downlight Recessed. Ambience/UGR

CLOUDseries

Architectural INDOOR




Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	61x61x71mm	1394lm	1092lm	● 2700K	445042.B.P.C
COB LED	12W	61x61x71mm	1488lm	1165lm	● 3000K	445043.B.P.C
COB LED	12W	61x61x71mm	1582lm	1239lm	○ 4000K	445044.B.P.C
COB LED	12W	61x61x71mm	1643lm	1286lm	○ 5000K	445045.B.P.C
COB LED Zigbee Smart	0-12W	61x61x71mm	0-1643lm	0-1286lm	● 2700K - ○ 6500K	405046.B.5.C
COB LED	10W	89x89x67mm	1162lm	801lm	● 2700K	445052.B.P.C
COB LED	10W	89x89x67mm	1240lm	854lm	● 3000K	445053.B.P.C
COB LED	10W	89x89x67mm	1318lm	908lm	○ 4000K	445054.B.P.C
COB LED	10W	89x89x67mm	1369lm	943lm	○ 5000K	445055.B.P.C
COB LED	12W	89x89x73mm	1394lm	983lm	● 2700K	445062.B.P.C
COB LED	12W	89x89x73mm	1488lm	1049lm	● 3000K	445063.B.P.C
COB LED	12W	89x89x73mm	1582lm	1115lm	○ 4000K	445064.B.P.C
COB LED	12W	89x89x73mm	1643lm	1158lm	○ 5000K	445065.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)


Colour Finish: C(WW-White/White BB-Black/Black)



4451

Downlight Recessed. Ambience/UGR

CLOUDseries

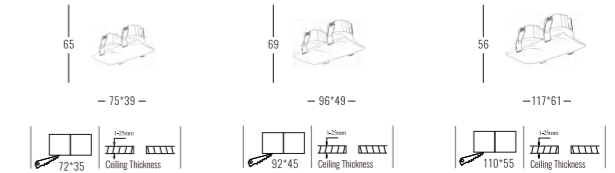

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2*5W	75x39x65mm	1162lm	801lm	● 2700K	445112.B.P.C
COB LED	2*5W	75x39x65mm	1240lm	854lm	● 3000K	445113.B.P.C
COB LED	2*5W	75x39x65mm	1318lm	908lm	○ 4000K	445114.B.P.C
COB LED	2*5W	75x39x65mm	1369lm	943lm	○ 5000K	445115.B.P.C
COB LED	2*8W	96x49x69mm	1859lm	1274lm	● 2700K	445122.B.P.C
COB LED	2*8W	96x49x69mm	1984lm	1359lm	● 3000K	445123.B.P.C
COB LED	2*8W	96x49x69mm	2109lm	1445lm	○ 4000K	445124.B.P.C
COB LED	2*8W	96x49x69mm	2190lm	1501lm	○ 5000K	445125.B.P.C
COB LED	2*10W	117x61x56mm	2324lm	1638lm	● 2700K	445132.B.P.C
COB LED	2*10W	117x61x56mm	2480lm	1748lm	● 3000K	445133.B.P.C
COB LED	2*10W	117x61x56mm	2636lm	1858lm	○ 4000K	445134.B.P.C
COB LED	2*10W	117x61x56mm	2738lm	1929lm	○ 5000K	445135.B.P.C
COB LED Zigbee Smart	0-20W	117x61x56mm	0-2738m	0-1929lm	● 2700K - ○ 6500K	445136.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4451

Downlight Recessed. Ambience/UGR

CLOUDseries

Architectural INDOOR

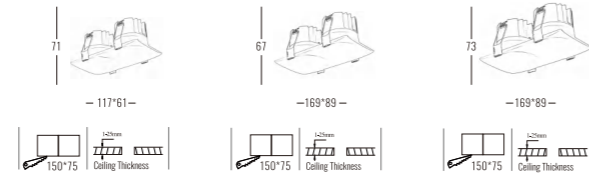

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2*12W	117x61x71mm	2789lm	2183lm	● 2700K	404412.B.P.C
COB LED	2*12W	117x61x71mm	2976lm	2330lm	● 3000K	404413.B.P.C
COB LED	2*12W	117x61x71mm	3163lm	2477lm	○ 4000K	404414.B.P.C
COB LED	2*12W	117x61x71mm	3286lm	2573lm	○ 5000K	404415.B.P.C
COB LED Zigbee Smart	0-24W	117x61x71mm	0-3286lm	0-2573lm	● 2700K - ○ 6500K	404416.B.5.C
COB LED	2*12W	169x89x67mm	2789lm	1638lm	● 2700K	404422.B.P.C
COB LED	2*12W	169x89x67mm	2976lm	1748lm	● 3000K	404423.B.P.C
COB LED	2*12W	169x89x67mm	3163lm	1858lm	○ 4000K	404424.B.P.C
COB LED	2*12W	169x89x67mm	3286lm	1929lm	○ 5000K	404425.B.P.C
COB LED	2*15W	169x89x73mm	3486lm	2547lm	● 2700K	404432.B.P.C
COB LED	2*15W	169x89x73mm	3720lm	2719lm	● 3000K	404433.B.P.C
COB LED	2*15W	169x89x73mm	3954lm	2890lm	○ 4000K	404434.B.P.C
COB LED	2*15W	169x89x73mm	4107lm	3001lm	○ 5000K	404435.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4720

Downlight Recessed. Ambience/UGR

OPTIXseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	55x55x45mm	656lm	453lm	● 2700K	472012.B.P.C
COB LED	5W	55x55x45mm	700lm	484lm	● 3000K	472013.B.P.C
COB LED	5W	55x55x45mm	744lm	514lm	○ 4000K	472014.B.P.C
COB LED	5W	55x55x45mm	773lm	534lm	○ 5000K	472015.B.P.C

Beam Angle: B(1-50° 2-80°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW-White/White BB-Black/Black)




4721

Downlight Recessed. Ambience/UGR

OPTIXseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	130x55x45mm	1574lm	1204lm	● 2700K	472112.B.P.C
COB LED	12W	130x55x45mm	1680lm	1285lm	● 3000K	472113.B.P.C
COB LED	12W	130x55x45mm	1786lm	1366lm	○ 4000K	472114.B.P.C
COB LED	12W	130x55x45mm	1855lm	1419lm	○ 5000K	472115.B.P.C
COB LED Zigbee Smart	0-12W	130x55x45mm	0-1855lm	0-1419lm	● 2700K - ○ 6500K	472116.B.5.C

Beam Angle: B(1-50° 2-80°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4722

Downlight Recessed. Ambience/UGR

OPTIXseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	15W	93x93x45mm	1968lm	1405lm	● 2700K	472212.B.P.C
COB LED	15W	93x93x45mm	2100lm	1499lm	● 3000K	472213.B.P.C
COB LED	15W	93x93x45mm	2232lm	1594lm	○ 4000K	472214.B.P.C
COB LED	15W	93x93x45mm	2318lm	1655lm	○ 5000K	472215.B.P.C

Beam Angle: B(1-50° 2-80°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4723

Downlight Recessed. Ambience/UGR

OPTIXseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	20W	205x55x45mm	2624lm	2007lm	● 2700K	472312.B.P.C
COB LED	20W	205x55x45mm	2800lm	2142lm	● 3000K	472313.B.P.C
COB LED	20W	205x55x45mm	2976lm	2277lm	○ 4000K	472314.B.P.C
COB LED	20W	205x55x45mm	3091lm	2365lm	○ 5000K	472315.B.P.C
COB LED Zigbee Smart	0-20W	205x55x45mm	0-3091lm	0-2365lm	● 2700K - ○ 6500K	472316.B.5.C

Beam Angle: B(1-50° 2-80°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4724

Downlight Recessed. Ambience/UGR

OPTIXseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	35W	130x130x45mm	4591lm	3412lm	● 2700K	472412.B.P.C
COB LED	35W	130x130x45mm	4900lm	3641lm	● 3000K	472413.B.P.C
COB LED	35W	130x130x45mm	5209lm	3871lm	○ 4000K	472414.B.P.C
COB LED	35W	130x130x45mm	5410lm	4020lm	○ 5000K	472415.B.P.C

Beam Angle: B(1-50° 2-80°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4725

Downlight Recessed. Ambience/UGR

OPTIXseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	42W	395x55x45mm	5510lm	4014lm	● 2700K	472512.B.P.C
COB LED	42W	395x55x45mm	5880lm	4284lm	● 3000K	472513.B.P.C
COB LED	42W	395x55x45mm	6250lm	4554lm	○ 4000K	472514.B.P.C
COB LED	42W	395x55x45mm	6492lm	4730lm	○ 5000K	472515.B.P.C

Beam Angle: B(1-50° 2-80°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4726

Downlight Recessed. Ambience/UGR

OPTIXseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	142x70x48mm	1574lm	1204lm	● 2700K	472612.B.P.C
COB LED	12W	142x70x48mm	1686lm	1285lm	● 3000K	472613.B.P.C
COB LED	12W	142x70x48mm	1786lm	1366lm	○ 4000K	472614.B.P.C
COB LED	12W	142x70x48mm	1855lm	1419lm	○ 5000K	472615.B.P.C
COB LED Zigbee Smart	0-12W	142x70x48mm	0-1855lm	0-1419lm	● 2700K - ○ 6500K	472616.B.5.C

Beam Angle: B(1-50° 2-80°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4727

Downlight Recessed. Ambience/UGR

OPTIXseries

Architectural INDOOR



Ra >90 UGR <19 IP20 AC220-240V 50/60Hz Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	20W	218x70x50mm	2624lm	1806lm	● 2700K	472712.B.P.C
COB LED	20W	218x70x50mm	2800lm	1928lm	● 3000K	472713.B.P.C
COB LED	20W	218x70x50mm	2976lm	2049lm	○ 4000K	472714.B.P.C
COB LED	20W	218x70x50mm	3091lm	2128lm	○ 5000K	472715.B.P.C
COB LED Zigbee Smart	0-20W	218x70x50mm	0-3091lm	0-2128lm	● 2700K - ○ 6500K	472716.B.5.C

Beam Angle: B(1-50° 2-80°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4847

Downlight Recessed. Ambience/UGR

PRISMAseries

Architectural INDOOR

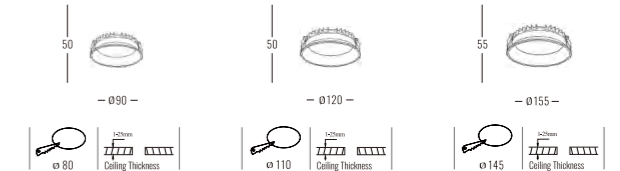

Ra >90 UGR <19 IP20 AC220-240V 50/60Hz Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	7W	∅90x50mm	885lm	583lm	● 2700K	484712.B.P.C
SMD LED	7W	∅90x50mm	945lm	622lm	● 3000K	484713.B.P.C
SMD LED	7W	∅90x50mm	1005lm	661lm	○ 4000K	484714.B.P.C
SMD LED	7W	∅90x50mm	1043lm	687lm	○ 5000K	484715.B.P.C
SMD LED	12W	∅120x50mm	1518lm	1020lm	● 2700K	484722.B.P.C
SMD LED	12W	∅120x50mm	1620lm	1089lm	● 3000K	484723.B.P.C
SMD LED	12W	∅120x50mm	1722lm	1157lm	○ 4000K	484724.B.P.C
SMD LED	12W	∅120x50mm	1788lm	1202lm	○ 5000K	484725.B.P.C
SMD LED Zigbee Smart	0-12W	∅120x50mm	0-1788lm	0-1202lm	● 2700K - ○ 6500K	484726.B.5.C
SMD LED	18W	∅155x55mm	2277lm	1639lm	● 2700K	484732.B.P.C
SMD LED	18W	∅155x55mm	2430lm	1750lm	● 3000K	484733.B.P.C
SMD LED	18W	∅155x55mm	2583lm	1860lm	○ 4000K	484734.B.P.C
SMD LED	18W	∅155x55mm	2683lm	1932lm	○ 5000K	484735.B.P.C
SMD LED Zigbee Smart	0-18W	∅155x55mm	0-2683lm	0-1932lm	● 2700K - ○ 6500K	484736.B.5.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White)




4847

Downlight Recessed. Ambience/UGR

PRISMA series

Architectural INDOOR

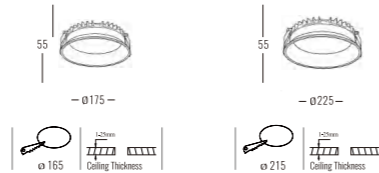

OSRAM 50,000hrs LED LM80 Fixed Ra >90 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	24W	Ø175x55mm	3036lm	2004lm	● 2700K	484742.B.P.C
SMD LED	24W	Ø175x55mm	3240lm	2138lm	● 3000K	484743.B.P.C
SMD LED	24W	Ø175x55mm	3444lm	2273lm	○ 4000K	484744.B.P.C
SMD LED	24W	Ø175x55mm	3577lm	2361lm	○ 5000K	484745.B.P.C
SMD LED	30W	Ø225x55mm	3795lm	2550lm	● 2700K	484752.B.P.C
SMD LED	30W	Ø225x55mm	4050lm	2722lm	● 3000K	484753.B.P.C
SMD LED	30W	Ø225x55mm	4305lm	2893lm	○ 4000K	484754.B.P.C
SMD LED	30W	Ø225x55mm	4471lm	3005lm	○ 5000K	484755.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White)




4848

Downlight Recessed. Ambience/UGR

PRISMA series

Architectural INDOOR

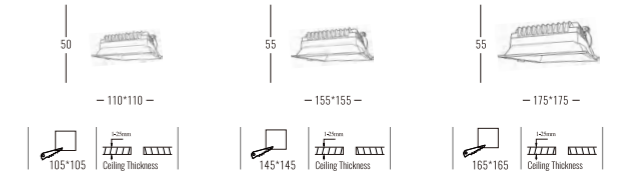

OSRAM 50,000hrs LED LM80 Fixed Ra >90 UGR <19 IP20 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	12W	110x110x50mm	1518lm	1020lm	● 2700K	484812.B.P.C
SMD LED	12W	110x110x50mm	1620lm	1089lm	● 3000K	484813.B.P.C
SMD LED	12W	110x110x50mm	1722lm	1157lm	○ 4000K	484814.B.P.C
SMD LED	12W	110x110x50mm	1788lm	1202lm	○ 5000K	484815.B.P.C
SMD LED Zigbee Smart	0-12W	110x110x50mm	0-1788lm	0-1202lm	● 2700K - ○ 6500K	484816.B.5.C
SMD LED	18W	155x155x55mm	2277lm	1639lm	● 2700K	484822.B.P.C
SMD LED	18W	155x155x55mm	2430lm	1750lm	● 3000K	484823.B.P.C
SMD LED	18W	155x155x55mm	2583lm	1860lm	○ 4000K	484824.B.P.C
SMD LED	18W	155x155x55mm	2683lm	1932lm	○ 5000K	484825.B.P.C
SMD LED Zigbee Smart	0-18W	155x155x55mm	0-2683lm	0-1932lm	● 2700K - ○ 6500K	484826.B.5.C
SMD LED	24W	175x175x55mm	3036lm	2004lm	● 2700K	484832.B.P.C
SMD LED	24W	175x175x55mm	3240lm	2138lm	● 3000K	484833.B.P.C
SMD LED	24W	175x175x55mm	3444lm	2273lm	○ 4000K	484834.B.P.C
SMD LED	24W	175x175x55mm	3577lm	2361lm	○ 5000K	484835.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White)




4845

Downlight Recessed. Ambience/UGR

GLOBUSseries

Architectural INDOOR

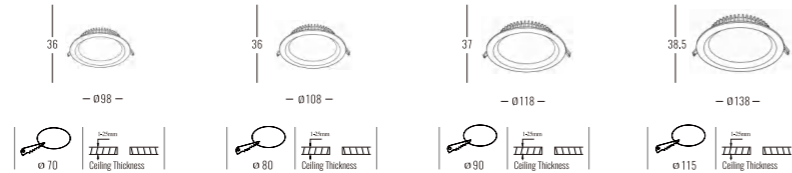

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	Ø98x36mm	379lm	261lm	● 2700K	484512.B.P.C
SMD LED	3W	Ø98x36mm	405lm	279lm	● 3000K	484513.B.P.C
SMD LED	3W	Ø98x36mm	431lm	297lm	○ 4000K	484514.B.P.C
SMD LED	3W	Ø98x36mm	447lm	308lm	○ 5000K	484515.B.P.C
<hr/>						
SMD LED	5W	Ø108x36mm	632lm	411lm	● 2700K	484522.B.P.C
SMD LED	5W	Ø108x36mm	675lm	438lm	● 3000K	484523.B.P.C
SMD LED	5W	Ø108x36mm	718lm	466lm	○ 4000K	484524.B.P.C
SMD LED	5W	Ø108x36mm	745lm	484lm	○ 5000K	484525.B.P.C
<hr/>						
SMD LED	7W	Ø118x37mm	885lm	597lm	● 2700K	484532.B.P.C
SMD LED	7W	Ø118x37mm	945lm	638lm	● 3000K	484533.B.P.C
SMD LED	7W	Ø118x37mm	1005lm	678lm	○ 4000K	484534.B.P.C
SMD LED	7W	Ø118x37mm	1043lm	704lm	○ 5000K	484535.B.P.C
<hr/>						
SMD LED	9W	Ø138x38.5mm	1138lm	747lm	● 2700K	484542.B.P.C
SMD LED	9W	Ø138x38.5mm	1215lm	797lm	● 3000K	484543.B.P.C
SMD LED	9W	Ø138x38.5mm	1292lm	847lm	○ 4000K	484544.B.P.C
SMD LED	9W	Ø138x38.5mm	1341lm	880lm	○ 5000K	484545.B.P.C
SMD LED Zigbee Smart	0-9W	Ø138x38.5mm	0-1341lm	0-880lm	● 2700K - ○ 6500K	484546.B.5.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White)




4845

Downlight Recessed. Ambience/UGR

GLOBUSseries

Architectural INDOOR

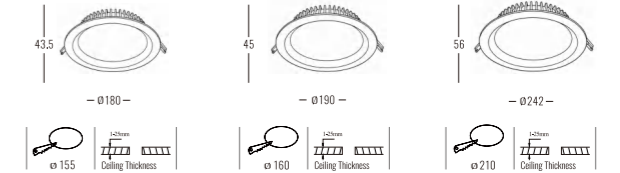

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	12W	Ø180x43.5mm	1518lm	1120lm	● 2700K	484552.B.P.C
SMD LED	12W	Ø180x43.5mm	1620lm	1196lm	● 3000K	484553.B.P.C
SMD LED	12W	Ø180x43.5mm	1722lm	1271lm	○ 4000K	484554.B.P.C
SMD LED	12W	Ø180x43.5mm	1788lm	1320lm	○ 5000K	484555.B.P.C
SMD LED Zigbee Smart	0-12W	Ø180x43.5mm	0-1788lm	0-1320lm	● 2700K - ○ 6500K	484556.B.5.C
<hr/>						
SMD LED	20W	Ø190x45mm	2530lm	1867lm	● 2700K	484562.B.P.C
SMD LED	20W	Ø190x45mm	2700lm	1993lm	● 3000K	484563.B.P.C
SMD LED	20W	Ø190x45mm	2870lm	2118lm	○ 4000K	484564.B.P.C
SMD LED	20W	Ø190x45mm	2981lm	2200lm	○ 5000K	484565.B.P.C
SMD LED Zigbee Smart	0-20W	Ø190x45mm	0-2981lm	0-2200lm	● 2700K - ○ 6500K	484566.B.5.C
<hr/>						
SMD LED	30W	Ø242x56mm	3795lm	2614lm	● 2700K	484572.B.P.C
SMD LED	30W	Ø242x56mm	4050lm	2790lm	● 3000K	484573.B.P.C
SMD LED	30W	Ø242x56mm	4305lm	2965lm	○ 4000K	484574.B.P.C
SMD LED	30W	Ø242x56mm	4471lm	3080lm	○ 5000K	484575.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White)




4846

Downlight Recessed. Ambience/UGR

GLOBUSseries

Architectural INDOOR

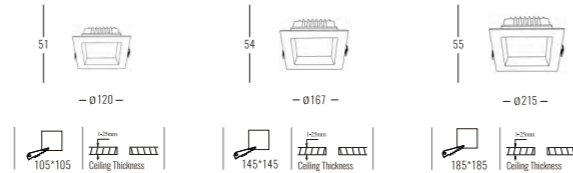

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	12W	120x120x51mm	1518lm	1120lm	● 2700K	484612.B.P.C
SMD LED	12W	120x120x51mm	1620lm	1196lm	● 3000K	484613.B.P.C
SMD LED	12W	120x120x51mm	1722lm	1271lm	○ 4000K	484614.B.P.C
SMD LED	12W	120x120x51mm	1788lm	1320lm	○ 5000K	484615.B.P.C
SMD LED Zigbee Smart	0-12W	120x120x51mm	0-1788lm	0-1320lm	● 2700K - ○ 6500K	484616.B.5.C
SMD LED	18W	167x167x54mm	2277lm	1680lm	● 2700K	484622.B.P.C
SMD LED	18W	167x167x54mm	2430lm	1793lm	● 3000K	484623.B.P.C
SMD LED	18W	167x167x54mm	2583lm	1906lm	○ 4000K	484624.B.P.C
SMD LED	18W	167x167x54mm	2683lm	1980lm	○ 5000K	484625.B.P.C
SMD LED Zigbee Smart	0-18W	167x167x54mm	0-2683lm	0-1980lm	● 2700K - ○ 6500K	484626.B.5.C
SMD LED	25W	215x215x55mm	3162lm	2054lm	● 2700K	484632.B.P.C
SMD LED	25W	215x215x55mm	3375lm	2192lm	● 3000K	484633.B.P.C
SMD LED	25W	215x215x55mm	3588lm	2330lm	○ 4000K	484634.B.P.C
SMD LED	25W	215x215x55mm	3726lm	2420lm	○ 5000K	484635.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White)




White/White

4832

Downlight Recessed. Ambience/UGR

GLANZseries

Architectural INDOOR

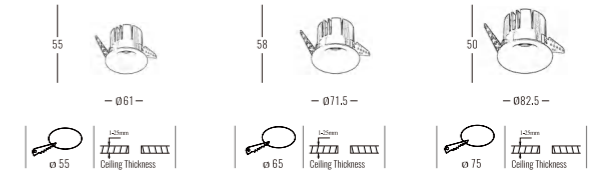

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	7W	ø61x55mm	813lm	546lm	● 2700K	483212.B.P.C
COB LED	7W	ø61x55mm	868lm	583lm	● 3000K	483213.B.P.C
COB LED	7W	ø61x55mm	923lm	619lm	○ 4000K	483214.B.P.C
COB LED	7W	ø61x55mm	958lm	643lm	○ 5000K	483215.B.P.C
COB LED	9W	ø71.5x58mm	1046lm	782lm	● 2700K	483222.B.P.C
COB LED	9W	ø71.5x58mm	1116lm	777lm	● 3000K	483223.B.P.C
COB LED	9W	ø71.5x58mm	1186lm	826lm	○ 4000K	483224.B.P.C
COB LED	9W	ø71.5x58mm	1232lm	828lm	○ 5000K	483225.B.P.C
COB LED	10W	ø82.5x50mm	1162lm	1890lm	● 2700K	483232.B.P.C
COB LED	10W	ø82.5x50mm	1240lm	1748lm	● 3000K	483233.B.P.C
COB LED	10W	ø82.5x50mm	1318lm	1858lm	○ 4000K	483234.B.P.C
COB LED	10W	ø82.5x50mm	1369lm	1929lm	○ 5000K	483235.B.P.C
COB LED Zigbee Smart	0-10W	ø82.5x50mm	0-1369lm	0-1929lm	● 2700K - ○ 6500K	483236.B.5.C

Beam Angle: B(1-24° 2-36° 3-55°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White)




White / White

4832

Downlight Recessed. Ambience/UGR

GLANZseries

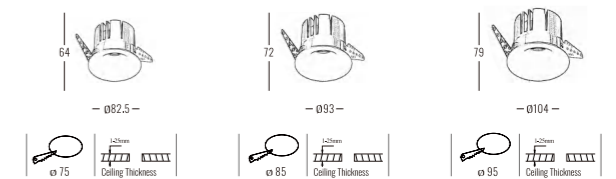

OSRAM 50,000hrs LED LM80 Fixed Ra >90 UGR <19 IP20 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 24° 36° 55°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	Ø82.5x64mm	1394lm	1092lm	● 2700K	483242.B.P.C
COB LED	12W	Ø82.5x64mm	1488lm	1165lm	● 3000K	483243.B.P.C
COB LED	12W	Ø82.5x64mm	1582lm	1239lm	○ 4000K	483244.B.P.C
COB LED	12W	Ø82.5x64mm	1643lm	1286lm	○ 5000K	483245.B.P.C
COB LED Zigbee Smart	0-12W	Ø82.5x64mm	0-1643lm	0-1286lm	● 2700K--○ 6500K	483246.B.5.C
COB LED	18W	Ø93x72mm	2091lm	1638lm	● 2700K	483252.B.P.C
COB LED	18W	Ø93x72mm	2232lm	1748lm	● 3000K	483253.B.P.C
COB LED	18W	Ø93x72mm	2373lm	1858lm	○ 4000K	483254.B.P.C
COB LED	18W	Ø93x72mm	2464lm	1929lm	○ 5000K	483255.B.P.C
COB LED	20W	Ø104x79mm	2324lm	1820lm	● 2700K	483262.B.P.C
COB LED	20W	Ø104x79mm	2480lm	1942lm	● 3000K	483263.B.P.C
COB LED	20W	Ø104x79mm	2636lm	2064lm	○ 4000K	483264.B.P.C
COB LED	20W	Ø104x79mm	2738lm	2144lm	○ 5000K	483265.B.P.C
COB LED Zigbee Smart	0-20W	Ø104x79mm	0-2738lm	0-2144lm	● 2700K--○ 6500K	483266.B.5.C

Beam Angle: B(1-24° 2-36° 3-55°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White)



White / White


5020

Downlight Recessed. Ambience/UGR

INTEGRA series




ADAPTA-LIGHT SERIES: THE 3-STEP INTEGRATED LUMINAIRE

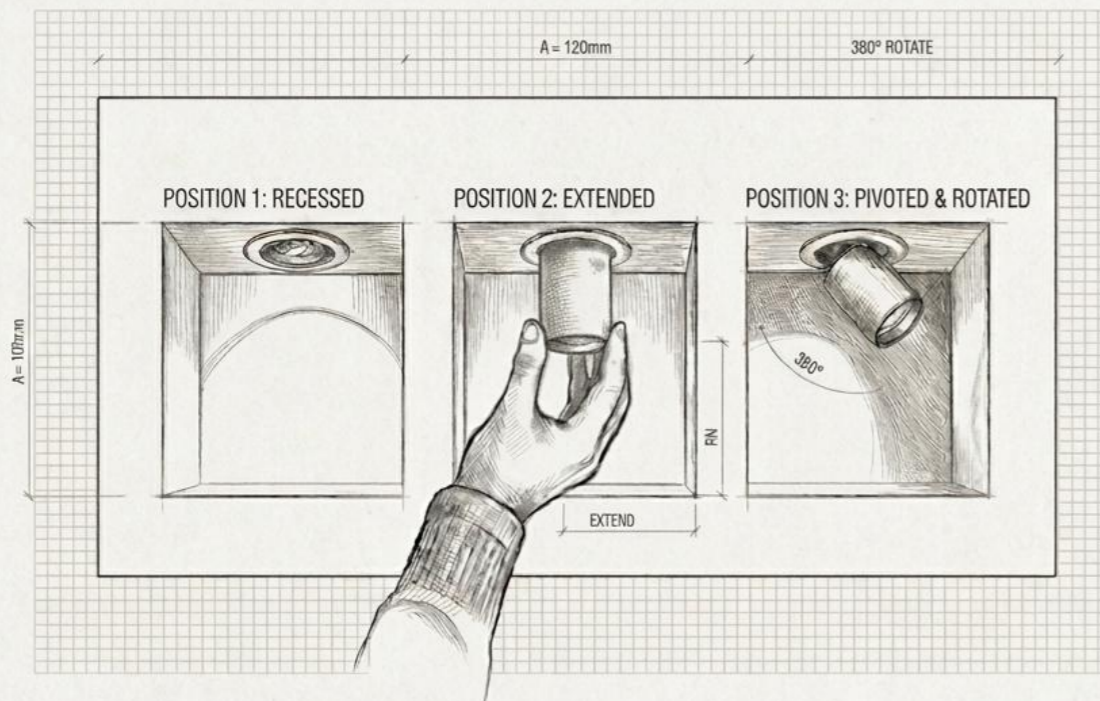

DESIGNED - EST

REF: POCHE DWG

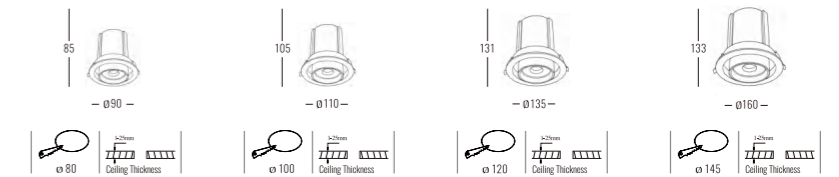

OSRAM 50,000hrs | LED LM80 | Ra >90 | UGR <19 | IP20 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 15° 24° 36° 50°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	ø90x85mm	1394lm	1067lm	● 2700K	502012.B.P.C
COB LED	12W	ø90x85mm	1488lm	1138lm	● 3000K	502013.B.P.C
COB LED	12W	ø90x85mm	1582lm	1210lm	● 4000K	502014.B.P.C
COB LED	12W	ø90x85mm	1643lm	1257lm	● 5000K	502015.B.P.C
COB LED Zigbee Smart	0-12W	ø90x85mm	0-1643lm	0-1257lm	● 2700K - ○ 6500K	502016.B.5.C
COB LED	18W	ø110x105mm	2091lm	1600lm	● 2700K	502022.B.P.C
COB LED	18W	ø110x105mm	2232lm	1707lm	● 3000K	502023.B.P.C
COB LED	18W	ø110x105mm	2373lm	1815lm	● 4000K	502024.B.P.C
COB LED	18W	ø110x105mm	2464lm	1885lm	● 5000K	502025.B.P.C
COB LED Zigbee Smart	0-18W	ø110x105mm	0-2464lm	0-1885lm	● 2700K - ○ 6500K	502026.B.5.C
COB LED	30W	ø135x131mm	3486lm	2489lm	● 2700K	502032.B.P.C
COB LED	30W	ø135x131mm	3720lm	2656lm	● 3000K	502033.B.P.C
COB LED	30W	ø135x131mm	3954lm	2823lm	● 4000K	502034.B.P.C
COB LED	30W	ø135x131mm	4107lm	2932lm	● 5000K	502035.B.P.C
COB LED	35W	ø160x133mm	4067lm	2844lm	● 2700K	502042.B.P.C
COB LED	35W	ø160x133mm	4340lm	3036lm	● 3000K	502043.B.P.C
COB LED	35W	ø160x133mm	4613lm	3227lm	● 4000K	502044.B.P.C
COB LED	35W	ø160x133mm	4791lm	3351lm	● 5000K	502045.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)




Colour Finish: C(WW-White/White WB-White/Black)



5021

Downlight Recessed. Ambience/UGR

INTEGRA series

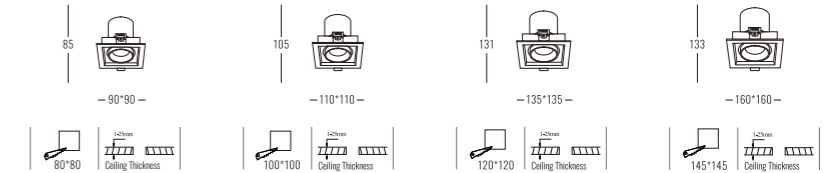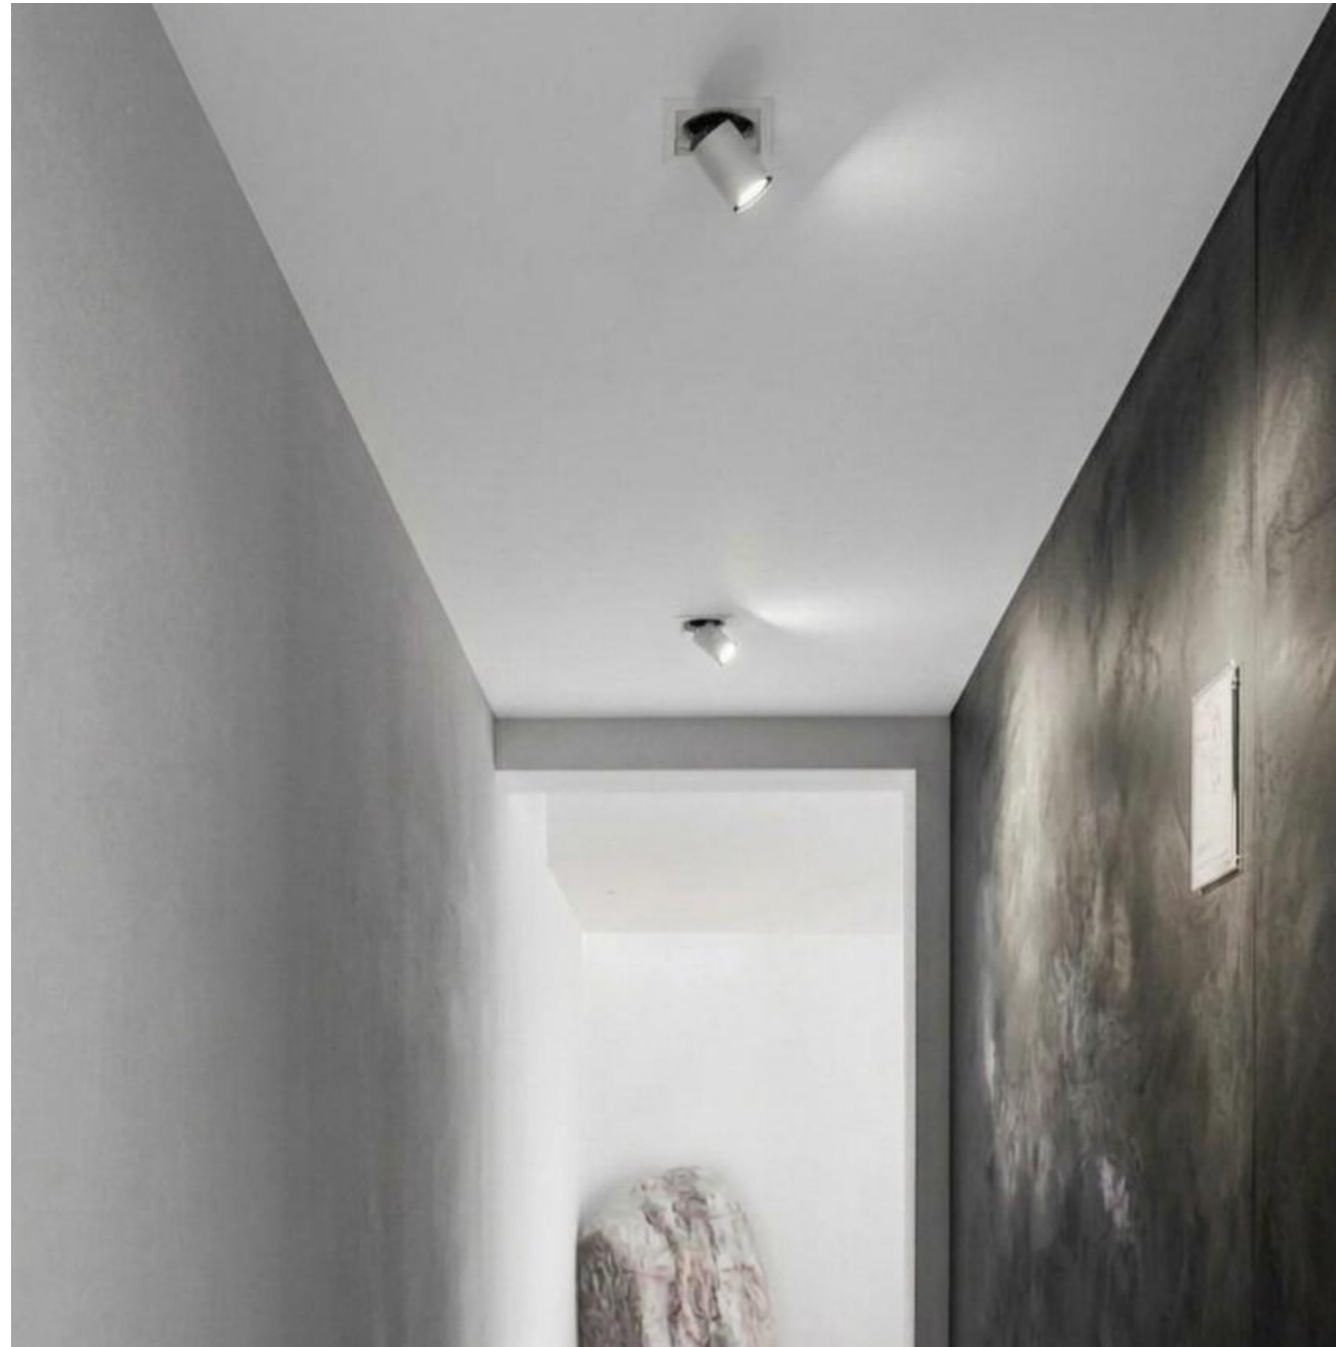

OSRAM 50,000hrs LED LM80 A₀ Ra >90 UGR <19 IP20 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 15° 24° 36° 50°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	90x90x85mm	1394lm	1067lm	● 2700K	502112.B.P.C
COB LED	12W	90x90x85mm	1488lm	1138lm	● 3000K	502113.B.P.C
COB LED	12W	90x90x85mm	1282lm	1210lm	○ 4000K	502114.B.P.C
COB LED	12W	90x90x85mm	1643lm	1257lm	○ 5000K	502115.B.P.C
COB LED Zigbee Smart	0-12W	90x90x85mm	0-1643lm	0-1257lm	● 2700K - ○ 6500K	502116.B.5.C
COB LED	18W	110x110x105mm	2091lm	1600lm	● 2700K	502122.B.P.C
COB LED	18W	110x110x105mm	2232lm	1707lm	● 3000K	502123.B.P.C
COB LED	18W	110x110x105mm	2373lm	1815lm	○ 4000K	502124.B.P.C
COB LED	18W	110x110x105mm	2464lm	1885lm	○ 5000K	502125.B.P.C
COB LED Zigbee Smart	0-18W	110x110x105mm	0-2464lm	0-1885lm	● 2700K - ○ 6500K	502125.B.5.C
COB LED	30W	135x135x131mm	3486lm	2489lm	● 2700K	405132.B.P.C
COB LED	30W	135x135x131mm	3720lm	2656lm	● 3000K	405133.B.P.C
COB LED	30W	135x135x131mm	3954lm	2823lm	○ 4000K	405134.B.P.C
COB LED	30W	135x135x131mm	4107lm	2932lm	○ 5000K	405135.B.P.C
COB LED	35W	160x160x133mm	4067lm	2844lm	● 2700K	405142.B.P.C
COB LED	35W	160x160x133mm	4340lm	3036lm	● 3000K	405143.B.P.C
COB LED	35W	160x160x133mm	4613lm	3227lm	○ 4000K	405144.B.P.C
COB LED	35W	160x160x133mm	4791lm	3351lm	○ 5000K	405145.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black)




5022

Downlight Recessed. Ambience/UGR

INTEGRAseries

Architectural INDOOR

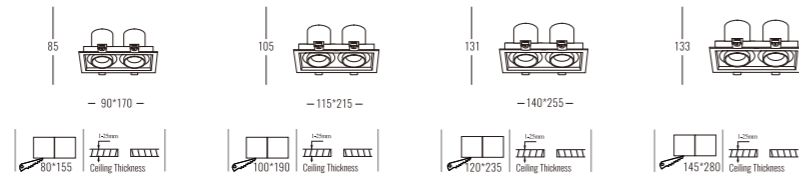

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	24W	90x170x85mm	2789lm	1955lm	● 2700K	502212.B.P.C
COB LED	24W	90x170x85mm	2976lm	2087lm	● 3000K	502213.B.P.C
COB LED	24W	90x170x85mm	3163lm	2218lm	○ 4000K	502214.B.P.C
COB LED	24W	90x170x85mm	3286lm	2304lm	○ 5000K	502215.B.P.C
COB LED Zigbee Smart	0-24W	90x170x85mm	0-3286lm	0-2304lm	● 2700K - ○ 6500K	502216.B.5.C
COB LED	36W	115x215x105mm	4183lm	3022lm	● 2700K	502222.B.P.C
COB LED	36W	115x215x105mm	4464lm	3225lm	● 3000K	502223.B.P.C
COB LED	36W	115x215x105mm	4745lm	3428lm	○ 4000K	502224.B.P.C
COB LED	36W	115x215x105mm	4928lm	3561lm	○ 5000K	502225.B.P.C
COB LED Zigbee Smart	0-36W	115x215x105mm	0-4928lm	0-3561lm	● 2700K - ○ 6500K	502226.B.5.C
COB LED	60W	140x255x131mm	6971lm	5155lm	● 2700K	502232.B.P.C
COB LED	60W	140x255x131mm	7440lm	5502lm	● 3000K	502233.B.P.C
COB LED	60W	140x255x131mm	7909lm	5848lm	○ 4000K	502234.B.P.C
COB LED	60W	140x255x131mm	8214lm	6074lm	○ 5000K	502235.B.P.C
COB LED	70W	60x300x133mm	8133lm	5866lm	● 2700K	502242.B.P.C
COB LED	70W	60x300x133mm	8680lm	6261lm	● 3000K	502243.B.P.C
COB LED	70W	60x300x133mm	9227lm	6655lm	○ 4000K	502244.B.P.C
COB LED	70W	60x300x133mm	9583lm	6912lm	○ 5000K	502245.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black)




5053

Downlight Recessed. Ambience/UGR

INTEGRAseries

Architectural INDOOR

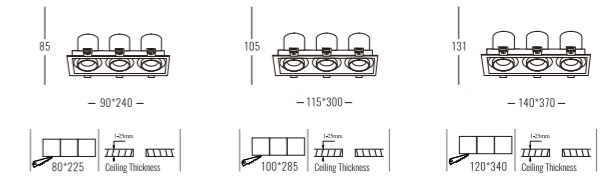

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	36W	90x240x85mm	4183lm	2844lm	● 2700K	505312.B.P.C
COB LED	36W	90x240x85mm	4464lm	3036lm	● 3000K	505313.B.P.C
COB LED	36W	90x240x85mm	4745lm	3227lm	○ 4000K	505314.B.P.C
COB LED	36W	90x240x85mm	4928lm	3351lm	○ 5000K	505315.B.P.C
COB LED Zigbee Smart	0-36W	90x240x85mm	0-4928lm	0-3351lm	● 2700K - ○ 6500K	505316.B.5.C
COB LED	54W	115x300x105mm	6247lm	4266lm	● 2700K	505322.B.P.C
COB LED	54W	115x300x105mm	6696lm	4553lm	● 3000K	505323.B.P.C
COB LED	54W	115x300x105mm	7118lm	4840lm	○ 4000K	505324.B.P.C
COB LED	54W	115x300x105mm	7392lm	5027lm	○ 5000K	505325.B.P.C
COB LED	90W	140x370x131mm	10457lm	7644lm	● 2700K	505332.B.P.C
COB LED	90W	140x370x131mm	11160lm	8158lm	● 3000K	505333.B.P.C
COB LED	90W	140x370x131mm	11863lm	8627lm	○ 4000K	505334.B.P.C
COB LED	90W	140x370x131mm	12321lm	9006lm	○ 5000K	505335.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)



Colour Finish: C(WW-White/White WB-White/Black)



4820

Downlight Recessed. Ambience/UGR

VARIO series

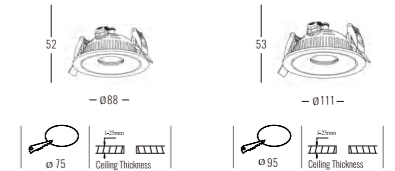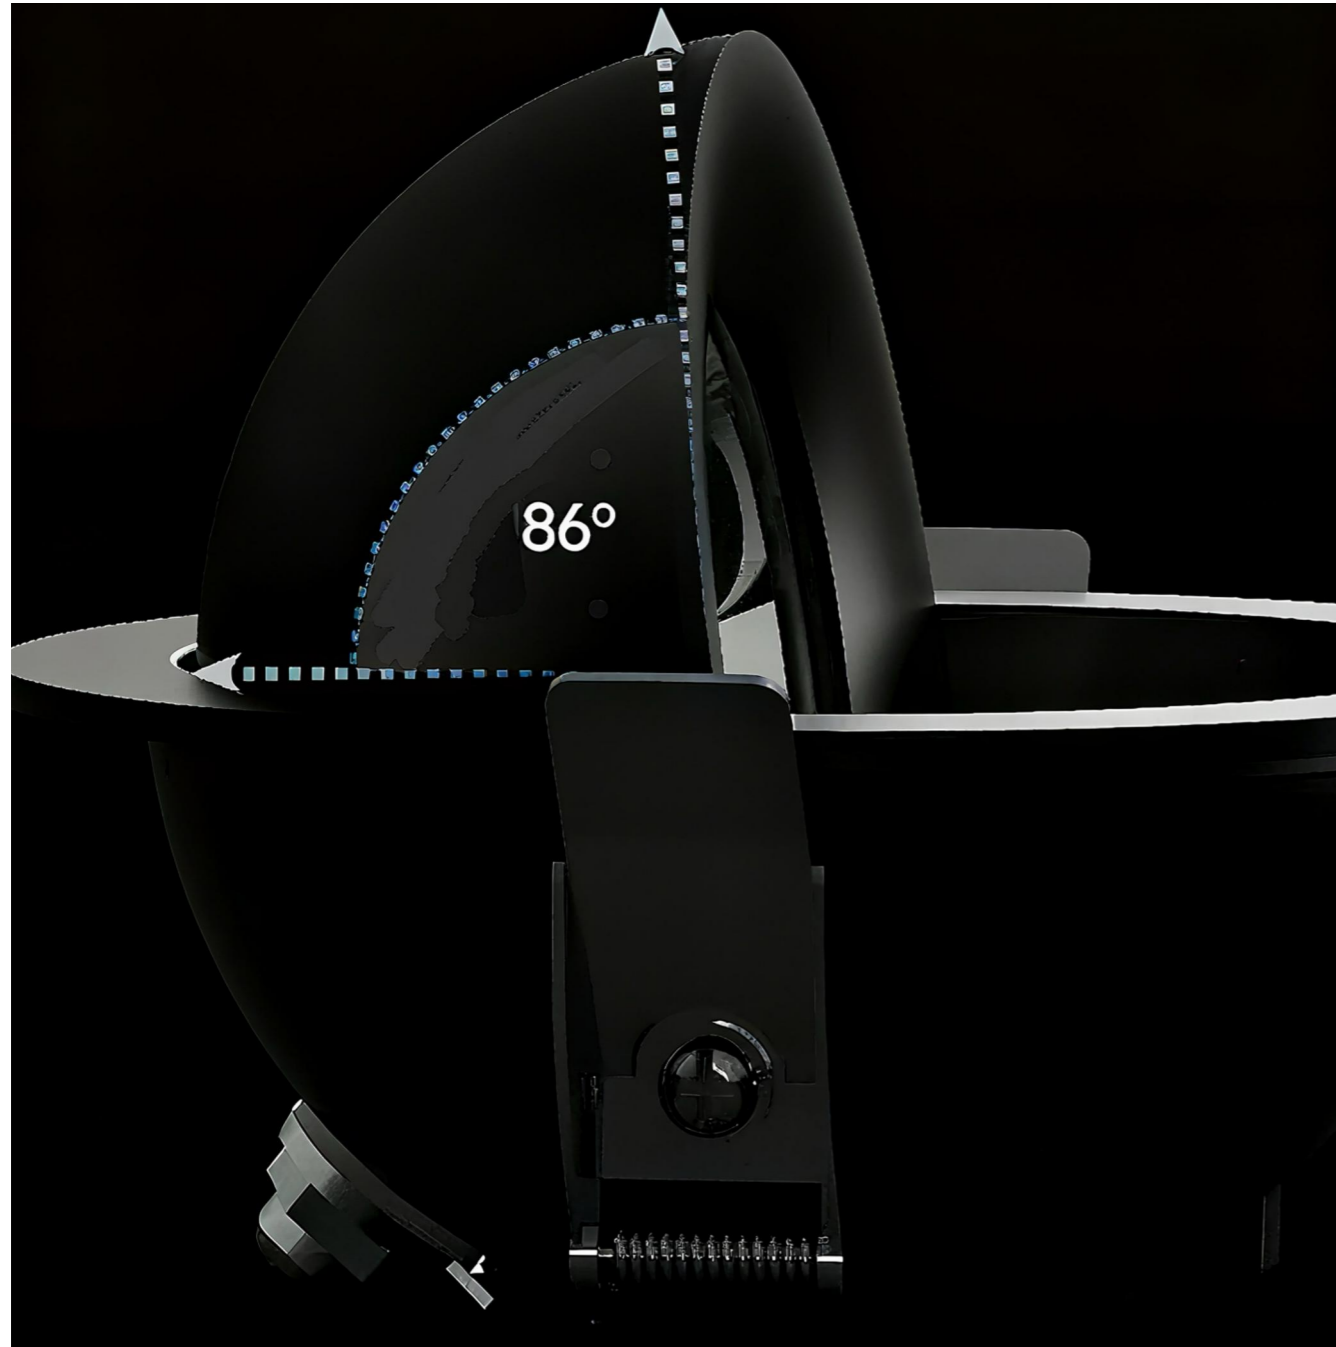

OSRAM 50,000hrs LED LM80 A_{lm} Ra >90 UGR <19 IP20 5 Years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 24° 36° 50°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	8W	Ø88x52mm	930lm	665lm	● 2700K	482012.B.P.C
COB LED	8W	Ø88x52mm	992lm	699lm	● 3000K	482013.B.P.C
COB LED	8W	Ø88x52mm	1054lm	743lm	● 4000K	482014.B.P.C
COB LED	8W	Ø88x52mm	1095lm	772lm	● 5000K	482015.B.P.C
COB LED Zigbee Smart	0-8W	Ø88x52mm	0-1095lm	0-772lm	● 2700K - ○ 6500K	482016.B.5.C
COB LED	12W	Ø111x53mm	1394lm	1092lm	● 2700K	482022.B.P.C
COB LED	12W	Ø111x53mm	1488lm	1165lm	● 3000K	482023.B.P.C
COB LED	12W	Ø111x53mm	1582lm	1239lm	● 4000K	482024.B.P.C
COB LED	12W	Ø111x53mm	1643lm	1286lm	● 5000K	482025.B.P.C
COB LED Zigbee Smart	0-12W	Ø111x53mm	0-1643lm	0-1286lm	● 2700K - ○ 6500K	482026.B.5.C

Beam Angle: B(1-24° 2-36° 3-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)


Colour Finish: C(WW-White/White BB-Black/Black)



4821

Downlight Recessed. Ambience/UGR

VARIO series

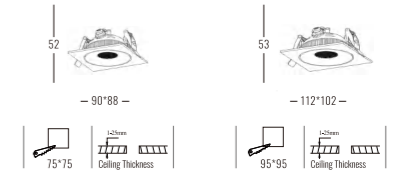

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	8W	90x88x52mm	930lm	655lm	● 2700K	482112.B.P.C
COB LED	8W	90x88x52mm	992lm	699lm	● 3000K	482113.B.P.C
COB LED	8W	90x88x52mm	1054lm	743lm	○ 4000K	482114.B.P.C
COB LED	8W	90x88x52mm	1095lm	772lm	○ 5000K	482115.B.P.C
COB LED Zigbee Smart	0-8W	90x88x52mm	0-1095lm	0-772lm	● 2700K - ○ 6500K	482116.B.5.C
COB LED	12W	112x102x53mm	1394lm	1092lm	● 2700K	482122.B.P.C
COB LED	12W	112x102x53mm	1488lm	1165lm	● 3000K	482123.B.P.C
COB LED	12W	112x102x53mm	1582lm	1239lm	○ 4000K	482124.B.P.C
COB LED	12W	112x102x53mm	1643lm	1286lm	○ 5000K	482125.B.P.C
COB LED Zigbee Smart	0-12W	112x102x53mm	0-1643lm	0-1286lm	● 2700K - ○ 6500K	482126.B.5.C

Beam Angle: B(1-24° 2-36° 3-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4822

Downlight Recessed. Ambience/UGR

VARIOseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	16W	181x90x52mm	1859lm	1310lm	● 2700K	482212.B.P.C
COB LED	16W	181x90x52mm	1984lm	1398lm	● 3000K	482213.B.P.C
COB LED	16W	181x90x52mm	2109lm	1486lm	○ 4000K	482214.B.P.C
COB LED	16W	181x90x52mm	2190lm	1544lm	○ 5000K	482215.B.P.C
COB LED	24W	221x112x53mm	2789lm	2183lm	● 2700K	482222.B.P.C
COB LED	24W	221x112x53mm	2976lm	2330lm	● 3000K	482223.B.P.C
COB LED	24W	221x112x53mm	3163lm	2477lm	○ 4000K	482224.B.P.C
COB LED	24W	221x112x53mm	3286lm	2573lm	○ 5000K	482225.B.P.C
COB LED Zigbee Smart	0-24W	221x112x53mm	0-3286lm	0-2573lm	● 2700K - ○ 6500K	482226.B.5.C

Beam Angle: B(1-24°2-36°3-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4823

Downlight Recessed. Ambience/UGR

VARIOseries

Architectural INDOOR

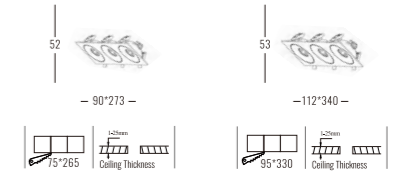


Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	24W	90x273x52mm	2789lm	1965lm	● 2700K	482312.B.P.C
COB LED	24W	90x273x52mm	2976lm	2097lm	● 3000K	482313.B.P.C
COB LED	24W	90x273x52mm	3163lm	2229lm	○ 4000K	482314.B.P.C
COB LED	24W	90x273x52mm	3286lm	2315lm	○ 5000K	482315.B.P.C
COB LED Zigbee Smart	0-24W	90x273x52mm	0-3286lm	0-2315lm	● 2700K - ○ 6500K	482316.B.5.C
COB LED	36W	112x340x53mm	4183lm	3093lm	● 2700K	482322.B.P.C
COB LED	36W	112x340x53mm	4464lm	3301lm	● 3000K	482323.B.P.C
COB LED	36W	112x340x53mm	4745lm	3509lm	○ 4000K	482324.B.P.C
COB LED	36W	112x340x53mm	4928lm	3644lm	○ 5000K	482325.B.P.C
COB LED Zigbee Smart	0-36W	112x340x53mm	0-4928lm	0-3644lm	● 2700K - ○ 6500K	482326.B.5.C

Beam Angle: B(1-24°2-36°3-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4824

Downlight Recessed. Ambience/UGR

VARIOseries

Architectural INDOOR

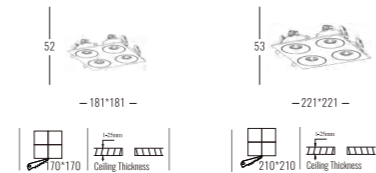

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	32W	181x181x52mm	3718lm	2620lm	● 2700K	482412.B.P.C
COB LED	32W	181x181x52mm	3968lm	2796lm	● 3000K	482413.B.P.C
COB LED	32W	181x181x52mm	4218lm	2972lm	○ 4000K	482414.B.P.C
COB LED	32W	181x181x52mm	4381lm	3087lm	○ 5000K	482415.B.P.C
COB LED	48W	221x221x53mm	5577lm	4003lm	● 2700K	482422.B.P.C
COB LED	48W	221x221x53mm	5952lm	4272lm	● 3000K	482423.B.P.C
COB LED	48W	221x221x53mm	6327lm	4541lm	○ 4000K	482424.B.P.C
COB LED	48W	221x221x53mm	6571lm	4716lm	○ 5000K	482425.B.P.C
COB LED Zigbee Smart	0-48W	221x221x53mm	0-6571lm	0-4716lm	● 2700K - ○ 6500K	482426.B.5.C

Beam Angle: B(1-24°2-36°3-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black)




4825

Downlight Recessed. Ambience/UGR

VARIOseries

Architectural INDOOR

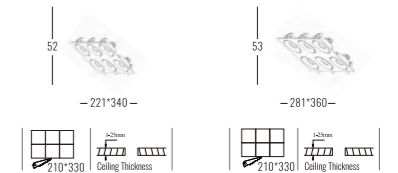

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	48W	221x340x52mm	5577lm	3930lm	● 2700K	482512.B.P.C
COB LED	48W	221x340x52mm	5952lm	4194lm	● 3000K	482513.B.P.C
COB LED	48W	221x340x52mm	6327lm	4459lm	○ 4000K	482514.B.P.C
COB LED	48W	221x340x52mm	6571lm	4631lm	○ 5000K	482515.B.P.C
COB LED Zigbee Smart	0-48W	221x340x52mm	0-6571lm	0-4613lm	● 2700K - ○ 6500K	482516.B.5.C
COB LED	72W	281x360x53mm	8366lm	6186lm	● 2700K	482522.B.P.C
COB LED	72W	281x360x53mm	8928lm	6602lm	● 3000K	482523.B.P.C
COB LED	72W	281x360x53mm	9490lm	7018lm	○ 4000K	482524.B.P.C
COB LED	72W	281x360x53mm	9857lm	7289lm	○ 5000K	482525.B.P.C
COB LED Zigbee Smart	0-72W	281x360x53mm	0-9857lm	0-7289lm	● 2700K - ○ 6500K	482526.B.5.C

Beam Angle: B(1-24°2-36°3-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)


Colour Finish: C(WW-White/White BB-Black/Black)



4013

Downlight Recessed. Ambience/UGR

CIELOseries



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	ø82x97mm	1394lm	1092lm	● 2700K	401312.B.P.C
COB LED	12W	ø82x97mm	1488lm	1165lm	● 3000K	401313.B.P.C
COB LED	12W	ø82x97mm	1582lm	1239lm	● 4000K	401314.B.P.C
COB LED	12W	ø82x97mm	1643lm	1286lm	● 5000K	401315.B.P.C
COB LED Zigbee Smart	0-12W	ø82x97mm	0-1643lm	0-1286lm	● 2700K - ○ 6500K	401316.B.5.C

Beam Angle: B(1- 14-32°BEAM ANGLE ADJUSTABLE)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB--White/Black BB-Black/Black WS-White/Silver WMS-White/Mat Silver)




4015

Downlight Recessed. Ambience/UGR

CIELOseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	∅108x97mm	1394lm	1067lm	● 2700K	401512.B.P.C
COB LED	12W	∅108x97mm	1488lm	1138lm	● 3000K	401513.B.P.C
COB LED	12W	∅108x97mm	1582lm	1210lm	○ 4000K	401514.B.P.C
COB LED	12W	∅108x97mm	1643lm	1257lm	○ 5000K	401515.B.P.C
COB LED Zigbee Smart	0-12W	∅108x97mm	0-1643lm	0-1257lm	● 2700K - ○ 6500K	401516.B.5.C

Beam Angle: B(1- 14-32°BEAM ANGLE ADJUSTABLE)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB--White/White WB-White/Black WS-White/Silver WMS-White/Mat Silver)




4016

Downlight Recessed. Ambience/UGR

CIELOseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	85x85x97mm	1394lm	1092lm	● 2700K	401612.B.P.C
COB LED	12W	85x85x97mm	1488lm	1165lm	● 3000K	401613.B.P.C
COB LED	12W	85x85x97mm	1582lm	1239lm	○ 4000K	401614.B.P.C
COB LED	12W	85x85x97mm	1643lm	1286lm	○ 5000K	401615.B.P.C
COB LED Zigbee Smart	0-12W	85x85x97mm	0-1643lm	0-1286lm	● 2700K - ○ 6500K	401616.B.5.C

Beam Angle: B(1- 14-32°BEAM ANGLE ADJUSTABLE)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB--White/Black BB-Black/Black WS-White/Silver WMS-White/Mat Silver)




4017

Downlight Recessed. Ambience/UGR

CIELOseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	24W	159x85x97mm	2789lm	2001lm	● 2700K	401712.B.P.C
COB LED	24W	159x85x97mm	2976lm	2136lm	● 3000K	401713.B.P.C
COB LED	24W	159x85x97mm	3163lm	2271lm	○ 4000K	401714.B.P.C
COB LED	24W	159x85x97mm	3286lm	2358lm	○ 5000K	401715.B.P.C
COB LED Zigbee Smart	0-24W	159x85x97mm	0-3286lm	0-2358lm	● 2700K - ○ 6500K	401716.B.5.C

Beam Angle: B(1-14°2-32°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB--White/Black BB-Black/Black WS-White/Silver WMS-White/Mat Silver)




4018

Downlight Recessed. Ambience/UGR

CIELOseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	36W	232x85x97mm	4183lm	2878lm	● 2700K	401812.B.P.C
COB LED	36W	232x85x97mm	4464lm	3071lm	● 3000K	401813.B.P.C
COB LED	36W	232x85x97mm	4745lm	3265lm	○ 4000K	401814.B.P.C
COB LED	36W	232x85x97mm	4928lm	3391lm	○ 5000K	401815.B.P.C
COB LED Zigbee Smart	0-36W	232x85x97mm	0-4928lm	0-3391lm	● 2700K - ○ 6500K	401816.B.5.C

Beam Angle: B(1-14°2-32°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black)




4019

Downlight Recessed. Ambience/UGR

CIELOseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	48W	158x158x97mm	2789lm	1955lm	● 2700K	401912.B.P.C
COB LED	48W	158x158x97mm	2976lm	2087lm	● 3000K	401913.B.P.C
COB LED	48W	158x158x97mm	3163lm	2218lm	○ 4000K	401914.B.P.C
COB LED	48W	158x158x97mm	3286lm	2304lm	○ 5000K	401915.B.P.C
COB LED Zigbee Smart	0-48W	158x158x97mm	0-3286lm	0-2304lm	●2700K-○6500K	401916.B.5.C

Beam Angle: B(1-14-32°BEAM ANGLE ADJUSTABLE)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black)




4020

Downlight Recessed. Ambience/UGR

CIELOseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	74x74x97mm	1394lm	1067lm	● 2700K	402012.B.P.C
COB LED	12W	74x74x97mm	1488lm	1138lm	● 3000K	402013.B.P.C
COB LED	12W	74x74x97mm	1582lm	1210lm	○ 4000K	402014.B.P.C
COB LED	12W	74x74x97mm	1643lm	1257lm	○ 5000K	402015.B.P.C
COB LED Zigbee Smart	0-12W	74x74x97mm	0-1643lm	0-1257lm	●2700K-○6500K	402016.B.5.C

Beam Angle: B(1-14-32°BEAM ANGLE ADJUSTABLE)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black)




4021

Downlight Recessed. Ambience/UGR

CIELO series


Architectural INDOOR



4022

Downlight Recessed. Ambience/UGR

CIELO series



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	24W	148x74x97mm	2789lm	1955lm	● 2700K	402112.B.P.C
COB LED	24W	148x74x97mm	2976lm	2087lm	● 3000K	402113.B.P.C
COB LED	24W	148x74x97mm	3163lm	2218lm	○ 4000K	402114.B.P.C
COB LED	24W	148x74x97mm	3286lm	2304lm	○ 5000K	402115.B.P.C
COB LED Zigbee Smart	0-24W	148x74x97mm	0-3286lm	0-2304lm	● 2700K - ○ 6500K	402116.B.5.C

Beam Angle: B(1- 14-32° BEAM ANGLE ADJUSTABLE)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black)



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	36W	220x74x97mm	4183lm	2777lm	● 2700K	402212.B.P.C
COB LED	36W	220x74x97mm	4464lm	2964lm	● 3000K	402213.B.P.C
COB LED	36W	220x74x97mm	4745lm	3151lm	○ 4000K	402214.B.P.C
COB LED	36W	220x74x97mm	4928lm	3272lm	○ 5000K	402215.B.P.C
COB LED Zigbee Smart	0-36W	220x74x97mm	0-4928lm	0-3272lm	● 2700K - ○ 6500K	402216.B.5.C

Beam Angle: B(1- 14-32° BEAM ANGLE ADJUSTABLE)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black)




4023

Downlight Recessed. Ambience/UGR

CIELOseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	48W	148x148x97mm	5577lm	3819lm	● 2700K	402312.B.P.C
COB LED	48W	148x148x97mm	5952lm	4076lm	● 3000K	402313.B.P.C
COB LED	48W	148x148x97mm	6327lm	4332lm	○ 4000K	402314.B.P.C
COB LED	48W	148x148x97mm	6571lm	4499lm	○ 5000K	402315.B.P.C
COB LED Zigbee Smart	0-48W	148x148x97mm	0-6571lm	0-4499lm	● 2700K - ○ 6500K	402316.B.5.C

Beam Angle: B(1- 14-32° BEAM ANGLE ADJUSTABLE)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black)




4060

Downlight Recessed. Ambience/UGR

MIKROseries

Architectural INDOOR

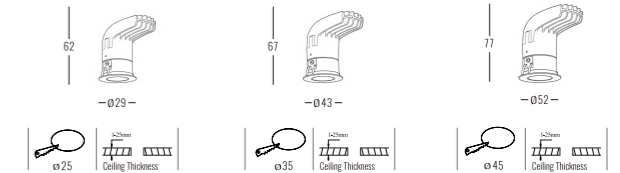

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	∅29x62mm	581lm	421lm	● 2700K	406012.B.P.C
COB LED	5W	∅29x62mm	620lm	449lm	● 3000K	406013.B.P.C
COB LED	5W	∅29x62mm	659lm	477lm	○ 4000K	406014.B.P.C
COB LED	5W	∅29x62mm	684lm	495lm	○ 5000K	406015.B.P.C
COB LED	10W	∅43x67mm	1068lm	836lm	● 2700K	406022.B.P.C
COB LED	10W	∅43x67mm	1140lm	893lm	● 3000K	406023.B.P.C
COB LED	10W	∅43x67mm	1212lm	949lm	○ 4000K	406024.B.P.C
COB LED	10W	∅43x67mm	1259lm	985lm	○ 5000K	406025.B.P.C
COB LED	15W	∅52x77mm	1743lm	1274lm	● 2700K	406032.B.P.C
COB LED	15W	∅52x77mm	1860lm	1359lm	● 3000K	406033.B.P.C
COB LED	15W	∅52x77mm	1977lm	1445lm	○ 4000K	406034.B.P.C
COB LED	15W	∅52x77mm	2053lm	1501lm	○ 5000K	406035.B.P.C

Beam Angle: B(1-15°2-24°3-36°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB--White/Black)




4061

Downlight Recessed. Ambience/UGR

MIKROseries

Adjustable

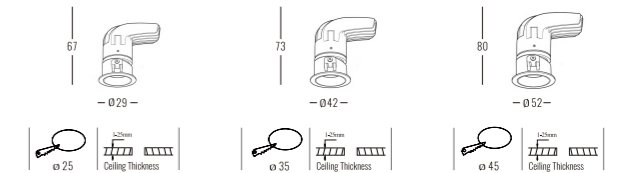

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	∅29x67mm	581lm	421lm	● 2700K	406112.B.P.C
COB LED	5W	∅29x67mm	620lm	449lm	● 3000K	406113.B.P.C
COB LED	5W	∅29x67mm	659lm	477lm	● 4000K	406114.B.P.C
COB LED	5W	∅29x67mm	684lm	495lm	● 5000K	406115.B.P.C
COB LED	10W	∅42x70mm	1068lm	836lm	● 2700K	406122.B.P.C
COB LED	10W	∅42x73mm	1140lm	893lm	● 3000K	406123.B.P.C
COB LED	10W	∅42x70mm	1212lm	949lm	● 4000K	406124.B.P.C
COB LED	10W	∅42x70mm	1259lm	985lm	● 5000K	406125.B.P.C
COB LED	15W	∅52x80mm	1743lm	1274lm	● 2700K	406132.B.P.C
COB LED	15W	∅52x80mm	1860lm	1359lm	● 3000K	406133.B.P.C
COB LED	15W	∅52x80mm	1977lm	1445lm	● 4000K	406134.B.P.C
COB LED	15W	∅52x80mm	2053lm	1501lm	● 5000K	406135.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB--White/Black)




4062

Downlight Recessed. Ambience/UGR

MIKROseries

Adjustable
TRIMLESS

Architectural INDOOR

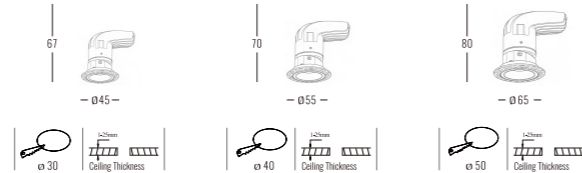

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	ø45x67mm	581lm	421lm	● 2700K	406212.B.P.C
COB LED	5W	ø45x67mm	620lm	449lm	● 3000K	406213.B.P.C
COB LED	5W	ø45x67mm	659lm	477lm	○ 4000K	406214.B.P.C
COB LED	5W	ø45x67mm	684lm	495lm	○ 5000K	406215.B.P.C
COB LED	10W	ø55x70mm	1068lm	836lm	● 2700K	406222.B.P.C
COB LED	10W	ø55x70mm	1140lm	893lm	● 3000K	406223.B.P.C
COB LED	10W	ø55x70mm	1212lm	949lm	○ 4000K	406224.B.P.C
COB LED	10W	ø55x70mm	1259lm	985lm	○ 5000K	406225.B.P.C
COB LED	15W	ø65x80mm	1743lm	1274lm	● 2700K	406232.B.P.C
COB LED	15W	ø65x80mm	1860lm	1359lm	● 3000K	406233.B.P.C
COB LED	15W	ø65x80mm	1977lm	1445lm	○ 4000K	406234.B.P.C
COB LED	15W	ø65x80mm	2053lm	1501lm	○ 5000K	406235.B.P.C

Beam Angle: B(1-15°2-24°3-36°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB--White/Black)




4740

Downlight Recessed. Ambience/UGR

AHLEMseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	ø89x88mm	581lm	437lm	● 2700K	474012.B.P.C
COB LED	5W	ø89x88mm	620lm	466lm	● 3000K	474013.B.P.C
COB LED	5W	ø89x88mm	659lm	495lm	○ 4000K	474014.B.P.C
COB LED	5W	ø89x88mm	684lm	515lm	○ 5000K	474015.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-50°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW-White/White)




5030

Downlight Recessed. Ambience/UGR

KOMPAKT series

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2W	43x40x43mm	201lm	125lm	● 2700K	503012.B.P.C
COB LED	2W	43x40x43mm	214lm	134lm	● 3000K	503013.B.P.C
COB LED	2W	43x40x43mm	227lm	143lm	○ 4000K	503014.B.P.C
COB LED	2W	43x40x43mm	236lm	147lm	○ 5000K	503015.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)




5031

Downlight Recessed. Ambience/UGR

KOMPAKT series

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	4W	72x40x43mm	401lm	250lm	● 2700K	503112.B.P.C
COB LED	4W	72x40x43mm	428lm	269lm	● 3000K	503113.B.P.C
COB LED	4W	72x40x43mm	455lm	286lm	○ 4000K	503114.B.P.C
COB LED	4W	72x40x43mm	473lm	294lm	○ 5000K	503115.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)




5032

Downlight Recessed. Ambience/UGR

KOMPAKT series

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	6W	100x40x43mm	602lm	374lm	● 2700K	503212.B.P.C
COB LED	6W	100x40x43mm	642lm	403lm	● 3000K	503213.B.P.C
COB LED	6W	100x40x43mm	682lm	428lm	● 4000K	503214.B.P.C
COB LED	6W	100x40x43mm	709lm	441lm	● 5000K	503215.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)




5033

Downlight Recessed. Ambience/UGR

KOMPAKT series

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	162x40x43mm	1003lm	749lm	● 2700K	503312.B.P.C
COB LED	10W	162x40x43mm	1070lm	806lm	● 3000K	503313.B.P.C
COB LED	10W	162x40x43mm	1137lm	857lm	● 4000K	503314.B.P.C
COB LED	10W	162x40x43mm	1181lm	882lm	● 5000K	503315.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)




5034

Downlight Recessed. Ambience/UGR

KOMPAKT series

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	20W	312x40x43mm	2000lm	1494lm	● 2700K	503412.B.P.C
COB LED	20W	312x40x43mm	2140lm	1612lm	● 3000K	503413.B.P.C
COB LED	20W	312x40x43mm	2275lm	1714lm	○ 4000K	503414.B.P.C
COB LED	20W	312x40x43mm	2363lm	1765lm	○ 5000K	503415.B.P.C
COB LED Zigbee Smart	0-20W	312x40x43mm	0-2363lm	0-1765lm	● 2700K - ○ 6500K	503416.B.5.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)




White/Black

5035

Downlight Recessed. Ambience/UGR

KOMPAKT series

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2W	45x76x43mm	201lm	125lm	● 2700K	503512.B.P.C
COB LED	2W	45x76x43mm	214lm	134lm	● 3000K	503513.B.P.C
COB LED	2W	45x76x43mm	227lm	143lm	○ 4000K	503514.B.P.C
COB LED	2W	45x76x43mm	236lm	147lm	○ 5000K	503515.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)



White/Black


5036

Downlight Recessed. Ambience/UGR

KOMPAKT series



Architectural INDOOR



OSRAM | 50,000hrs | LED LM80 | Fixed | Ra >90 | UGR <19 | IP20 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 30°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	4W	76x76x43mm	401lm	250lm	● 2700K	503612.B.P.C
COB LED	4W	76x76x43mm	428lm	269lm	● 3000K	503613.B.P.C
COB LED	4W	76x76x43mm	455lm	286lm	○ 4000K	503614.B.P.C
COB LED	4W	76x76x43mm	473lm	294lm	○ 5000K	503615.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)



White/Black


5037

Downlight Recessed. Ambience/UGR

KOMPAKT series



Architectural INDOOR



OSRAM | 50,000hrs | LED LM80 | Fixed | Ra >90 | UGR <19 | IP20 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 30°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	6W	105x76x42mm	602lm	374lm	● 2700K	503712.B.P.C
COB LED	6W	105x76x42mm	642lm	403lm	● 3000K	503713.B.P.C
COB LED	6W	105x76x42mm	682lm	428lm	○ 4000K	503714.B.P.C
COB LED	6W	105x76x42mm	709lm	441lm	○ 5000K	503715.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)



White/Black


5038

Downlight Recessed. Ambience/UGR

KOMPAKT series



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	165x76x42mm	1003lm	749lm	● 2700K	503812.B.P.C
COB LED	10W	165x76x42mm	1070lm	806lm	● 3000K	503813.B.P.C
COB LED	10W	165x76x42mm	1137lm	857lm	○ 4000K	503814.B.P.C
COB LED	10W	165x76x42mm	1181lm	882lm	○ 5000K	503815.B.P.C
COB LED Zigbee Smart	0-10W	165x76x42mm	0-1181lm	0-882lm	● 2700K - ○ 6500K	503816.B.5.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)



White/Black


5039

Downlight Recessed. Ambience/UGR

KOMPAKT series



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	20W	315x76x42mm	2005lm	1498lm	● 2700K	503912.B.P.C
COB LED	20W	315x76x42mm	2140lm	1612lm	● 3000K	503913.B.P.C
COB LED	20W	315x76x42mm	2275lm	1714lm	○ 4000K	503914.B.P.C
COB LED	20W	315x76x42mm	2363lm	1765lm	○ 5000K	503915.B.P.C
COB LED Zigbee Smart	0-20W	315x76x42mm	0-2363lm	0-1765lm	● 2700K - ○ 6500K	503916.B.5.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)




White/Black

5085

Downlight Recessed. Ambience/UGR

LINIEseries

ArchitecturalINDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	73x32x50mm	501lm	314lm	● 2700K	508512.B.P.C
COB LED	5W	73x32x50mm	535lm	335lm	● 3000K	508513.B.P.C
COB LED	5W	73x32x50mm	569lm	356lm	○ 4000K	508514.B.P.C
COB LED	5W	73x32x50mm	591lm	370lm	○ 5000K	508515.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)




White/Black

5086

Downlight Recessed. Ambience/UGR

LINIEseries

ArchitecturalINDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	133x32x50mm	1003lm	785lm	● 2700K	508612.B.P.C
COB LED	10W	133x32x50mm	1070lm	838lm	● 3000K	508613.B.P.C
COB LED	10W	133x32x50mm	1137lm	891lm	○ 4000K	508614.B.P.C
COB LED	10W	133x32x50mm	1181lm	925lm	○ 5000K	508615.B.P.C
COB LED Zigbee Smart	0-10W	133x32x50mm	0-1181lm	0-925lm	●2700K-○6500K	508616.B.5.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)




White/Black

5087

Downlight Recessed. Ambience/UGR

LINIEseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	18W	253x32x50mm	1413lm	1805lm	● 2700K	508712.B.P.C
COB LED	18W	253x32x50mm	1508lm	1926lm	● 3000K	508713.B.P.C
COB LED	18W	253x32x50mm	1603lm	2047lm	○ 4000K	508714.B.P.C
COB LED	18W	253x32x50mm	1665lm	2126lm	○ 5000K	508715.B.P.C
COB LED Zigbee Smart	0-18W	253x32x50mm	0-1665lm	0-2126lm	● 2700K - ○ 6500K	508716.B.5.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)



White/Black


5088

Downlight Recessed. Ambience/UGR

LINIEseries

Adjustable

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	133x32x50mm	501lm	314lm	● 2700K	508812.B.P.C
COB LED	5W	133x32x50mm	535lm	335lm	● 3000K	508813.B.P.C
COB LED	5W	133x32x50mm	569lm	356lm	○ 4000K	508814.B.P.C
COB LED	5W	133x32x50mm	591lm	370lm	○ 5000K	508815.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)



White/Black


5089

Downlight Recessed. Ambience/UGR

LINIEseries

Adjustable

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	145x43x48mm	1003lm	785lm	● 2700K	508912.B.P.C
COB LED	10W	145x43x48mm	1070lm	838lm	● 3000K	508913.B.P.C
COB LED	10W	145x43x48mm	1137lm	891lm	○ 4000K	508914.B.P.C
COB LED	10W	145x43x48mm	1181lm	925lm	○ 5000K	508915.B.P.C
COB LED Zigbee Smart	0-10W	145x43x48mm	0-1181lm	0-925lm	● 2700K - ○ 6500K	508916.B.5.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)




5090

Downlight Recessed. Ambience/UGR

LINIEseries

Adjustable

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	18W	265x43x48mm	1805lm	1413lm	● 2700K	509012.B.P.C
COB LED	18W	265x43x48mm	1926lm	1508lm	● 3000K	509013.B.P.C
COB LED	18W	265x43x48mm	2047lm	1603lm	○ 4000K	509014.B.P.C
COB LED	18W	265x43x48mm	2126lm	1665lm	○ 5000K	509015.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)




5091

Downlight Recessed. Ambience/UGR

LINIEseries



ArchitecturalINDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	70x67x55mm	501lm	314lm	● 2700K	509112.B.P.C
COB LED	5W	70x67x55mm	535lm	335lm	● 3000K	509113.B.P.C
COB LED	5W	70x67x55mm	569lm	356lm	○ 4000K	509114.B.P.C
COB LED	5W	70x67x55mm	591lm	370lm	○ 5000K	509115.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)



White/Black


5092

Downlight Recessed. Ambience/UGR

LINIEseries



ArchitecturalINDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	130x67x55mm	1003lm	785lm	● 2700K	509212.B.P.C
COB LED	10W	130x67x55mm	1070lm	838lm	● 3000K	509213.B.P.C
COB LED	10W	130x67x55mm	1137lm	891lm	○ 4000K	509214.B.P.C
COB LED	10W	130x67x55mm	1181lm	925lm	○ 5000K	509215.B.P.C
COB LED Zigbee Smart	0-10W	130x67x55mm	0-1181lm	0-925lm	● 2700K - ○ 6500K	509216.B.5.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)



White/Black


5093

Downlight Recessed. Ambience/UGR

LINIEseries



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	18W	250x67x55mm	1805lm	1413lm	● 2700K	509312.B.P.C
COB LED	18W	250x67x55mm	1926lm	1508lm	● 3000K	509313.B.P.C
COB LED	18W	250x67x55mm	2047lm	1603lm	● 4000K	509314.B.P.C
COB LED	18W	250x67x55mm	2126lm	1665lm	● 5000K	509315.B.P.C
COB LED Zigbee Smart	0-18W	250x67x55mm	0-2126lm	0-1665lm	● 2700K - ○ 6500K	509316.B.5.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)




White/Black

5076

Downlight Recessed. Ambience/UGR

KLEINseries



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2W	ø40x40mm	201lm	131lm	● 2700K	507612.B.P.C
COB LED	2W	ø40x40mm	214lm	140lm	● 3000K	507613.B.P.C
COB LED	2W	ø40x40mm	227lm	148lm	● 4000K	507614.B.P.C
COB LED	2W	ø40x40mm	236lm	154lm	● 5000K	507615.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)




White/Black

5077

Downlight Recessed. Ambience/UGR

KLEINseries



OSRAM 50,000hrs	LED LM80	Alu.	Ra >90	UGR <19	IP20	5 Years Warranty	AC220-240V 50/60Hz	CE	Die-cast Aluminum Heatsink	30°
--------------------	-------------	------	-----------	------------	------	------------------------	-----------------------	----	-------------------------------	-----

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2W	43x40x52mm	201lm	131lm	● 2700K	507712.B.P.C
COB LED	2W	43x40x52mm	214lm	140lm	● 3000K	507713.B.P.C
COB LED	2W	43x40x52mm	227lm	148lm	● 4000K	507714.B.P.C
COB LED	2W	43x40x52mm	236lm	154lm	● 5000K	507715.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)




5078

Downlight Recessed. Ambience/UGR

KLEINseries

Architectural INDOOR



OSRAM 50,000hrs		LED LM80		Ra >90	UGR <19	IP20		AC220-240V 50/60Hz		Die-cast Aluminum Heatsink	
---------------------------	--	-------------	--	-----------	------------	------	--	-----------------------	--	-------------------------------	--

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	4W	72x40x52mm	● 401lm	● 262lm	2700K	507812.B.P.C
COB LED	4W	72x40x52mm	● 428lm	● 279lm	3000K	507813.B.P.C
COB LED	4W	72x40x52mm	○ 455lm	○ 297lm	4000K	507814.B.P.C
COB LED	4W	72x40x52mm	○ 473lm	○ 308lm	5000K	507815.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)




White/Black

5079

Downlight Recessed. Ambience/UGR

KLEINseries

Architectural INDOOR



OSRAM 50,000hrs		LED LM80		Ra >90	UGR <19	IP20		AC220-240V 50/60Hz		Die-cast Aluminum Heatsink	
---------------------------	--	-------------	--	-----------	------------	------	--	-----------------------	--	-------------------------------	--

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	6W	100x40x52mm	● 602lm	● 393lm	2700K	507912.B.P.C
COB LED	6W	100x40x52mm	● 642lm	● 419lm	3000K	507913.B.P.C
COB LED	6W	100x40x52mm	○ 682lm	○ 445lm	4000K	507914.B.P.C
COB LED	6W	100x40x52mm	○ 709lm	○ 462lm	5000K	507915.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)



White/Black


5080

Downlight Recessed. Ambience/UGR

KLEINseries

Trimless

ArchitecturalINDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	162x40x52mm	1003lm	785lm	● 2700K	508012.B.P.C
COB LED	10W	162x40x52mm	1070lm	838lm	● 3000K	508013.B.P.C
COB LED	10W	162x40x52mm	1137lm	891lm	○ 4000K	508014.B.P.C
COB LED	10W	162x40x52mm	1481lm	925lm	○ 5000K	508015.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)



White/Black

5081

Downlight Recessed. Ambience/UGR

KLEINseries

Trimless

ArchitecturalINDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2W	75x47x52mm	201lm	131lm	● 2700K	508112.B.P.C
COB LED	2W	75x47x52mm	214lm	140lm	● 3000K	508113.B.P.C
COB LED	2W	75x47x52mm	227lm	148lm	○ 4000K	508114.B.P.C
COB LED	2W	75x47x52mm	236lm	154lm	○ 5000K	508115.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)



White/Black


5082

Downlight Recessed. Ambience/UGR

KLEINseries

Trimless

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	4W	76x76x52mm	401lm	262lm	● 2700K	508212.B.P.C
COB LED	4W	76x76x52mm	428lm	279lm	● 3000K	508213.B.P.C
COB LED	4W	76x76x52mm	455lm	297lm	○ 4000K	508214.B.P.C
COB LED	4W	76x76x52mm	473lm	308lm	○ 5000K	508215.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)



White/Black


5083

Downlight Recessed. Ambience/UGR

KLEINseries

Trimless

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	6W	105x76x53mm	602lm	393lm	● 2700K	508312.B.P.C
COB LED	6W	105x76x53mm	642lm	419lm	● 3000K	508313.B.P.C
COB LED	6W	105x76x53mm	682lm	445lm	○ 4000K	508314.B.P.C
COB LED	6W	105x76x53mm	709lm	462lm	○ 5000K	508315.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)



White/Black


5084

Downlight Recessed. Ambience/UGR

KLEINseries

Trimless

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	165x77x52mm	1003lm	785lm	● 2700K	508412.B.P.C
COB LED	10W	165x77x52mm	1070lm	838lm	● 3000K	508413.B.P.C
COB LED	10W	165x77x52mm	1137lm	891lm	○ 4000K	508414.B.P.C
COB LED	10W	165x77x52mm	1181lm	925lm	○ 5000K	508415.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)




White/Black

4730

Downlight Recessed. Ambience/UGR

PLATINseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	128x37x55mm	1312lm	1027m	● 2700K	473012.B.P.C
COB LED	10W	128x37x55mm	1400lm	1096lm	● 3000K	473013.B.P.C
COB LED	10W	128x37x55mm	1488lm	1165lm	○ 4000K	473014.B.P.C
COB LED	10W	128x37x55mm	1546lm	1210lm	○ 5000K	473015.B.P.C

Beam Angle: B(1-15°2-24°3-38°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim 4-Zigbee Smart)

Colour Finish: C(WW-White/WhiteWB-White/Black)




White/White White/Black

4731

Downlight Recessed. Ambience/UGR

PLATINseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	20W	237x37x55mm	2624lm	1849lm	● 2700K	473112.B.P.C
COB LED	20W	237x37x55mm	2800lm	1973lm	● 3000K	473113.B.P.C
COB LED	20W	237x37x55mm	2976lm	2097lm	○ 4000K	473114.B.P.C
COB LED	20W	237x37x55mm	3091lm	2178lm	○ 5000K	473115.B.P.C

Beam Angle: B(1-15° 2-24° 3-38°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim 5-Zigbee Smart)

Colour Finish: C(WW-White/WhiteWB-White/Black)




4732

Downlight Recessed. Ambience/UGR

PLATINseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	345x37x55mm	1499lm	1174lm	● 2700K	473212.B.P.C
COB LED	10W	345x37x55mm	1600lm	1253lm	● 3000K	473213.B.P.C
COB LED	10W	345x37x55mm	1701lm	1332lm	○ 4000K	473214.B.P.C
COB LED	10W	345x37x55mm	1766lm	1383lm	○ 5000K	473215.B.P.C

Beam Angle: B(1-15° 2-24° 3-38°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim 5-Zigbee Smart)

Colour Finish: C(WW-White/WhiteWB-White/Black)




4733

Downlight Recessed. Ambience/UGR

PLATINseries

Trimless

ArchitecturalINDOOR



OSRAM 50,000hrs LED LM80 Ra >90 UGR <19 IP20 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 15° 24° 38°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	237x37x55mm	1499lm	1174lm	● 2700K	473312.B.P.C
COB LED	10W	237x37x55mm	1600lm	1253lm	● 3000K	473313.B.P.C
COB LED	10W	237x37x55mm	1701lm	1332lm	○ 4000K	473314.B.P.C
COB LED	10W	237x37x55mm	1766lm	1383lm	○ 5000K	473315.B.P.C

Beam Angle: B(1-15°2-24°3-38°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim 5-Zigbee Smart)

Colour Finish: C(WW-White/WhiteWB-White/Black)




4734

Downlight Recessed. Ambience/UGR

PLATINseries

Trimless

ArchitecturalINDOOR



OSRAM 50,000hrs LED LM80 Ra >90 UGR <19 IP20 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 15° 24° 38°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	20W	237x37x55mm	2998lm	2113lm	● 2700K	473412.B.P.C
COB LED	20W	237x37x55mm	3200lm	2255lm	● 3000K	473413.B.P.C
COB LED	20W	237x37x55mm	3402lm	2397lm	○ 4000K	473414.B.P.C
COB LED	20W	237x37x55mm	3533lm	2490lm	○ 5000K	473415.B.P.C

Beam Angle: B(1-15°2-24°3-38°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim 5-Zigbee Smart)


Colour Finish: C(WW-White/WhiteWB-White/Black)



4440

Downlight Recessed. Ambience/UGR

SENSIO series

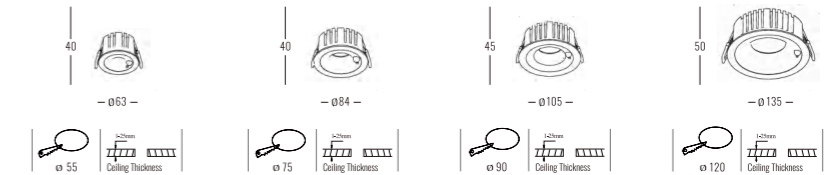

OSRAM 50,000hrs LED LM80 Fixed Ra >90 UGR <19 IP20 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 15° 24° 36° 50°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	7W	ø62x40mm	813lm	582lm	● 2700K	444012.B.P.C
COB LED	7W	ø62x40mm	868lm	621lm	● 3000K	444013.B.P.C
COB LED	7W	ø62x40mm	923lm	661lm	○ 4000K	444014.B.P.C
COB LED	7W	ø62x40mm	958lm	686lm	○ 5000K	444015.B.P.C
COB LED	10W	ø84x40mm	1162lm	910lm	● 2700K	444022.B.P.C
COB LED	10W	ø84x40mm	1240lm	971lm	● 3000K	444023.B.P.C
COB LED	10W	ø84x40mm	1318lm	1032lm	○ 4000K	444024.B.P.C
COB LED	10W	ø84x40mm	1369lm	1072lm	○ 5000K	444025.B.P.C
COB LED	15W	ø105x45mm	1743lm	1274lm	● 2700K	444032.B.P.C
COB LED	15W	ø105x45mm	1860lm	1359lm	● 3000K	444033.B.P.C
COB LED	15W	ø105x45mm	1977lm	1445lm	○ 4000K	444034.B.P.C
COB LED	15W	ø105x45mm	2053lm	1501lm	○ 5000K	444035.B.P.C
COB LED	20W	ø135x50mm	2174lm	1702lm	● 2700K	444042.B.P.C
COB LED	20W	ø135x50mm	2320lm	1817lm	● 3000K	444043.B.P.C
COB LED	20W	ø135x50mm	2466lm	1931lm	○ 4000K	444044.B.P.C
COB LED	20W	ø135x50mm	2561lm	2005lm	○ 5000K	444045.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW-White / White WB - White / Black BB - Black / Black BW - Black / White BS - Black / Silver WS - White / Silver BG - Black / Gold WG - White / Gold)

