































DOWNLIGHT SURFACE IP20


			
PLANUM 4829 8W/12W P.1	OPTIX 5061 5W P.2	OPTIX 5062 15W P.4	OPTIX 5063 20W P.6
			
OPTIX 5064 30W P.7	KORPER 5052 20W P.8	KORPER 5053 40W P.9	KORPER 5054 60W P.10
			
KORPER 5055 12W P.12	KORPER 5056 20W P.13	FOCUS 5051 7W/10W P.14	FLACHE 5050 10W/18W/25W/42W/50W/70W/85W P.15-16
			
ORBIS 4840 12W/18W P.18	GELENK 5057 12W P.19	GELENK 5058 12W P.20	PLATTE 5065 7W P.21
			
PLATTE 5066 7*2W P.22	PLATTE 5067 7*3W P.23	PLATTE 5068 7*4W P.24	PLATTE 5069 7*6W P.25
			
PLATTE 5070 7*2W P.26	PLATTE 5071 7*3W P.27	PLATTE 5072 7*5W P.28	PLATTE 5073 7W P.30
			
PLATTE 5074 7*2W P.31	PLATTE 5075 7*3W P.32	SENSIO 4441 12W P.34	SENSIO 4442 12W P.36

4829

Downlight Recessed. Ambience/UGR

PLANUMseries

ArchitecturalINDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	8W	∅78x62mm	930lm	640lm	● 2700K	482912.B.P.C
COB LED	8W	∅78x62mm	992lm	683lm	● 3000K	482913.B.P.C
COB LED	8W	∅78x62mm	1054lm	726lm	○ 4000K	482914.B.P.C
COB LED	8W	∅78x62mm	1095lm	754lm	○ 5000K	482915.B.P.C
COB LED	12W	∅96x69mm	930lm	640lm	● 2700K	482912.B.P.C
COB LED	12W	∅96x69mm	992lm	683lm	● 3000K	482913.B.P.C
COB LED	12W	∅96x69mm	1054lm	726lm	○ 4000K	482914.B.P.C
COB LED	12W	∅96x69mm	1095lm	754lm	○ 5000K	482915.B.P.C

Beam Angle: B(1-24° 2-36° 3-50°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW-White/White BB - Black/Black)




White / White Black / Black

5061

Downlight Recessed. Ambience/UGR

OPTIXseries

ArchitecturalINDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	50x50x83mm	656lm	482lm	● 2700K	506112.B.P.C
COB LED	5W	50x50x83mm	700lm	514lm	● 3000K	506113.B.P.C
COB LED	5W	50x50x83mm	744lm	546lm	○ 4000K	506114.B.P.C
COB LED	5W	50x50x83mm	773lm	568lm	○ 5000K	506115.B.P.C

Beam Angle: B(1-50° 2-80°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW-White/White BB-Black/Black)




White / White Black / Black

5062

Downlight Recessed. Ambience/UGR

OPTIX series



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	15W	86x86x88mm	1968lm	1405lm	● 2700K	506212.B.P.C
COB LED	15W	86x86x88mm	2100lm	1499lm	● 3000K	506213.B.P.C
COB LED	15W	86x86x88mm	2232lm	1594lm	● 4000K	506214.B.P.C
COB LED	15W	86x86x88mm	2318lm	1655lm	● 5000K	506215.B.P.C

Beam Angle: B(1-50° 2-80°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW-White/White BB - Black/Black)



White/White Black/Black

5063

Downlight Recessed. Ambience/UGR

OPTIXseries



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	20W	203x51x88mm	2624lm	1806lm	● 2700K	506312.B.P.C
COB LED	20W	203x51x88mm	2800lm	1928lm	● 3000K	506313.B.P.C
COB LED	20W	203x51x88mm	2976lm	2049lm	○ 4000K	506314.B.P.C
COB LED	20W	203x51x88mm	3091lm	2128lm	○ 5000K	506315.B.P.C

Beam Angle: B(1-50° 2-80°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW-White/White BB-Black/Black)




5064

Downlight Recessed. Ambience/UGR

OPTIXseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	30W	125x125x88mm	3935lm	3011lm	● 2700K	506412.B.P.C
COB LED	30W	125x125x88mm	4200lm	3213lm	● 3000K	506413.B.P.C
COB LED	30W	125x125x88mm	4465lm	3415lm	○ 4000K	506414.B.P.C
COB LED	30W	125x125x88mm	4637lm	3547lm	○ 5000K	506415.B.P.C

Beam Angle: B(1-50° 2-80°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW-White/White BB-Black/Black)



5052

Downlight Recessed. Ambience/UGR

KORPERseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	20W	200x200x39mm	2436lm	1579lm	● 2700K	505212.B.P.C
SMD LED	20W	200x200x39mm	2600lm	1685lm	● 3000K	505213.B.P.C
SMD LED	20W	200x200x39mm	2764lm	1791lm	○ 4000K	505214.B.P.C
SMD LED	20W	200x200x39mm	2870lm	1860lm	○ 5000K	505215.B.P.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW - White / White WB - White / Black WMS - White / Matt Silver BB - Black / Black BW - Black / White BMS - Black / Matt Silver)




5053

Downlight Recessed. Ambience/UGR

KORPERseries

ArchitecturalINDOOR



5054

Downlight Recessed. Ambience/UGR

KORPERseries



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	40W	368x158x39mm	4872lm	3333lm	● 2700K	505312.B.P.C
SMD LED	40W	368x158x39mm	5200lm	3557lm	● 3000K	505313.B.P.C
SMD LED	40W	368x158x39mm	5528lm	3781lm	● 4000K	505314.B.P.C
SMD LED	40W	368x158x39mm	5741lm	3927lm	● 5000K	505315.B.P.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW - White / White WB - White / Black WMS - White / Matt Silver BB - Black / Black BW - Black / White BMS - Black / Matt Silver)



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	60W	368x248x39mm	7309lm	5262lm	● 2700K	505412.B.P.C
SMD LED	60W	368x248x39mm	7800lm	5616lm	● 3000K	505413.B.P.C
SMD LED	60W	368x248x39mm	8291lm	5970lm	● 4000K	505414.B.P.C
SMD LED	60W	368x248x39mm	8611lm	6200lm	● 5000K	505415.B.P.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off)


Colour Finish: C(WW - White / White WB - White / Black WMS - White / Matt SilverBB - Black / Black BW - Black / White BMS - Black / Matt Silver)



5055

Downlight Recessed. Ambience/UGR

KORPERseries



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	∅89x100mm	1462lm	1052lm	● 2700K	505512.B.P.C
COB LED	12W	∅89x100mm	1560lm	1123lm	● 3000K	505513.B.P.C
COB LED	12W	∅89x100mm	1658lm	1194lm	● 4000K	505514.B.P.C
COB LED	12W	∅89x100mm	1722lm	1240lm	● 5000K	505515.B.P.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW - White / White WB - White / Black WMS - White / Matt Silver BW - Black / White BMS - Black / Matt Silver Silver BB - Black / Black)




5056

Downlight Recessed. Ambience/UGR

KORPERseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	20W	∅109x100mm	2436lm	1579lm	● 2700K	505612.B.P.C
COB LED	20W	∅109x100mm	2600lm	1685lm	● 3000K	505613.B.P.C
COB LED	20W	∅109x100mm	2764lm	1761lm	○ 4000K	505614.B.P.C
COB LED	20W	∅109x100mm	2870lm	1860lm	○ 5000K	505615.B.P.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW - White / White WB - White / Black WMS - White / Matt Silver BW - Black / White BMS - Black / Matt Silver Silver BB - Black / Black)



5051

Downlight Recessed. Ambience/UGR

FOKUSseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	7W	∅60x60mm	813lm	502lm	● 2700K	505112.B.P.C
COB LED	7W	∅60x60mm	868lm	536lm	● 3000K	505113.B.P.C
COB LED	7W	∅60x60mm	923lm	569lm	○ 4000K	505114.B.P.C
COB LED	7W	∅60x60mm	958lm	591lm	○ 5000K	505115.B.P.C
COB LED	10W	∅85x75mm	1162lm	784lm	● 2700K	505122.B.P.C
COB LED	10W	∅85x75mm	1240lm	837lm	● 3000K	505123.B.P.C
COB LED	10W	∅85x75mm	1318lm	890lm	○ 4000K	505124.B.P.C
COB LED	10W	∅85x75mm	1369lm	924lm	○ 5000K	505125.B.P.C

Beam Angle: B(1-5° 2-8° 3-10° 4-25°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW-White/White BB-Black/Black)



5050

Downlight Recessed. Ambience/UGR

FLACHE series

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	10W	ø85x74mm	1265lm	911lm	● 2700K	505012.B.P.C
SMD LED	10W	ø85x74mm	1350lm	972lm	● 3000K	505013.B.P.C
SMD LED	10W	ø85x74mm	1435lm	1033lm	○ 4000K	505014.B.P.C
SMD LED	10W	ø85x74mm	1490lm	1073lm	○ 5000K	505015.B.P.C
SMD LED	18W	ø115x95mm	2277lm	1639lm	● 2700K	505022.B.P.C
SMD LED	18W	ø115x95mm	2430lm	1750lm	● 3000K	505023.B.P.C
SMD LED	18W	ø115x95mm	2583lm	1860lm	○ 4000K	505024.B.P.C
SMD LED	18W	ø115x95mm	2683lm	1932lm	○ 5000K	505025.B.P.C
SMD LED	25W	ø135x110.5mm	3162lm	2186lm	● 2700K	505032.B.P.C
SMD LED	25W	ø135x110.5mm	3375lm	2333lm	● 3000K	505033.B.P.C
SMD LED	25W	ø135x110.5mm	3588lm	2480lm	○ 4000K	505034.B.P.C
SMD LED	25W	ø135x110.5mm	3726lm	2575lm	○ 5000K	505035.B.P.C
SMD LED	42W	ø165x136mm	5313lm	3643lm	● 2700K	505042.B.P.C
SMD LED	42W	ø165x136mm	5670lm	3888lm	● 3000K	505043.B.P.C
SMD LED	42W	ø165x136mm	6027lm	4133lm	○ 4000K	505044.B.P.C
SMD LED	42W	ø165x136mm	6260lm	4292lm	○ 5000K	505045.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW-White/WhiteBB-Black/Black)




White / White Black / Black

5050

Downlight Recessed. Ambience/UGR

FLACHE series

Architectural INDOOR

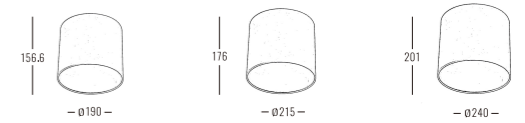

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	50W	ø190x156.6mm	6325lm	4736lm	● 2700K	505052.B.P.C
SMD LED	50W	ø190x156.6mm	6750lm	5054lm	● 3000K	505053.B.P.C
SMD LED	50W	ø190x156.6mm	7175lm	5373lm	○ 4000K	505054.B.P.C
SMD LED	50W	ø190x156.6mm	7452lm	5580lm	○ 5000K	505055.B.P.C
SMD LED	70W	ø215x176mm	8855lm	6148lm	● 2700K	505062.B.P.C
SMD LED	70W	ø215x176mm	9450lm	6561lm	● 3000K	505063.B.P.C
SMD LED	70W	ø215x176mm	10045lm	6974lm	○ 4000K	505064.B.P.C
SMD LED	70W	ø215x176mm	10433lm	7243lm	○ 5000K	505065.B.P.C
SMD LED	85W	ø240x201mm	10752lm	7172lm	● 2700K	505072.B.P.C
SMD LED	85W	ø240x201mm	11475lm	7655lm	● 3000K	505073.B.P.C
SMD LED	85W	ø240x201mm	12198lm	8137lm	○ 4000K	505074.B.P.C
SMD LED	85W	ø240x201mm	12668lm	8451lm	○ 5000K	505075.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW-White/WhiteBB-Black/Black)



White / White Black / Black

4840

Downlight Surface. Ambience/UGR

ORBISseries



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	Ø65x108mm	● 1394lm	● 1019lm	2700K	484012.B.P.C
COB LED	12W	Ø65x108mm	● 1488lm	● 1087lm	3000K	484013.B.P.C
COB LED	12W	Ø65x108mm	○ 1582lm	○ 1156lm	4000K	484014.B.P.C
COB LED	12W	Ø65x108mm	○ 1643lm	○ 1201lm	5000K	484015.B.P.C
COB LED	18W	Ø90x130mm	● 2091lm	● 1638lm	2700K	484022.B.P.C
COB LED	18W	Ø90x130mm	● 2232lm	● 1748lm	3000K	484023.B.P.C
COB LED	18W	Ø90x130mm	○ 2373lm	○ 1858lm	4000K	484024.B.P.C
COB LED	18W	Ø90x130mm	○ 2464lm	○ 1929lm	5000K	484025.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-55°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black GG-Gold/Gold GB-Gold/Black WB-White/Black BW-Black/White SS-Silver/Silver SB-Silver/Black)




5057

Downlight Recessed. Ambience/UGR

GELENKseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	79x79x110mm	1394lm	1092lm	● 2700K	505712.B.P.C
COB LED	12W	79x79x110mm	1488lm	1165lm	● 3000K	505713.B.P.C
COB LED	12W	79x79x110mm	1582lm	1239lm	● 4000K	505714.B.P.C
COB LED	12W	79x79x110mm	1643lm	1286lm	● 5000K	505715.B.P.C

Beam Angle: B(1-10° 2-23° 3-36°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW White/ White WB White/ Black BB - Black/ Black)




5058

Downlight Recessed. Ambience/UGR

GELENKseries

Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	79x79x110mm	1394lm	1092lm	● 2700K	505812.B.P.C
COB LED	12W	79x79x110mm	1488lm	1165lm	● 3000K	505813.B.P.C
COB LED	12W	79x79x110mm	1582lm	1239lm	● 4000K	505814.B.P.C
COB LED	12W	79x79x110mm	1643lm	1286lm	● 5000K	505815.B.P.C

Beam Angle: B(1-10° 2-23° 3-36°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW White/ White WB White/ Black BB - Black/ Black)



5065

Downlight Recessed. Ambience/UGR

PLATTEseries

ArchitecturalINDOOR



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP20	5 Years Warranty	AC220-240V 50/60Hz	CE	Gypsum	120°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	--------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	7W	110x110x70mm	813lm	535lm	● 2700K	506512.B.P.C
SMD LED	7W	110x110x70mm	868lm	571lm	● 3000K	506513.B.P.C
SMD LED	7W	110x110x70mm	923lm	607lm	● 4000K	506514.B.P.C
SMD LED	7W	110x110x70mm	958lm	631lm	● 5000K	506515.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(W-White)





White

5066

Downlight Recessed. Ambience/UGR

PLATTEseries

ArchitecturalINDOOR



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP20	5 Years Warranty	AC220-240V 50/60Hz	CE	Gypsum	120°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	--------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	7x2W	210x110x70mm	1627lm	1004lm	● 2700K	506612.B.P.C
SMD LED	7x2W	210x110x70mm	1736lm	1071lm	● 3000K	506613.B.P.C
SMD LED	7x2W	210x110x70mm	1845lm	1139lm	● 4000K	506614.B.P.C
SMD LED	7x2W	210x110x70mm	1917lm	1183lm	● 5000K	506615.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(W-White)





White

5067

Downlight Recessed. Ambience/UGR

PLATTEseries

ArchitecturalINDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	7x3W	310x110x70mm	2324lm	1506lm	● 2700K	506712.B.P.C
SMD LED	7x3W	310x110x70mm	2480lm	1607lm	● 3000K	506713.B.P.C
SMD LED	7x3W	310x110x70mm	2636lm	1708lm	● 4000K	506714.B.P.C
SMD LED	7x3W	310x110x70mm	2738lm	1774lm	● 5000K	506715.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(W-White)



5068

Downlight Recessed. Ambience/UGR

PLATTEseries

ArchitecturalINDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	7x4W	210x210x70mm	3043lm	2035lm	● 2700K	506812.B.P.C
SMD LED	7x4W	210x210x70mm	3248lm	2172lm	● 3000K	506813.B.P.C
SMD LED	7x4W	210x210x70mm	3453lm	2308lm	● 4000K	506814.B.P.C
SMD LED	7x4W	210x210x70mm	3586lm	2397lm	● 5000K	506815.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(W-White)




5069

Downlight Recessed. Ambience/UGR

PLATTEseries

Architectural INDOOR




5070

Downlight Recessed. Ambience/UGR

PLATTEseries

Architectural INDOOR



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP20	5 Years Warranty	AC220-240V 50/60Hz	CE	Gypsum	120°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	--------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	7x6W	310x210x70mm	4648lm	3012lm	● 2700K	506912.B.P.C
SMD LED	7x6W	310x210x70mm	4960lm	3214lm	● 3000K	506913.B.P.C
SMD LED	7x6W	310x210x70mm	5272lm	3417lm	● 4000K	506914.B.P.C
SMD LED	7x6W	310x210x70mm	5476lm	3548lm	● 5000K	506915.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(W-White)



White

OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP20	5 Years Warranty	AC220-240V 50/60Hz	CE	Gypsum	120°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	--------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	7x2W	215x165x110mm	1627lm	1004lm	● 2700K	507012.B.P.C
SMD LED	7x2W	215x165x110mm	1736lm	1071lm	● 3000K	507013.B.P.C
SMD LED	7x2W	215x165x110mm	1845lm	1139lm	● 4000K	507014.B.P.C
SMD LED	7x2W	215x165x110mm	1917lm	1183lm	● 5000K	507015.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(W-White)




White

5071

Downlight Recessed. Ambience/UGR

PLATTEseries

Architectural INDOOR



OSRAM	SMD	LED	LM80	Fixed	Ra >90	UGR <19	IP20	5 Years Warranty	AC220-240V	50/60Hz	CE	Gypsum	120°
-------	-----	-----	------	-------	--------	---------	------	------------------	------------	---------	----	--------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	7x3W	265x215x110mm	2324lm	1506lm	● 2700K	507112.B.P.C
SMD LED	7x3W	265x215x110mm	2480lm	1607lm	● 3000K	507113.B.P.C
SMD LED	7x3W	265x215x110mm	2636lm	1708lm	○ 4000K	507114.B.P.C
SMD LED	7x3W	265x215x110mm	2738lm	1774lm	○ 5000K	507115.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(W-White)



5072

Downlight Recessed. Ambience/UGR

PLATTEseries

Architectural INDOOR



OSRAM	SMD	LED	LM80	Fixed	Ra >90	UGR <19	IP20	5 Years Warranty	AC220-240V	50/60Hz	CE	Gypsum	120°
-------	-----	-----	------	-------	--------	---------	------	------------------	------------	---------	----	--------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	7x5W	370x270x110mm	4067lm	2677lm	● 2700K	507212.B.P.C
SMD LED	7x5W	370x270x110mm	4340lm	2857lm	● 3000K	507213.B.P.C
SMD LED	7x5W	370x270x110mm	4613lm	3037lm	○ 4000K	507214.B.P.C
SMD LED	7x5W	370x270x110mm	4791lm	3154lm	○ 5000K	507215.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)


Colour Finish: C(W-White)



5073

Downlight Recessed. Ambience/UGR

PLATTEseries



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP20	5 Years Warranty	AC220-240V 50/60Hz	CE	Gypsum	120°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	--------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	7W	ø110x70mm	813lm	535lm	● 2700K	507312.B.P.C
SMD LED	7W	ø110x70mm	868lm	571lm	● 3000K	507313.B.P.C
SMD LED	7W	ø110x70mm	923lm	607lm	● 4000K	507314.B.P.C
SMD LED	7W	ø110x70mm	958lm	631lm	● 5000K	507315.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(W-White)




5074

Downlight Recessed. Ambience/UGR

PLATTEseries

Architectural INDOOR



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP20	5 Years Warranty	AC220-240V 50/60Hz	CE	Gypsum	120°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	--------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	7x2W	215x110x110mm	1627lm	1004lm	● 2700K	507212.B.P.C
SMD LED	7x2W	215x110x110mm	1736lm	1071lm	● 3000K	507213.B.P.C
SMD LED	7x2W	215x110x110mm	1845lm	1139lm	○ 4000K	507214.B.P.C
SMD LED	7x2W	215x110x110mm	1917lm	1183lm	○ 5000K	507215.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(W-White)




5075

Downlight Recessed. Ambience/UGR

PLATTEseries

Architectural INDOOR



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP20	5 Years Warranty	AC220-240V 50/60Hz	CE	Gypsum	120°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	--------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	7x3W	260x170x110mm	2324lm	1506lm	● 2700K	507312.B.P.C
SMD LED	7x3W	260x170x110mm	2480lm	1607lm	● 3000K	507313.B.P.C
SMD LED	7x3W	260x170x110mm	2636lm	1708lm	○ 4000K	507314.B.P.C
SMD LED	7x3W	260x170x110mm	2738lm	1774lm	○ 5000K	507315.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(W-White)



4441

Downlight Recessed. Ambience/UGR

SENSIOseries



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	ø80x90mm	1394lm	1092lm	● 2700K	444112.B.P.C
COB LED	12W	ø80x90mm	1488lm	1165lm	● 3000K	444113.B.P.C
COB LED	12W	ø80x90mm	1582lm	1239lm	● 4000K	444114.B.P.C
COB LED	12W	ø80x90mm	1643lm	1286lm	● 5000K	444115.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW-White/White BW - Black / White)





White/White Black/White

4442

Downlight Recessed. Ambience/UGR

SENSIOseries

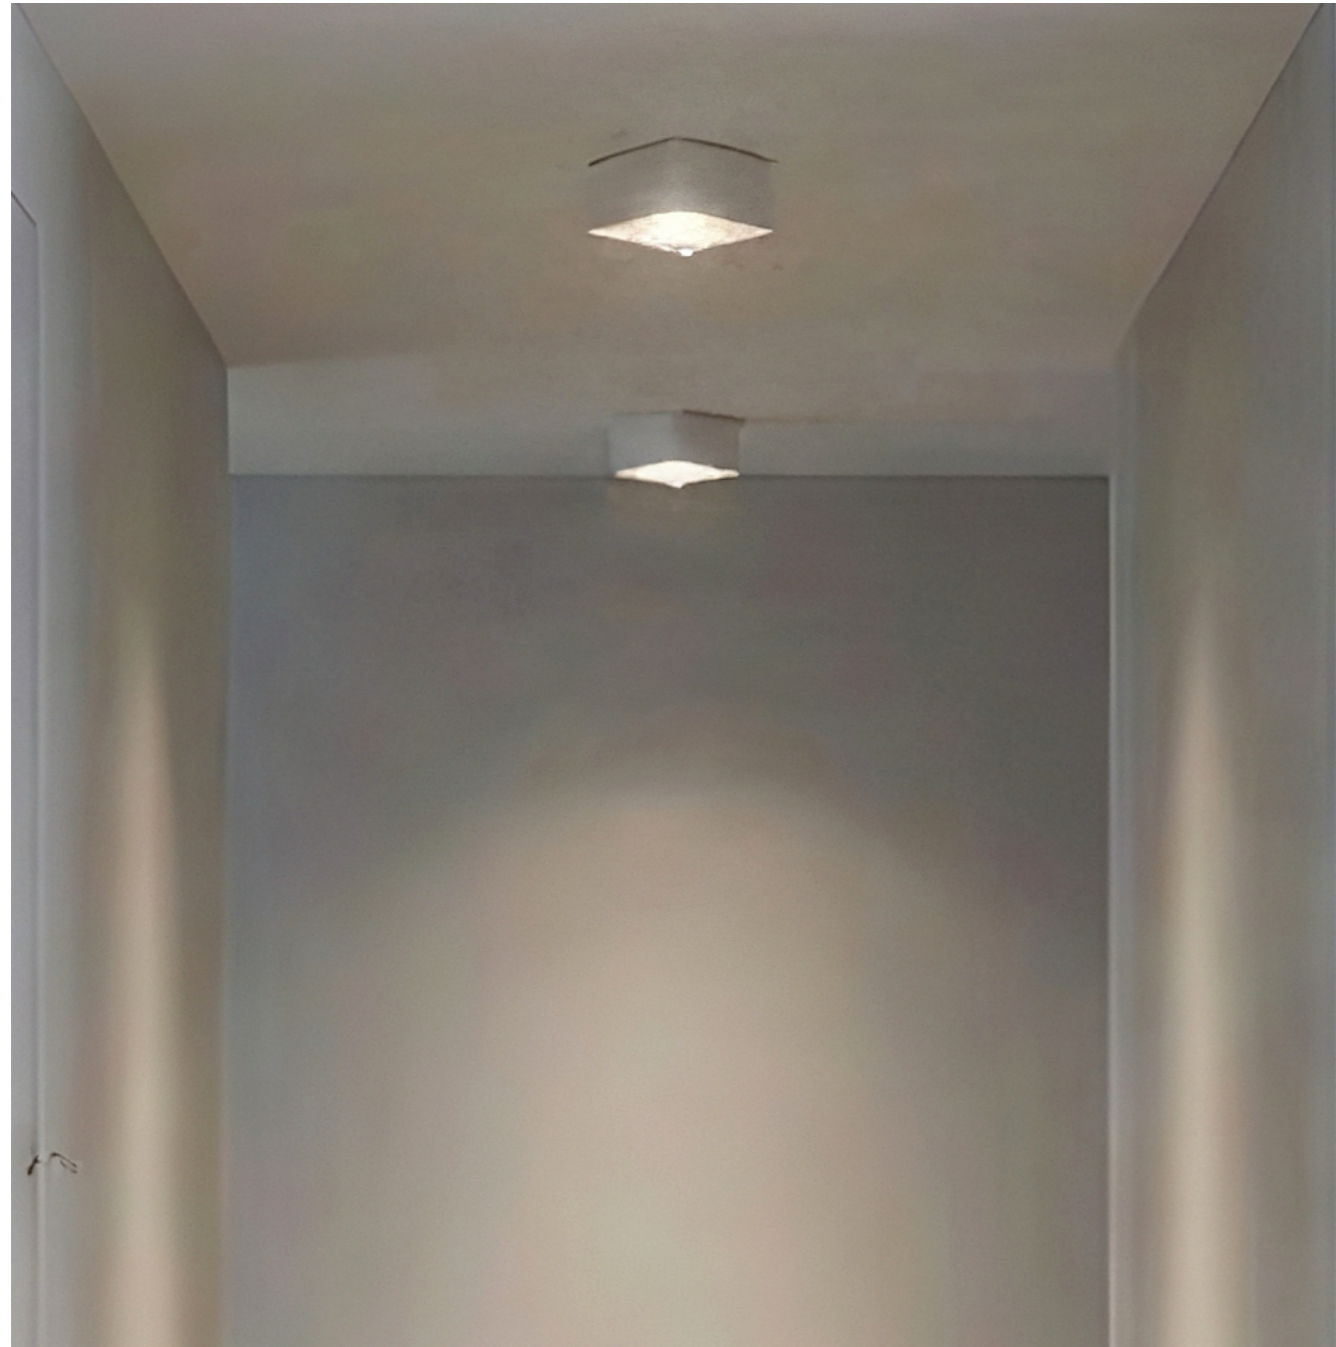

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	117x117x50mm	1394lm	1092lm	● 2700K	472012.B.P.C
COB LED	12W	117x117x50mm	1488lm	1165lm	● 3000K	472013.B.P.C
COB LED	12W	117x117x50mm	1582lm	1239lm	○ 4000K	472014.B.P.C
COB LED	12W	117x117x50mm	1643lm	1286lm	○ 5000K	472015.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off)

Colour Finish: C(WW-White/White BW - Black / White)



White/White Black/White