






LANDSCAPE LIGHT


- 


LANDSCAPE 7060
6W
P.1
- 


LANDSCAPE 7061
12W
P.2
- 


LANDSCAPE 7062
15W
P.3
- 


LANDSCAPE 7063
10W
P.4
- 


LANDSCAPE 7064
10W
P.6
- 


LANDSCAPE 7065
7W
P.8
- 


LANDSCAPE 7066
12W
P.10
- 

LANDSCAPE 7067
14W
P.11
- 

LANDSCAPE 7068
5W
P.12
- 

LANDSCAPE 7069
10W
P.13
- 

LANDSCAPE 7070
20W
P.14
- 

LANDSCAPE 7067
100W
P.15
- 

LANDSCAPE 7068
200W
P.16


7060

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65

ArchitecturalOUTDOOR




OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP65	5 years Warranty	AC220-240V 50/60Hz	CE	Die-cast Aluminum Heatsink	12° 24° 36° 60°
--------------------	-----	-------------	-------	-----------	------------	------	---------------------	-----------------------	----	-------------------------------	-----------------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	6W	ø105x800mm	506lm	319lm	● 2700K	706012.B.P.C
SMD LED	6W	ø105x800mm	540lm	340lm	● 3000K	706013.B.P.C
SMD LED	6W	ø105x800mm	574lm	362lm	○ 4000K	706014.B.P.C
SMD LED	6W	ø105x800mm	596lm	376lm	○ 5000K	706015.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)



Für allgemeine Anfragen, technischen Support oder Informationen zur Treiberkompatibilität – www.pochelicht.de.
For general enquiries, technical support, or driver compatibility details – www.pochelicht.de.


7061

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65

ArchitecturalOUTDOOR




OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >80	UGR <19	IP65	5 years Warranty	AC100-277V 50/60Hz	CE	Die-cast Aluminum Heatsink	15° 30° 60° 120° 140°
--------------------	-----	-------------	-------	-----------	------------	------	---------------------	-----------------------	----	-------------------------------	-----------------------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	12W	ø120x800mm	1012lm	638lm	● 2700K	706112.B.P.C
SMD LED	12W	ø120x800mm	1080lm	680lm	● 3000K	706113.B.P.C
SMD LED	12W	ø120x800mm	1148lm	723lm	○ 4000K	706114.B.P.C
SMD LED	12W	ø120x800mm	1192lm	751lm	○ 5000K	706115.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)

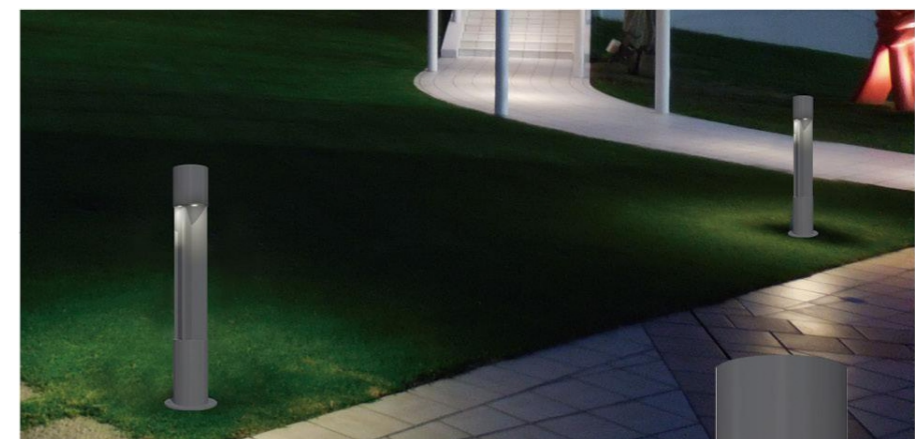

Für allgemeine Anfragen, technischen Support oder Informationen zur Treiberkompatibilität – www.pochelicht.de.
For general enquiries, technical support, or driver compatibility details – www.pochelicht.de.


7062

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65

ArchitecturalOUTDOOR




OSRAM 50,000hrs | SMD LED LM80 | Fixed | Ra >90 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 12° 24° 36° 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	15W	350x800mm	1455lm	1039lm	● 2700K	706212.B.P.C
SMD LED	15W	350x800mm	1553lm	1108lm	● 3000K	706213.B.P.C
SMD LED	15W	350x800mm	1650lm	1178lm	○ 4000K	706214.B.P.C
SMD LED	15W	350x800mm	1714lm	1224lm	○ 5000K	706215.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1 -Black 2 - Grey)





7063

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65

ArchitecturalOUTDOOR



OSRAM 50,000hrs | SMD LED LM80 | Fixed | Ra >80 | UGR <19 | IP65 | 5 years Warranty | AC100-277V 50/60Hz | CE | Die-cast Aluminum Heatsink | 15° 30° 60° 120° 140°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	10W	238x40x700mm	970lm	970lm	● 2700K	706312.B.P.C
SMD LED	10W	238x40x700mm	1035lm	1035lm	● 3000K	706313.B.P.C
SMD LED	10W	238x40x700mm	1100lm	1100lm	○ 4000K	706314.B.P.C
SMD LED	10W	238x40x700mm	1143lm	1143lm	○ 5000K	706315.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1 -Black 2 - Grey)




7064

Downlight Recessed. Ambience/UGR

LANDSCAPE series

IP65



OSRAM 50,000hrs SMD LED LM80 Fixed Ra >80 UGR <19 IP65 5 years Warranty AC100-277V 50/60Hz CE Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	10W	160x55x300mm	843lm	543lm	● 2700K	706412.B.P.C
SMD LED	10W	160x55x300mm	900lm	580lm	● 3000K	706413.B.P.C
SMD LED	10W	160x55x300mm	957lm	616lm	○ 4000K	706414.B.P.C
SMD LED	10W	160x55x300mm	994lm	640lm	○ 5000K	706415.B.P.C
SMD LED	10W	160x55x300mm	843lm	543lm	● 2700K	706422.B.P.C
SMD LED	10W	160x55x300mm	900lm	580lm	● 3000K	706423.B.P.C
SMD LED	10W	160x55x300mm	957lm	616lm	○ 4000K	706424.B.P.C
SMD LED	10W	160x55x300mm	994lm	640lm	○ 5000K	706425.B.P.C
SMD LED	10W	160x55x800mm	843lm	543lm	● 2700K	706432.B.P.C
SMD LED	10W	160x55x800mm	900lm	580lm	● 3000K	706433.B.P.C
SMD LED	10W	160x55x800mm	957lm	616lm	○ 4000K	706434.B.P.C
SMD LED	10W	160x55x800mm	994lm	640lm	○ 5000K	706435.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)



Black Grey

7065

Downlight Recessed. Ambience/UGR

LANDSCAPE series

IP65




OSRAM 50,000hrs SMD LED LM80 Fixed Ra >80 UGR <19 IP65 5 years Warranty AC100-277V 50/60Hz CE Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	7W	ø65x200x300mm	679lm	499lm	● 2700K	706512.B.P.C
SMD LED	7W	ø65x200x300mm	725lm	533lm	● 3000K	706513.B.P.C
SMD LED	7W	ø65x200x300mm	770lm	566lm	● 4000K	706514.B.P.C
SMD LED	7W	ø65x200x300mm	800lm	571lm	● 5000K	706515.B.P.C
SMD LED	7W	ø65x200x300mm	679lm	499lm	● 2700K	706522.B.P.C
SMD LED	7W	ø65x200x300mm	725lm	533lm	● 3000K	706523.B.P.C
SMD LED	7W	ø65x200x300mm	770lm	566lm	● 4000K	706524.B.P.C
SMD LED	7W	ø65x200x300mm	800lm	571lm	● 5000K	706525.B.P.C
SMD LED	7W	ø65x200x800mm	679lm	499lm	● 2700K	706532.B.P.C
SMD LED	7W	ø65x200x800mm	725lm	533lm	● 3000K	706533.B.P.C
SMD LED	7W	ø65x200x800mm	770lm	566lm	● 4000K	706534.B.P.C
SMD LED	7W	ø65x200x800mm	800lm	571lm	● 5000K	706535.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)



7066

Downlight Recessed. Ambience/UGR

LANDSCAPE series

IP65




OSRAM | SMD | LED LM80 | Fixed | Ra >80 | UGR <19 | IP65 | 5 years Warranty | AC100-277V 50/60Hz | CE | Die-cast Aluminum Heatsink | 15° | 30° | 60° | 120° | 140°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	12W	280x800mm	1063lm	781lm	● 2700K	706612.B.P.C
SMD LED	12W	280x800mm	1134lm	833lm	● 3000K	706613.B.P.C
SMD LED	12W	280x800mm	1205lm	932lm	○ 4000K	706614.B.P.C
SMD LED	12W	280x800mm	1252lm	920lm	○ 5000K	706615.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)



7067

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65



ArchitecturalOUTDOOR




OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP65	5 years Warranty	AC220-240V 50/60Hz	CE	Die-cast Aluminum Heatsink	12° 24° 36° 60°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	-------------------------------	-----------------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	14W	ø60x600mm	1358lm	998lm	● 2700K	706712.B.P.C
SMD LED	14W	ø60x600mm	1449lm	1065lm	● 3000K	706713.B.P.C
SMD LED	14W	ø60x600mm	1540lm	1132lm	○ 4000K	706714.B.P.C
SMD LED	14W	ø60x600mm	1600lm	1176lm	○ 5000K	706715.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1 -Black 2 - Grey)



7068

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65



ArchitecturalOUTDOOR




OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >80	UGR <19	IP65	5 years Warranty	AC100-277V 50/60Hz	CE	Die-cast Aluminum Heatsink	15° 30° 60° 120° 140°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	-------------------------------	-----------------------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	5W	ø50x500mm	422lm	266lm	● 2700K	706812.B.P.C
SMD LED	5W	ø50x500mm	450lm	284lm	● 3000K	706813.B.P.C
SMD LED	5W	ø50x500mm	478lm	301lm	○ 4000K	706814.B.P.C
SMD LED	5W	ø50x500mm	497lm	313lm	○ 5000K	706815.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1 -Black 2 - Grey)



7069

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65



ArchitecturalOUTDOOR





Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	10W	ø50x1000mm	843lm	531lm	● 2700K	706912.B.P.C
SMD LED	10W	ø50x1000mm	900lm	567lm	● 3000K	706913.B.P.C
SMD LED	10W	ø50x1000mm	957lm	603lm	○ 4000K	706914.B.P.C
SMD LED	10W	ø50x1000mm	994lm	626lm	○ 5000K	706915.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1 -Black 2 - Grey)

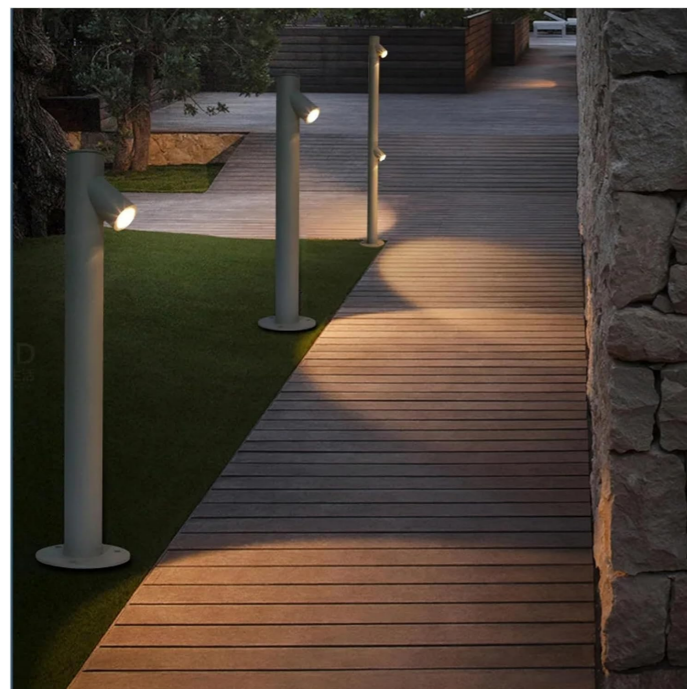

7070

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65



ArchitecturalOUTDOOR




Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	20W	ø50x1000mm	1687lm	1063lm	● 2700K	707012.B.P.C
SMD LED	20W	ø50x1000mm	1800lm	1134lm	● 3000K	707013.B.P.C
SMD LED	20W	ø50x1000mm	1913lm	1205lm	○ 4000K	707014.B.P.C
SMD LED	20W	ø50x1000mm	1987lm	1252lm	○ 5000K	707015.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1 -Black 2 - Grey)



7071

Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65



ArchitecturalOUTDOOR





OSRAM 50,000hrs
SMD
LED LM80
Fixed
Ra >90
UGR <19
IP65
5 years Warranty
AC220-240V 50/60Hz
CE
Die-cast Aluminum Heatsink
12°
24°
36°
60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	100W	680x3300mm	8433lm	6493lm	● 2700K	707112.B.P.C
SMD LED	100W	680x3300mm	10000lm	7700lm	● 3000K	707113.B.P.C
SMD LED	100W	680x3300mm	10630lm	8185lm	○ 4000K	707114.B.P.C
SMD LED	100W	680x3300mm	11040lm	8501lm	○ 5000K	707115.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)

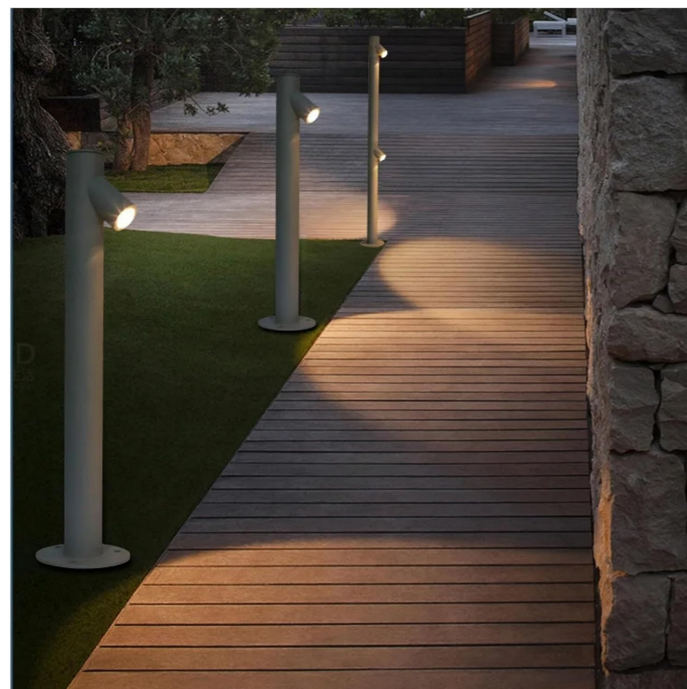

7072


Downlight Recessed. Ambience/UGR

LANDSCAPEseries

IP65



ArchitecturalOUTDOOR



OSRAM 50,000hrs
SMD
LED LM80
Fixed
Ra >80
UGR <19
IP65
5 years Warranty
AC100-277V 50/60Hz
CE
Die-cast Aluminum Heatsink
15°
30°
60°
120°
140°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	200W	1200x3100mm	16866lm	12987lm	● 2700K	707212.B.P.C
SMD LED	200W	1200x3100mm	20000lm	15400lm	● 3000K	707213.B.P.C
SMD LED	200W	1200x3100mm	21260lm	16370lm	○ 4000K	707214.B.P.C
SMD LED	200W	1200x3100mm	22080lm	17002lm	○ 5000K	707215.B.P.C

Beam Angle: B(1-15°2-24°3-36°4-60°)

Power Supply: P(1-On/Off 2-0-10V Dim 3-DALI Dim)

Colour Finish: C(1-Black 2-Grey)

