



MAGNATIC



MAGNETIC-T 8010
10W/20W/25W/30W
P.3



MAGNETIC-T 8011
6W/12W/18W/24W
P.4



MAGNETIC-T 8012
6W/12W/18W
P.5



MAGNETIC-T 8013
7W/12W/18W/24W
P.6



MAGNETIC-T 8014
5W/12W/18W/24W
P.7



MAGNETIC-T 8015
7W/12W/18W
P.8



MAGNETIC-T 8016
7W/12W/18W
P.9



MAGNETIC 8030
1000mm/2000mm/3000mm
P.11




MAGNETIC 8031
1000mm/2000mm/3000mm
P.12



MAGNETIC 8032
1000mm/2000mm/3000mm
P.13



MAGNETIC 8033
1000mm/2000mm/3000mm
P.14

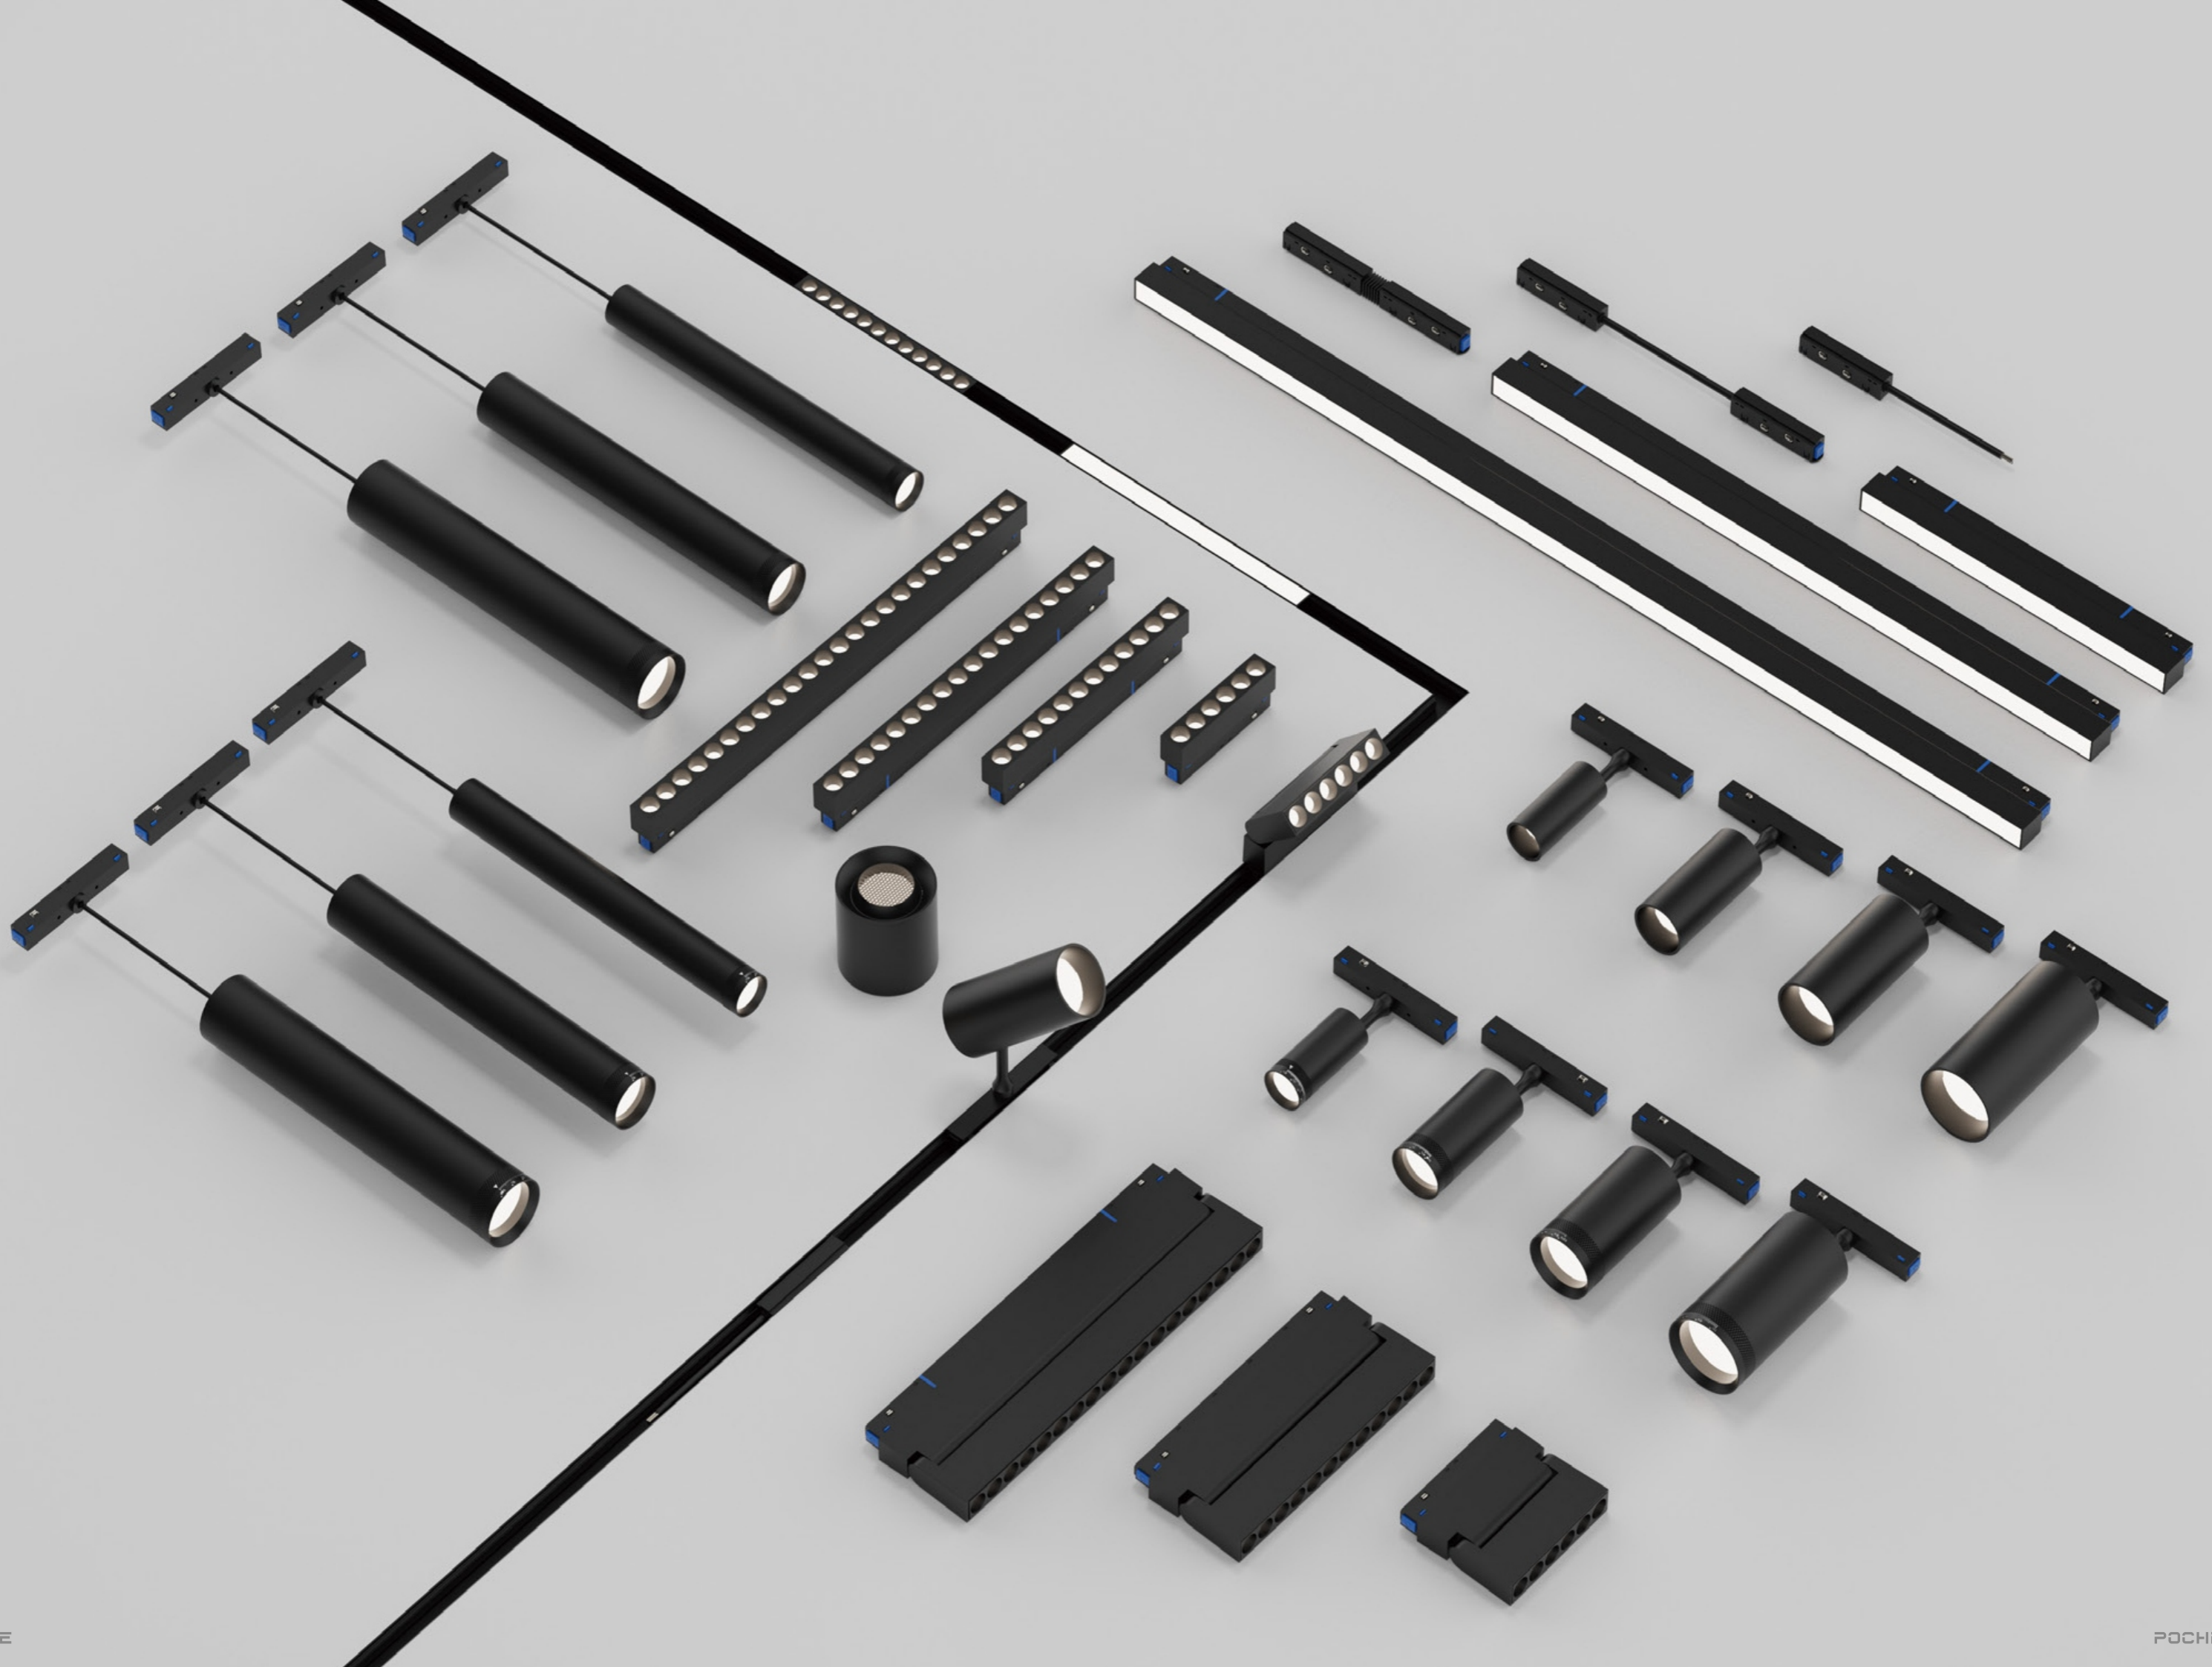


8010

Architectural INDOOR

Magnetic Linear. Ambience/Luminous

MAGNETIC series

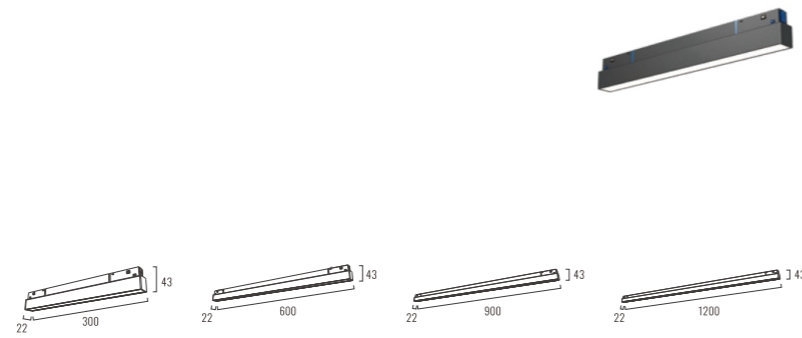

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	10W	300x22x43mm	1162lm	848lm	● 2700K	801012.B.P.C
SMD LED	10W	300x22x43mm	1240lm	930lm	● 3000K	801013.B.P.C
SMD LED	10W	300x22x43mm	1318lm	1028lm	○ 4000K	801014.B.P.C
SMD LED	10W	300x22x43mm	1369lm	1068lm	○ 5000K	801015.B.P.C
SMD LED Zigbee Smart	0-12W	300x22x43mm	0-1369lm	0-1068lm	● 2700K--○ 6500K	801016.B.5.C
SMD LED	20W	600x22x43mm	2324lm	1696lm	● 2700K	801022.B.P.C
SMD LED	20W	600x22x43mm	2480lm	1860lm	● 3000K	801023.B.P.C
SMD LED	20W	600x22x43mm	2636lm	2056lm	○ 4000K	801024.B.P.C
SMD LED	20W	600x22x43mm	2738lm	2136lm	○ 5000K	801025.B.P.C
SMD LED Zigbee Smart	0-20W	600x22x43mm	0-2738lm	0-2136lm	● 2700K--○ 6500K	801026.B.5.C
SMD LED	25W	900x22x43mm	2905lm	2120lm	● 2700K	801032.B.P.C
SMD LED	25W	900x22x43mm	3100lm	2325lm	● 3000K	801033.B.P.C
SMD LED	25W	900x22x43mm	3295lm	2570lm	○ 4000K	801034.B.P.C
SMD LED	25W	900x22x43mm	3422lm	2669lm	○ 5000K	801035.B.P.C
SMD LED	30W	1200x22x43mm	3486lm	2545lm	● 2700K	801042.B.P.C
SMD LED	30W	1200x22x43mm	3720lm	2790lm	● 3000K	801043.B.P.C
SMD LED	30W	1200x22x43mm	3954lm	3084lm	○ 4000K	801044.B.P.C
SMD LED	30W	1200x22x43mm	4107lm	3203lm	○ 5000K	801045.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(B-Black W-White)




8011

Architectural INDOOR

Magnetic Linear. Ambience/Luminous

MAGNETIC series

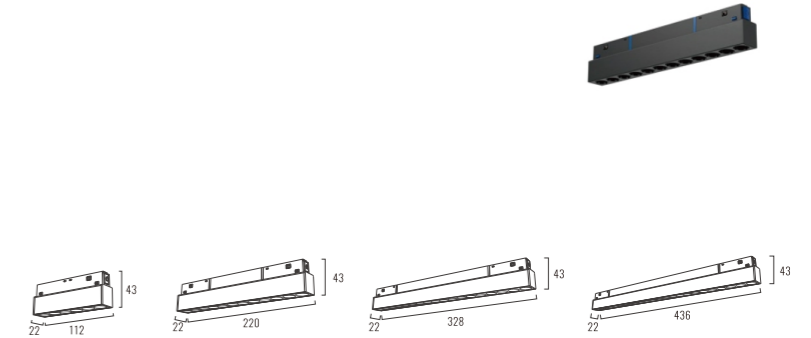

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	6W	112x22x43mm	697lm	509lm	● 2700K	801112.B.P.C
SMD LED	6W	112x22x43mm	744lm	558lm	● 3000K	801113.B.P.C
SMD LED	6W	112x22x43mm	791lm	617lm	○ 4000K	801114.B.P.C
SMD LED	6W	112x22x43mm	821lm	641lm	○ 5000K	801115.B.P.C
SMD LED	12W	220x22x43mm	1394lm	1018lm	● 2700K	801122.B.P.C
SMD LED	12W	220x22x43mm	1488lm	1116lm	● 3000K	801123.B.P.C
SMD LED	12W	220x22x43mm	1582lm	1234lm	○ 4000K	801124.B.P.C
SMD LED	12W	220x22x43mm	1643lm	1281lm	○ 5000K	801125.B.P.C
SMD LED Zigbee Smart	0-12W	220x22x43mm	0-1643lm	0-1281lm	● 2700K--○ 6500K	801126.B.5.C
SMD LED	18W	328x22x43mm	2091lm	1527lm	● 2700K	801132.B.P.C
SMD LED	18W	328x22x43mm	2232lm	1674lm	● 3000K	801133.B.P.C
SMD LED	18W	328x22x43mm	2373lm	1851lm	○ 4000K	801134.B.P.C
SMD LED	18W	328x22x43mm	2464lm	1922lm	○ 5000K	801135.B.P.C
SMD LED Zigbee Smart	0-18W	328x22x43mm	0-2464lm	0-1922lm	● 2700K--○ 6500K	801136.B.5.C
SMD LED	24W	436x22x43mm	2789lm	2036lm	● 2700K	801142.B.P.C
SMD LED	24W	436x22x43mm	2976lm	2232lm	● 3000K	801143.B.P.C
SMD LED	24W	436x22x43mm	3163lm	2468lm	○ 4000K	801144.B.P.C
SMD LED	24W	436x22x43mm	3286lm	2563lm	○ 5000K	801145.B.P.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(B-Black W-White)




8012

Architectural INDOOR

Magnetic Linear. Ambience/Luminous

MAGNETIC series



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	6W	112x22x105mm	697lm	509lm	● 2700K	801212.B.P.C
SMD LED	6W	112x22x105mm	744lm	558lm	● 3000K	801213.B.P.C
SMD LED	6W	112x22x105mm	791lm	617lm	○ 4000K	801214.B.P.C
SMD LED	6W	112x22x105mm	821lm	641lm	○ 5000K	801215.B.P.C
SMD LED	12W	220x22x105mm	1394lm	1018lm	● 2700K	801222.B.P.C
SMD LED	12W	220x22x105mm	1488lm	1116lm	● 3000K	801223.B.P.C
SMD LED	12W	220x22x105mm	1582lm	1234lm	○ 4000K	801224.B.P.C
SMD LED	12W	220x22x105mm	1643lm	1281lm	○ 5000K	801225.B.P.C
SMD LED Zigbee Smart	0-12W	220x22x105mm	0-1643lm	0-1281lm	● 2700K - ○ 6500K	801226.B.5.C
SMD LED	18W	330x22x105mm	2091lm	1527lm	● 2700K	801232.B.P.C
SMD LED	18W	330x22x105mm	2232lm	1674lm	● 3000K	801233.B.P.C
SMD LED	18W	330x22x105mm	2373lm	1851lm	○ 4000K	801234.B.P.C
SMD LED	18W	330x22x105mm	2464lm	1922lm	○ 5000K	801235.B.P.C
SMD LED Zigbee Smart	0-18W	330x22x105mm	0-2464lm	0-1922lm	● 2700K - ○ 6500K	801236.B.5.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(B-Black W-White)




8013

Architectural INDOOR

Magnetic Linear. Ambience/Luminous

MAGNETIC series

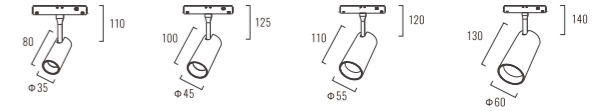

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	7W	∅35x80mm	813lm	594lm	● 2700K	801312.B.P.C
COB LED	7W	∅35x80mm	868lm	651lm	● 3000K	801313.B.P.C
COB LED	7W	∅35x80mm	923lm	720lm	○ 4000K	801314.B.P.C
COB LED	7W	∅35x80mm	958lm	747lm	○ 5000K	801315.B.P.C
COB LED	12W	∅45x100mm	1394lm	1018lm	● 2700K	801322.B.P.C
COB LED	12W	∅45x100mm	1488lm	1116lm	● 3000K	801323.B.P.C
COB LED	12W	∅45x100mm	1582lm	1234lm	○ 4000K	801324.B.P.C
COB LED	12W	∅45x100mm	1643lm	1281lm	○ 5000K	801325.B.P.C
COB LED Zigbee Smart	0-12W	∅45x100mm	0-1643lm	0-1281lm	● 2700K - ○ 6500K	801326.B.5.C
COB LED	18W	∅55x110mm	2091lm	1527lm	● 2700K	801332.B.P.C
COB LED	18W	∅55x110mm	2232lm	1674lm	● 3000K	801333.B.P.C
COB LED	18W	∅55x110mm	2373lm	1851lm	○ 4000K	801334.B.P.C
COB LED	18W	∅55x110mm	2464lm	1922lm	○ 5000K	801335.B.P.C
COB LED Zigbee Smart	0-18W	∅55x110mm	0-2464lm	0-1922lm	● 2700K - ○ 6500K	801336.B.5.C
COB LED	24W	∅60x130mm	2789lm	2036lm	● 2700K	801342.B.P.C
COB LED	24W	∅60x130mm	2976lm	2232lm	● 3000K	801343.B.P.C
COB LED	24W	∅60x130mm	3163lm	2468lm	○ 4000K	801344.B.P.C
COB LED	24W	∅60x130mm	3286lm	2563lm	○ 5000K	801345.B.P.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(B-Black W-White)



8014


Magnetic Linear. Ambience/Luminous

MAGNETIC series



Beam Angle Flexible and Adjustable

Architectural INDOOR

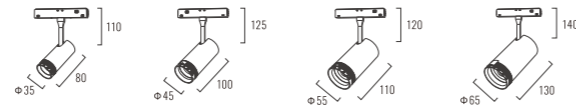

OSRAM 50,000hrs LED LM80 Fixed Ra >90 UGR <19 IP20 5 Years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 15° 20° 40° 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	ø35x80mm	581lm	424lm	● 2700K	801412.B.P.C
COB LED	5W	ø35x80mm	620lm	465lm	● 3000K	801413.B.P.C
COB LED	5W	ø35x80mm	659lm	514lm	○ 4000K	801414.B.P.C
COB LED	5W	ø35x80mm	684lm	534lm	○ 5000K	801415.B.P.C
COB LED	12W	ø45x100mm	1394lm	1018lm	● 2700K	801422.B.P.C
COB LED	12W	ø45x100mm	1488lm	1116lm	● 3000K	801423.B.P.C
COB LED	12W	ø45x100mm	1582lm	1234lm	○ 4000K	801424.B.P.C
COB LED	12W	ø45x100mm	1643lm	1281lm	○ 5000K	801425.B.P.C
COB LED Zigbee Smart	0-12W	ø45x100mm	0-1643lm	0-1281lm	● 2700K - ○ 6500K	801426.B.5.C
COB LED	18W	ø55x110mm	2091lm	1527lm	● 2700K	801432.B.P.C
COB LED	18W	ø55x110mm	2232lm	1674lm	● 3000K	801433.B.P.C
COB LED	18W	ø55x110mm	2373lm	1851lm	○ 4000K	801434.B.P.C
COB LED	18W	ø55x110mm	2464lm	1922lm	○ 5000K	801435.B.P.C
COB LED Zigbee Smart	0-18W	ø55x110mm	0-2464lm	0-1922lm	● 2700K - ○ 6500K	801436.B.5.C
COB LED	24W	ø65x130mm	2789lm	2036lm	● 2700K	801442.B.P.C
COB LED	24W	ø65x130mm	2976lm	2232lm	● 3000K	801443.B.P.C
COB LED	24W	ø65x130mm	3163lm	2468lm	○ 4000K	801444.B.P.C
COB LED	24W	ø65x130mm	3286lm	2563lm	○ 5000K	801445.B.P.C

Beam Angle: B(1-15° 2-20° 3-40° 4-60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)


Colour Finish: C(B-Black W-White)



8015

Magnetic Linear. Ambience/Luminous

MAGNETIC series

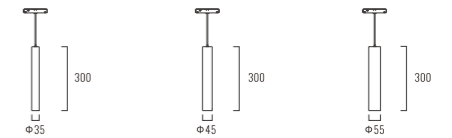

OSRAM 50,000hrs LED LM80 Fixed Ra >90 UGR <19 IP20 5 Years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 15° 24° 36°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	7W	ø35x300mm	813lm	594lm	● 2700K	801512.B.P.C
COB LED	7W	ø35x300mm	868lm	651lm	● 3000K	801513.B.P.C
COB LED	7W	ø35x300mm	923lm	720lm	○ 4000K	801514.B.P.C
COB LED	7W	ø35x300mm	958lm	747lm	○ 5000K	801515.B.P.C
COB LED	12W	ø45x300mm	1394lm	1018lm	● 2700K	801522.B.P.C
COB LED	12W	ø45x300mm	1488lm	1116lm	● 3000K	801523.B.P.C
COB LED	12W	ø45x300mm	1582lm	1234lm	○ 4000K	801524.B.P.C
COB LED	12W	ø45x300mm	1643lm	1281lm	○ 5000K	801525.B.P.C
COB LED Zigbee Smart	0-12W	ø45x300mm	0-1643lm	0-1281lm	● 2700K - ○ 6500K	801526.B.5.C
COB LED	18W	ø55x300mm	2091lm	1527lm	● 2700K	801532.B.P.C
COB LED	18W	ø55x300mm	2232lm	1674lm	● 3000K	801533.B.P.C
COB LED	18W	ø55x300mm	2373lm	1851lm	○ 4000K	801534.B.P.C
COB LED	18W	ø55x300mm	2464lm	1922lm	○ 5000K	801535.B.P.C
COB LED Zigbee Smart	0-18W	ø55x300mm	0-2464lm	0-1922lm	● 2700K - ○ 6500K	801536.B.5.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(B-Black W-White)



8016


Architectural INDOOR

Magnetic Linear. Ambience/Luminous

MAGNETIC series



Beam Angle Flexible and Adjustable

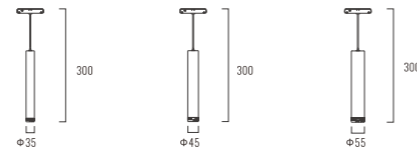

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	7W	Ø35x300mm	813lm	594lm	● 2700K	801612.B.P.C
COB LED	7W	Ø35x300mm	868lm	651lm	● 3000K	801613.B.P.C
COB LED	7W	Ø35x300mm	923lm	720lm	○ 4000K	801614.B.P.C
COB LED	7W	Ø35x300mm	958lm	747lm	○ 5000K	801615.B.P.C
COB LED	12W	Ø45x300mm	1394lm	1018lm	● 2700K	801622.B.P.C
COB LED	12W	Ø45x300mm	1488lm	1116lm	● 3000K	801623.B.P.C
COB LED	12W	Ø45x300mm	1582lm	1234lm	○ 4000K	801624.B.P.C
COB LED	12W	Ø45x300mm	1643lm	1281lm	○ 5000K	801625.B.P.C
COB LED Zigbee Smart	0-12W	Ø45x300mm	0-1643lm	0-1281lm	● 2700K - ○ 6500K	801626.B.5.C
COB LED	18W	Ø55x300mm	2091lm	1527lm	● 2700K	801632.B.P.C
COB LED	18W	Ø55x300mm	2232lm	1674lm	● 3000K	801633.B.P.C
COB LED	18W	Ø55x300mm	2373lm	1851lm	○ 4000K	801634.B.P.C
COB LED	18W	Ø55x300mm	2464lm	1922lm	○ 5000K	801635.B.P.C
COB LED Zigbee Smart	0-18W	Ø55x300mm	0-2464lm	0-1922lm	● 2700K - ○ 6500K	801636.B.5.C

Beam Angle: B(1-15° 2-24° 3-36°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(B-Black W-White)




8030

surface suspended. Ambience/Luminous

MAGNETIC series

Architectural INDOOR

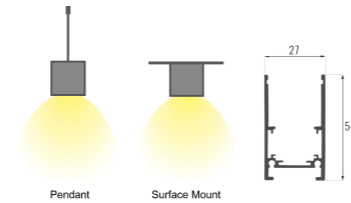


Code 8030.L.T.C

Length: B(1-1000mm 2-2000mm 3-3000mm)


Type: T(1-Surface 2-Pendant)

Colour Finish: C(1 - Sandy Black 2 - Sandy White)


Track Connection:




90° Corner Connector (Horizontal) Code: MAGS120PS001



90° Corner Connector (Vertical) Code: MAGS120PS002



T Corner Connector Code: MAGS120PS003



90° Corner Connector Code: MAGS120PS004



Suspension Strand Code: MAGS120PS007




End Cap Code: MAGS120PS005




Suspension Strand Code: MAGS120PS006

Connector:




LIVE End Code: MAGS12EC002




LIVE End DALI Code: MAGS12EC003



Connector 180° Code: MAGS12EC004



Connector Flex Code: MAGS12EC005




Connector Flex DIM Code: MAGS12EC006

8031

Slim Recessed. Ambience/Luminous

MAGNETIC series

Architectural INDOOR

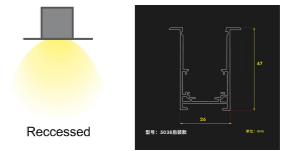


Code 8031.L.T.C

Length: B(1-1000mm 2-2000mm 3-3000mm)


Type: T(1-Recessed)

Colour Finish: C(1 - Sandy Black 2 - Sandy White)


Track Connection:




90° Corner Connector (Horizontal) Code: MAGS130PS001



90° Corner Connector (Vertical) Code: MAGS130PS002




T Corner Connector Code: MAGS130PS003



90° Corner Connector Code: MAGS130PS004




End Cap Code: MAGS130PS005




Track Connector Code: MAGS130PS006

Connector:




LIVE End Code: MAGS13EC002




LIVE End DALI Code: MAGS13EC003



Connector 180° Code: MAGS13EC004



Connector Flex Code: MAGS13EC005




Connector Flex DIM Code: MAGS13EC006

8032

Slim Recessed. Ambience/Luminous

MAGNETIC series

Architectural INDOOR

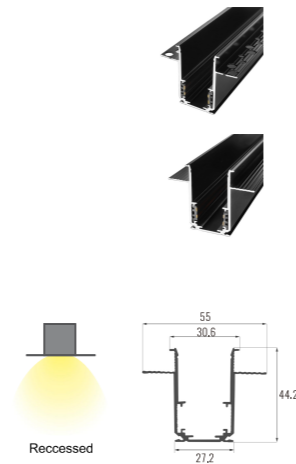


Code 8032.L.T.C

Length: B(1-1000mm 2-2000mm 3-3000mm)


Type: T(1-Recessed)

Colour Finish: C(1 - Sandy Black 2 - Sandy White)

Track Connection:

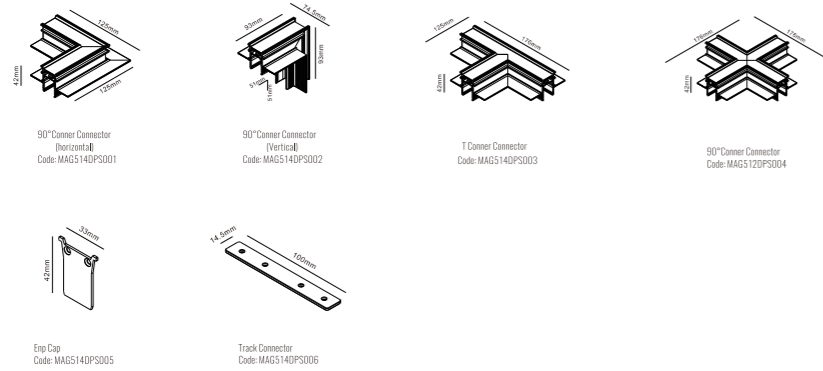

Connector:

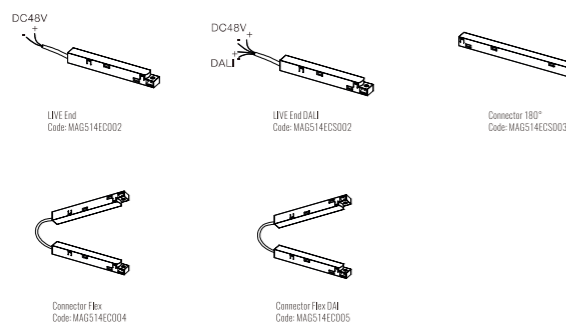


8033

Slim Recessed. Ambience/Luminous

MAGNETIC series

Architectural INDOOR

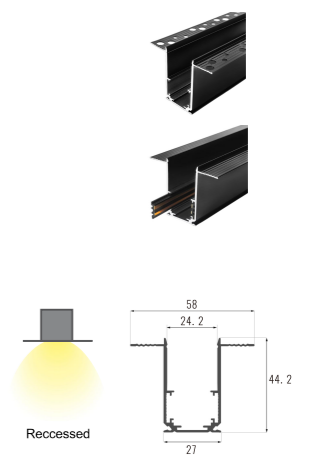


Code 8033.L.T.C

Length: B(1-1000mm 2-2000mm 3-3000mm)

Type: T(1-Recessed)

Colour Finish: C(1 - Sandy Black 2 - Sandy White)

Track Connection:

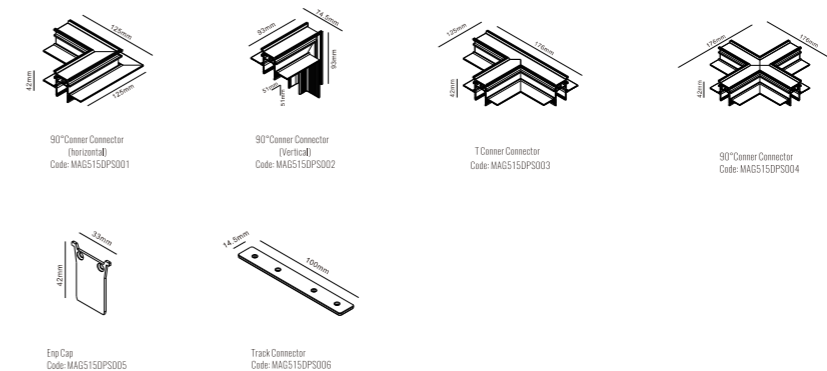

Connector:

