




OFFICE LIGHT



OFFICE 8050
25W
P.2



OFFICE 8051
25W
P.4



OFFICE 8052
25W
P.9



OFFICE 8053
25W
P.10



OFFICE 8054
25W
P.15



OFFICE 8055
25W
P.16





OFFICE 8056
25W
P.18

8050

Linear Surface. Ambience/UGR

OFFICE series



OSRAM 50,000hrs SMD LED LM80 Fixed Ra >90 UGR <19 IP20 5 years Warranty AC100-240V 50/60Hz CE PC + Aluminum 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	25W	1000x75x95mm	2811lm	2249lm	● 2700K	805012.B.P.C
SMD LED	25W	1000x75x95mm	3000lm	2460lm	● 3000K	805013.B.P.C
SMD LED	25W	1000x75x95mm	3189lm	2711lm	● 4000K	805014.B.P.C
SMD LED	25W	1000x75x95mm	3312lm	2815lm	● 5000K	805015.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim 4-Zigbee Smart)

Colour Finish: C(1-Black 2-White 3-Silver)


Length and power can be customized upon special request.
Länge und Leistung können auf Sonderwunsch individuell angepasst werden.



8051

Linear Surface. Ambience/UGR

OFFICE series



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP20	5 Years Warranty	AC100-240V 50/60Hz	CE	PMM +Aluminum	120°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	---------------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	25W	1000x103.5x110mm	2811lm	2193lm	● 2700K	805112.B.P.C
SMD LED	25W	1000x103.5x110mm	3000lm	2520lm	● 3000K	805113.B.P.C
SMD LED	25W	1000x103.5x110mm	3189lm	2679lm	● 4000K	805114.B.P.C
SMD LED	25W	1000x103.5x110mm	3312lm	2782lm	● 5000K	805115.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim 4-Zigbee Smart)

Colour Finish: C(1-Black 2-White 3-Silver)

Length and power can be customized upon special request.
Länge und Leistung können auf Sonderwunsch individuell angepasst werden.









8052

Linear Surface. Ambience/UGR

OFFICE series

Architectural OUTDOOR



OSRAM 50,000hrs | LED LM80 | Fixed | Ra <90 | UGR <19 | IP20 | 5 Years Warranty | AC100-240V 50/60Hz | CE | PMM +Aluminum | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	25W	1000x150x40mm	2811lm	2249lm	● 2700K	805212.B.P.C
SMD LED	25W	1000x150x40mm	3000lm	2460lm	● 3000K	805213.B.P.C
SMD LED	25W	1000x150x40mm	3189lm	2711lm	○ 4000K	805214.B.P.C
SMD LED	25W	1000x150x40mm	3312lm	2815lm	○ 5000K	805215.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim 4-Zigbee Smart)

Colour Finish: C(1 -Black 2 -White)

Length and power can be customized upon special request.
Länge und Leistung können auf Sonderwunsch individuell angepasst werden.




8053

Linear Surface. Ambience/UGR

OFFICE series

Architectural OUTDOOR



OSRAM 50,000hrs | SMD LED LM80 | Fixed | Ra >90 | UGR <19 | IP20 | 5 Years Warranty | AC100-240V 50/60Hz | CE | PMM +Aluminum | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	25W	1000x200x50mm	4273lm	3418lm	● 2700K	805312.B.P.C
SMD LED	25W	1000x200x50mm	4560lm	3739lm	● 3000K	805313.B.P.C
SMD LED	25W	1000x200x50mm	4847lm	4120lm	○ 4000K	805314.B.P.C
SMD LED	25W	1000x200x50mm	5034lm	4279lm	○ 5000K	805315.B.P.C


Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim 4-Zigbee Smart)

Colour Finish: C(1 -Black 2 -White)

Length and power can be customized upon special request.
Länge und Leistung können auf Sonderwunsch individuell angepasst werden.



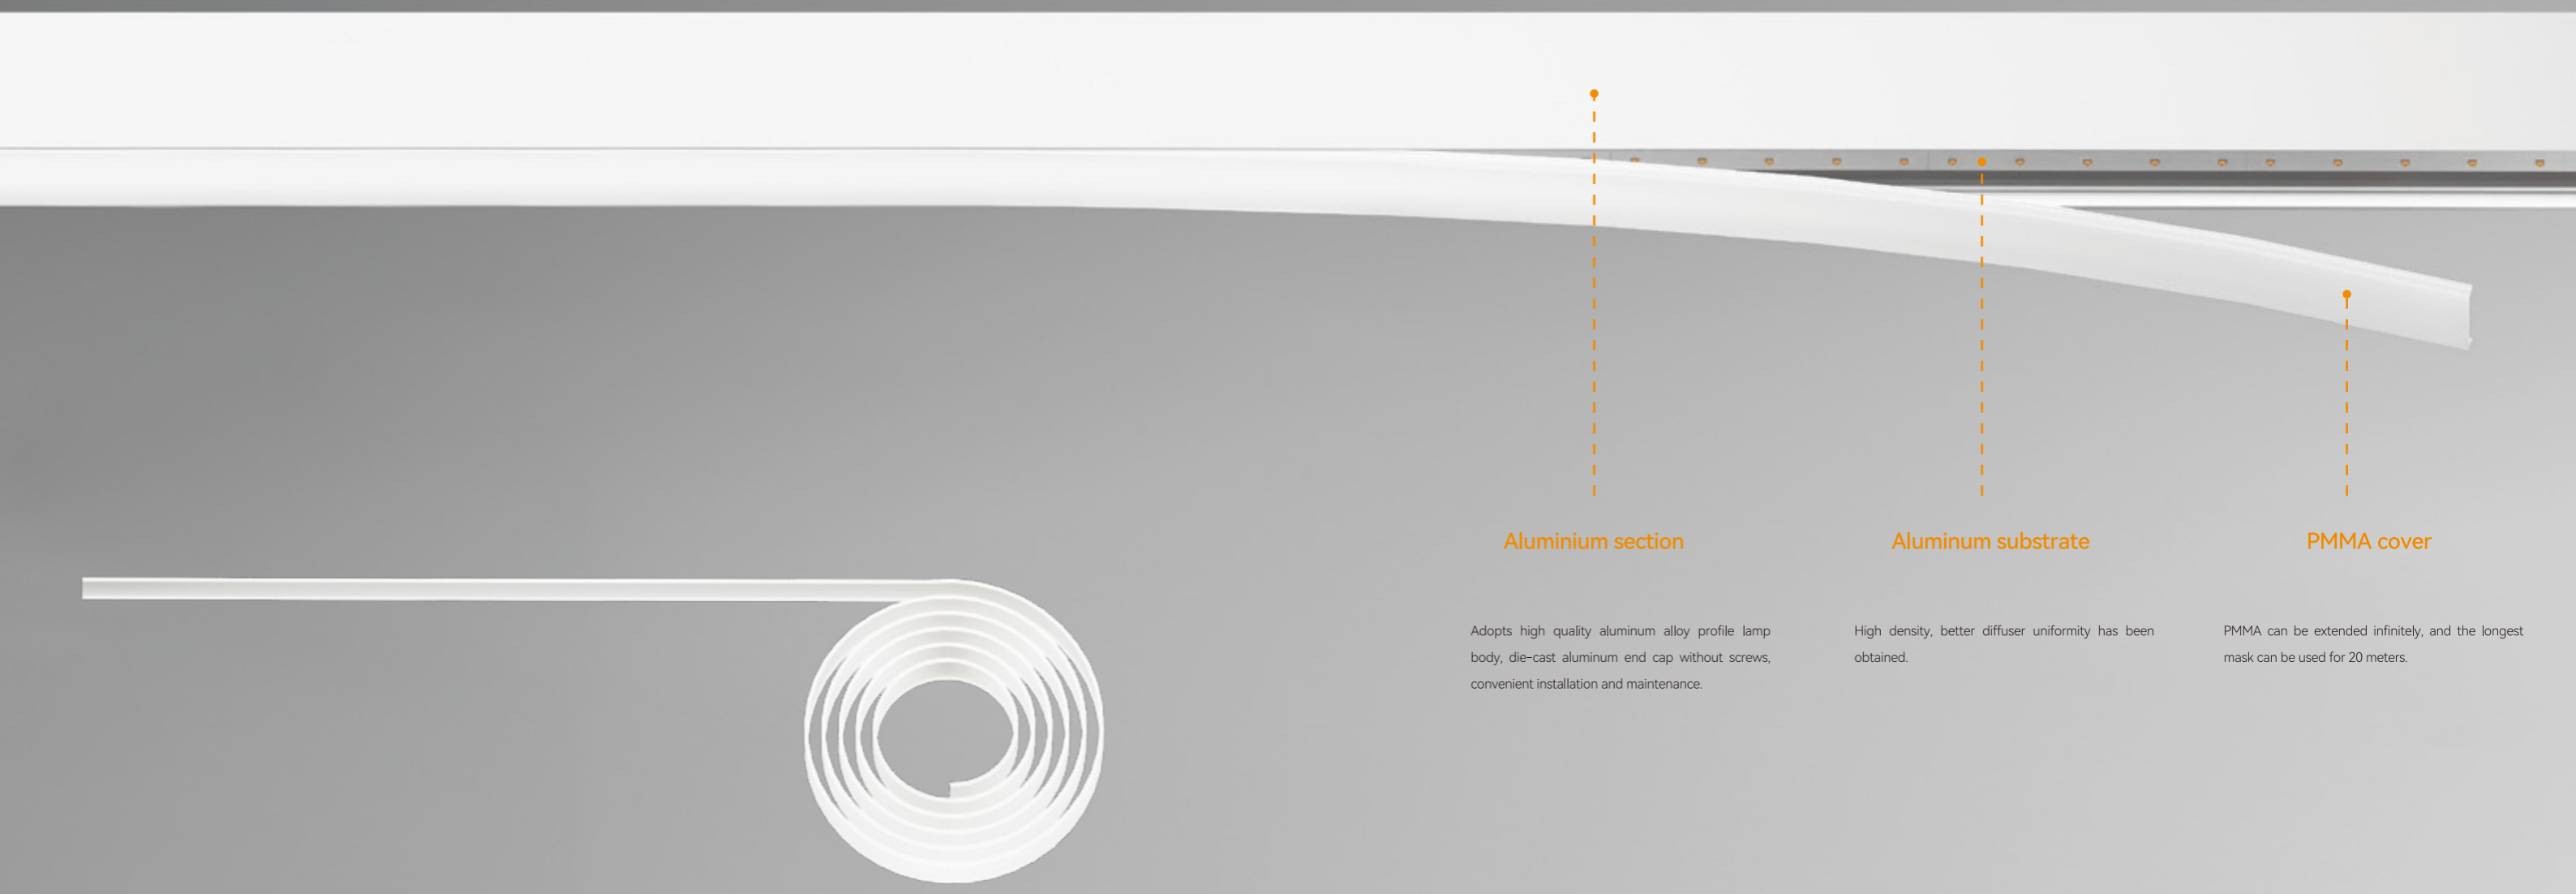

Aluminium section

Adopts high quality aluminum alloy profile lamp body, die-cast aluminum end cap without screws, convenient installation and maintenance.

Aluminum substrate

High density, better diffuser uniformity has been obtained.

PMMA cover

PMMA can be extended infinitely, and the longest mask can be used for 20 meters.





8054

Linear Surface. Ambience/UGR

OFFICE series

Architectural OUTDOOR



OSRAM 50,000hrs | LED LM80 | Fixed | Ra <90 | UGR <19 | IP20 | 5 Years Warranty | AC100-240V 50/60Hz | CE | PMM +Aluminum | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	25W	1000x35x69mm	2811lm	2249lm	● 2700K	805412.B.P.C
SMD LED	25W	1000x35x69mm	3000lm	2460lm	● 3000K	805413.B.P.C
SMD LED	25W	1000x35x69mm	3189lm	2711lm	○ 4000K	805414.B.P.C
SMD LED	25W	1000x35x69mm	3312lm	2815lm	○ 5000K	805415.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim 4-Zigbee Smart)

Colour Finish: C(1-Black 2-White 3-Silver)

Length and power can be customized upon special request.
Länge und Leistung können auf Sonderwunsch individuell angepasst werden.





8055

Linear Surface. Ambience/UGR

OFFICE series

Architectural OUTDOOR



OSRAM 50,000hrs | SMD LED LM80 | Fixed | Ra >90 | UGR <19 | IP20 | 5 Years Warranty | AC100-240V 50/60Hz | CE | PMM +Aluminum | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	25W	1000x55x75mm	2811lm	2249lm	● 2700K	805512.B.P.C
SMD LED	25W	1000x55x75mm	3000lm	2460lm	● 3000K	805513.B.P.C
SMD LED	25W	1000x55x75mm	3189lm	2711lm	○ 4000K	805514.B.P.C
SMD LED	25W	1000x55x75mm	3312lm	2815lm	○ 5000K	805515.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim 4-Zigbee Smart)

Colour Finish: C(1-Black 2-White 3-Silver)


Length and power can be customized upon special request.
Länge und Leistung können auf Sonderwunsch individuell angepasst werden.



8056

Linear Surface. Ambience/UGR

OFFICE series

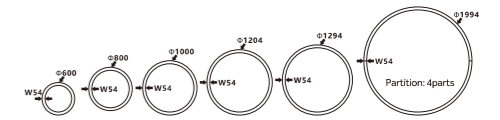

 IP54


















Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	25W	1000x55x75mm	2702lm	2170lm	● 2700K	805612.S.P.C.H
SMD LED	25W	1000x55x75mm	3000lm	2460lm	● 3000K	805612.S.P.C.H
SMD LED	25W	1000x55x75mm	3189lm	2711lm	● 4000K	805612.S.P.C.H
SMD LED	25W	1000x55x75mm	3312lm	2815lm	● 5000K	805612.S.P.C.H

Size: S(1-D600mm 2-D800mm 3-D1000mm 4-D1204mm 5-D1294mm 6-D1994mm)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim 4-Zigbee Smart)

Colour Finish: C(1-Black 2-White 3-Silver)

Height: H(1- 2- 3- 4-)

