

STREET LIGHT



STREET LIGHT 7018  
30W/100W/150W/200W/240W  
P.3-4



STREET LIGHT 7019  
40W/60W/100W/150W  
200W/240W/300W  
P.7-8



STREET LIGHT 7020  
50W  
P.9




STREET LIGHT 7021  
2\*50W  
P.10

7018

Downlight Recessed. Ambience/UGR

**STREET LIGHT** series

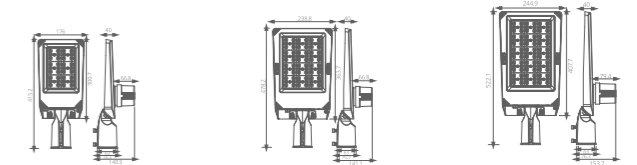

OSRAM 50,000hrs SMD LED LM80 Fixed Ra >70 UGR <19 IP66 5 Years Warranty AC100-200V 50/60Hz CE Die-cast Aluminum Heatsink 30° 45° 60° 90°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	30W	176x415.2x40mm	● 3289lm	● 2532lm	2700K	701812.B.P.C
SMD LED	30W	176x415.2x40mm	● 3900lm	● 3003lm	3000K	701813.B.P.C
SMD LED	30W	176x415.2x40mm	○ 4146lm	○ 3192lm	4000K	701814.B.P.C
SMD LED	30W	176x415.2x40mm	○ 4306lm	○ 3315lm	5000K	701815.B.P.C

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	100W	238.8x478.2x40mm	● 10963lm	● 8441lm	2700K	701822.B.P.C
SMD LED	100W	238.8x478.2x40mm	● 13000lm	● 10010lm	3000K	701823.B.P.C
SMD LED	100W	238.8x478.2x40mm	○ 13819lm	○ 10641lm	4000K	701824.B.P.C
SMD LED	100W	238.8x478.2x40mm	○ 14352lm	○ 11051lm	5000K	701825.B.P.C


Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	150W	244.9x522.1x40mm	● 12662lm	● 16444lm	2700K	701832.B.P.C
SMD LED	150W	244.9x522.1x40mm	● 15015lm	● 19500lm	3000K	701833.B.P.C
SMD LED	150W	244.9x522.1x40mm	○ 15961lm	○ 20729lm	4000K	701834.B.P.C
SMD LED	150W	244.9x522.1x40mm	○ 16577lm	○ 21528lm	5000K	701835.B.P.C

Beam Angle: B(1-30° 2-45° 3-60° 4-90°)

Power Supply: P(1-0n/Off)




Colour Finish: C(1-Black 2-Grey)



7018

Downlight Recessed. Ambience/UGR

**STREET LIGHT** series

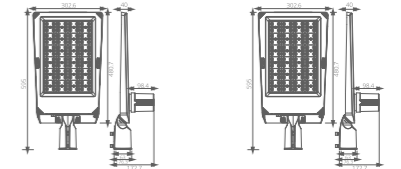

OSRAM 50,000hrs SMD LED LM80 Fixed Ra >70 UGR <19 IP66 5 years Warranty AC100-200V 50/60Hz CE Die-cast Aluminum Heatsink 30° 45° 60° 90°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	200W	302.6x595x40mm	● 21926lm	● 16883m	2700K	701842.B.P.C
SMD LED	200W	302.6x595x40mm	● 26000lm	● 20020lm	3000K	701843.B.P.C
SMD LED	200W	302.6x595x40mm	○ 27638lm	○ 21281lm	4000K	701844.B.P.C
SMD LED	200W	302.6x595x40mm	○ 28704lm	○ 22102lm	5000K	701845.B.P.C


Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	240W	302.6x595x40mm	● 25299lm	● 19480lm	2700K	701852.B.P.C
SMD LED	240W	302.6x595x40mm	● 30000lm	● 23100lm	3000K	701853.B.P.C
SMD LED	240W	302.6x595x40mm	○ 31890lm	○ 24555lm	4000K	701854.B.P.C
SMD LED	240W	302.6x595x40mm	○ 33120lm	○ 25502lm	5000K	701855.B.P.C

Beam Angle: B(1-30°2-45°3-60°4-90°)

Power Supply: P(1-On/Off)




Colour Finish: C(1-Black 2-Grey)




# LED STREET LIGHT - S Series

Lamp on / off / Dim / metering / alarm operation / strategy storage. LoRa gateway coverage radius of 2-5kilometer.


Easy to install. Strong system expansion ability and increase sensor devices. Low power consumption, large capacity , high stability.

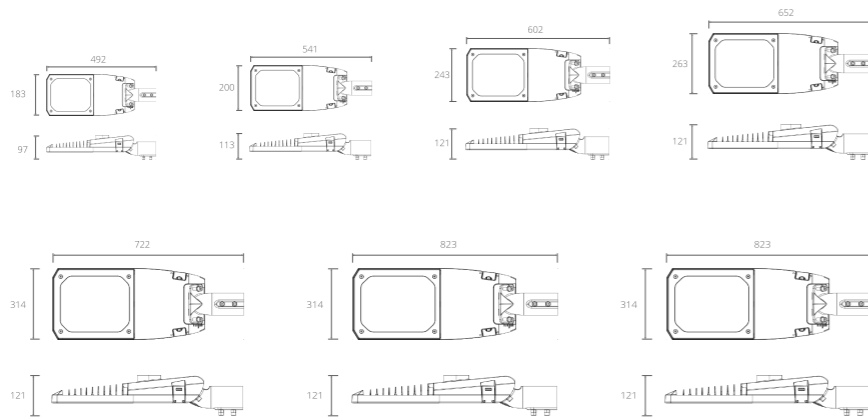


## Multiple light distribution options




For sidewalks, paths and shoulders lighting




For wider sidewalks, ramps, entrance roadways, etc.

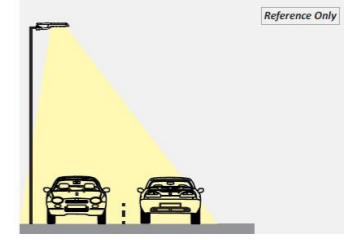

Be applicable to residential areas, highways, bridges, etc.




For roadways, large parking areas and other area lighting




Be applicable to parking lots, center islands, intersections, and large commercial parking lots, etc.


## Light distribution curve selection




120°




113°x97°




TI




T II-M




T III-M



T IV-M



TV




T II-BLS

# 7019

Downlight Recessed. Ambience/UGR

## STREET LIGHT series

# Architectural OUTDOOR

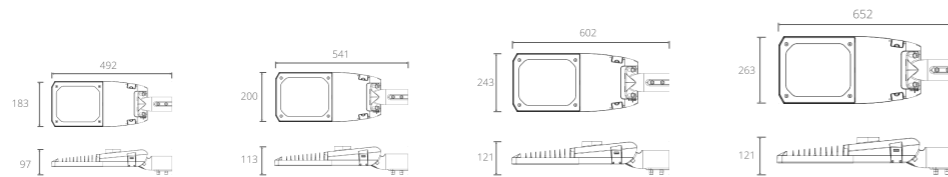

OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >70 | UGR <19 | IP65 | 5 years Warranty | AC100-305V 50/60Hz | CE | Die-cast Aluminum Heatsink | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	40W	492x183x97mm	● 3913lm	● 3013lm	2700K	701912.B.P.C
SMD LED	40W	492x183x97mm	● 4640lm	● 3573lm	3000K	701913.B.P.C
SMD LED	40W	492x183x97mm	○ 4932lm	○ 3798lm	4000K	701914.B.P.C
SMD LED	40W	492x183x97mm	○ 5123lm	○ 3944lm	5000K	701915.B.P.C

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	60W	541x200x113mm	● 5869lm	● 4519lm	2700K	701922.B.P.C
SMD LED	60W	541x200x113mm	● 6960lm	● 5359lm	3000K	701923.B.P.C
SMD LED	60W	541x200x113mm	○ 7398lm	○ 5697lm	4000K	701924.B.P.C
SMD LED	60W	541x200x113mm	○ 7684lm	○ 5917lm	5000K	701925.B.P.C


Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	100W	602x243x121mm	● 9782lm	● 7532lm	2700K	701932.B.P.C
SMD LED	100W	602x243x121mm	● 11600lm	● 8932lm	3000K	701933.B.P.C
SMD LED	100W	602x243x121mm	○ 12331lm	○ 9495lm	4000K	701934.B.P.C
SMD LED	100W	602x243x121mm	○ 12806lm	○ 9861lm	5000K	701935.B.P.C

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	150W	652x263x121mm	● 14673lm	● 11299lm	2700K	701942.B.P.C
SMD LED	150W	652x263x121mm	● 17400lm	● 13398lm	3000K	701943.B.P.C
SMD LED	150W	652x263x121mm	○ 18496lm	○ 14242lm	4000K	701944.B.P.C
SMD LED	150W	652x263x121mm	○ 19210lm	○ 14791lm	5000K	701945.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off)

Colour Finish: C(1 -Black 2 - Grey)




# 7019

Downlight Recessed. Ambience/UGR

## STREET LIGHT series

# Architectural OUTDOOR

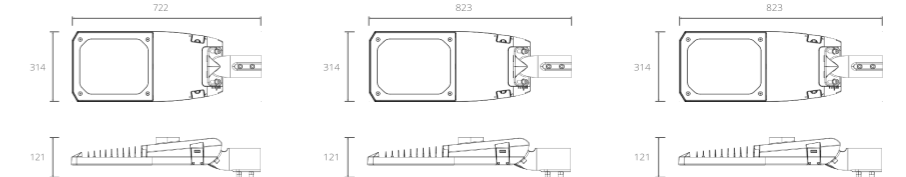

OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >70 | UGR <19 | IP66 | 5 years Warranty | AC100-305V 50/60Hz | CE | Die-cast Aluminum Heatsink | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	200W	722x314x121mm	● 19565lm	● 15065lm	2700K	701952.B.P.C
SMD LED	200W	722x314x121mm	● 23200lm	● 17864lm	3000K	701953.B.P.C
SMD LED	200W	722x314x121mm	○ 24662lm	○ 18989lm	4000K	701954.B.P.C
SMD LED	200W	722x314x121mm	○ 25613lm	○ 19722lm	5000K	701955.B.P.C

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	240W	823x314x121mm	● 23477lm	● 18078lm	2700K	701962.B.P.C
SMD LED	240W	823x314x121mm	● 27840lm	● 21437lm	3000K	701963.B.P.C
SMD LED	240W	823x314x121mm	○ 29594lm	○ 22787lm	4000K	701964.B.P.C
SMD LED	240W	823x314x121mm	○ 30735lm	○ 23666lm	5000K	701965.B.P.C

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	300W	823x314x121mm	● 29347lm	● 22597lm	2700K	701972.B.P.C
SMD LED	300W	823x314x121mm	● 34800lm	● 26796lm	3000K	701973.B.P.C
SMD LED	300W	823x314x121mm	○ 36992lm	○ 28484lm	4000K	701974.B.P.C
SMD LED	300W	823x314x121mm	○ 38419lm	○ 29583lm	5000K	701975.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off)

Colour Finish: C(1 -Black 2 - Grey)




# 7020

Downlight Recessed. Ambience/UGR

## STREET LIGHT series

# Architectural OUTDOOR




OSRAM 50,000hrs | 
 SMD | 
 LED LM80 | 
 Fixed | 
 Ra >90 | 
 UGR <19 | 
 IP55 | 
 5 years Warranty | 
 AC220-240V 50/60Hz | 
 CE | 
 Die-cast Aluminum Heatsink | 
 12° 24° 36° 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	50W	710x3350mm	● 3162lm	● 2435lm	2700K	702012.B.P.C
SMD LED	50W	710x3350mm	● 3750lm	● 2888lm	3000K	702013.B.P.C
SMD LED	50W	710x3350mm	○ 3986lm	○ 3069lm	4000K	702014.B.P.C
SMD LED	50W	710x3350mm	○ 4140lm	○ 3188lm	5000K	702015.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off)

Colour Finish: C(1-Black 2-Grey)




# 7021

Downlight Recessed. Ambience/UGR

## STREET LIGHT series

# Architectural OUTDOOR

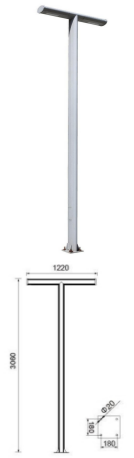

OSRAM 50,000hrs | 
 SMD | 
 LED LM80 | 
 Fixed | 
 Ra >90 | 
 UGR <19 | 
 IP55 | 
 5 years Warranty | 
 AC220-240V 50/60Hz | 
 CE | 
 Die-cast Aluminum Heatsink | 
 12° 24° 36° 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	2x50W	3060x1220mm	● 6325lm	● 4870lm	2700K	702112.B.P.C
SMD LED	2x50W	3060x1220mm	● 7500lm	● 5775lm	3000K	702113.B.P.C
SMD LED	2x50W	3060x1220mm	○ 7973lm	○ 6139lm	4000K	702114.B.P.C
SMD LED	2x50W	3060x1220mm	○ 8280lm	○ 6376lm	5000K	702115.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off)

Colour Finish: C(1-Black 2-Grey)

