



DOWNLIGHT RECESSED IP20



LICHTER 4025
12W
P.1



LICHTER 4026
12W
P.2



LICHTER 4024
12W
P.3



MIKRO 4061
5W/10W/15W
P.4



KOMPAKT 5035
2W
P.5



KOMPAKT 5036
4W
P.6



KOMPAKT 5037
6W
P.7



KOMPAKT 5038
10W
P.8




KOMPAKT 5039
20W
P.9



LINE 5091
5W
P.10



LINE 5092
10W
P.11



LINE 5093
18W
P.12



KLEIN 5081
2W
P.13



KLEIN 5082
4W
P.14



KLEIN 5083
6W
P.15



KLEIN 5084
10W
P.16



PLATIN 4733
10W
P.17



PLATIN 4734
20W
P.18

DOWNLIGHT RECESSED IP65



DURA 4834
7W/12W/20W
P.19



DURA 4836
7W/12W/20W
P.20



DURA 4838
14W/24W/36W
P.21

STAIR LIGHT



STAIR 8048
3W
P.22



STAIR 8049
3W
P.23


4024

Downlight Recessed. Ambience/UGR

LICHTERseries



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	∅110x95mm	1394lm	1067lm	● 2700K	402412.B.P.C
COB LED	12W	∅110x95mm	1488lm	1138lm	● 3000K	402413.B.P.C
COB LED	12W	∅110x95mm	1582lm	1210lm	○ 4000K	402414.B.P.C
COB LED	12W	∅110x95mm	1643lm	1257lm	○ 5000K	402415.B.P.C
COB LED Zigbee Smart	0-12W	∅110x95mm	0-1643lm	0-1257lm	● 2700K - ○ 6500K	402416.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black WW-White/White BB-Black/Black)




4025

Downlight Recessed. Ambience/UGR

LICHTERseries



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	88x88x100mm	1394lm	941lm	● 2700K	402512.B.P.C
COB LED	12W	88x88x100mm	1488lm	1004lm	● 3000K	402513.B.P.C
COB LED	12W	88x88x100mm	1582lm	1068lm	○ 4000K	402514.B.P.C
COB LED	12W	88x88x100mm	1643lm	1109lm	○ 5000K	402515.B.P.C
COB LED Zigbee Smart	0-12W	88x88x100mm	0-1643lm	0-1109lm	● 2700K - ○ 6500K	402516.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White BB-Black/Black WW-White/White BB-Black/Black)




4026

Downlight Recessed. Ambience/UGR

LICHTERseries



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	12W	∅110x95mm	1394lm	954lm	● 2700K	402612.B.P.C
COB LED	12W	∅110x95mm	1488lm	1018lm	● 3000K	402613.B.P.C
COB LED	12W	∅110x95mm	1582lm	1082lm	○ 4000K	402614.B.P.C
COB LED	12W	∅110x95mm	1643lm	1124lm	○ 5000K	402615.B.P.C
COB LED Zigbee Smart	0-12W	∅110x95mm	0-1643lm	0-1124lm	● 2700K - ○ 6500K	402616.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black WS-White/Silver WG-Black/Golden)




4061

Downlight Recessed. Ambience/UGR

MIKROseries



Architectural INDOOR

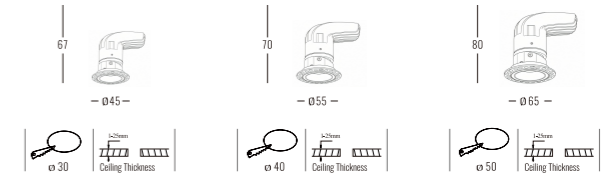

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	∅45x67mm	581lm	421lm	● 2700K	406112.B.P.C
COB LED	5W	∅45x67mm	620lm	449lm	● 3000K	406113.B.P.C
COB LED	5W	∅45x67mm	659lm	477lm	○ 4000K	406114.B.P.C
COB LED	5W	∅45x67mm	684lm	495lm	○ 5000K	406115.B.P.C
COB LED	10W	∅55x70mm	1068lm	836lm	● 2700K	406122.B.P.C
COB LED	10W	∅55x70mm	1140lm	893lm	● 3000K	406123.B.P.C
COB LED	10W	∅55x70mm	1212lm	949lm	○ 4000K	406124.B.P.C
COB LED	10W	∅55x70mm	1259lm	985lm	○ 5000K	406125.B.P.C
COB LED	15W	∅65x80mm	1743lm	1274lm	● 2700K	406132.B.P.C
COB LED	15W	∅65x80mm	1860lm	1359lm	● 3000K	406133.B.P.C
COB LED	15W	∅65x80mm	1977lm	1445lm	○ 4000K	406134.B.P.C
COB LED	15W	∅65x80mm	2053lm	1501lm	○ 5000K	406135.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-50°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB--White/Black)





5035

Downlight Recessed. Ambience/UGR

KOMPAKT series



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2W	45x76x43mm	201lm	125lm	● 2700K	503512.B.P.C
COB LED	2W	45x76x43mm	214lm	134lm	● 3000K	503513.B.P.C
COB LED	2W	45x76x43mm	227lm	143lm	○ 4000K	503514.B.P.C
COB LED	2W	45x76x43mm	236lm	147lm	○ 5000K	503515.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)




5036

Downlight Recessed. Ambience/UGR

KOMPAKT series



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	4W	76x76x43mm	401lm	250lm	● 2700K	503612.B.P.C
COB LED	4W	76x76x43mm	428lm	269lm	● 3000K	503613.B.P.C
COB LED	4W	76x76x43mm	455lm	286lm	○ 4000K	503614.B.P.C
COB LED	4W	76x76x43mm	473lm	294lm	○ 5000K	503615.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)




5037

Downlight Recessed. Ambience/UGR

KOMPAKT series



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	6W	105x76x42mm	602lm	374lm	● 2700K	503712.B.P.C
COB LED	6W	105x76x42mm	642lm	403lm	● 3000K	503713.B.P.C
COB LED	6W	105x76x42mm	682lm	428lm	○ 4000K	503714.B.P.C
COB LED	6W	105x76x42mm	709lm	441lm	○ 5000K	503715.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)





5038

Downlight Recessed. Ambience/UGR

KOMPAKT series



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	165x76x42mm	1003lm	749lm	● 2700K	503812.B.P.C
COB LED	10W	165x76x42mm	1070lm	806lm	● 3000K	503813.B.P.C
COB LED	10W	165x76x42mm	1137lm	857lm	○ 4000K	503814.B.P.C
COB LED	10W	165x76x42mm	1181lm	882lm	○ 5000K	503815.B.P.C
COB LED Zigbee Smart	0-10W	165x76x42mm	0-1181lm	0-882lm	● 2700K - ○ 6500K	503816.B.5.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)




5039

Downlight Recessed. Ambience/UGR

KOMPAKT series



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	20W	315x76x42mm	2005lm	1498lm	● 2700K	503912.B.P.C
COB LED	20W	315x76x42mm	2140lm	1612lm	● 3000K	503913.B.P.C
COB LED	20W	315x76x42mm	2275lm	1714lm	○ 4000K	503914.B.P.C
COB LED	20W	315x76x42mm	2363lm	1765lm	○ 5000K	503915.B.P.C
COB LED Zigbee Smart	0-20W	315x76x42mm	0-2363lm	0-1765lm	● 2700K--○ 6500K	503916.B.5.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)




5091

Downlight Recessed. Ambience/UGR

LINIE series



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	5W	70x67x55mm	501lm	314lm	● 2700K	509112.B.P.C
COB LED	5W	70x67x55mm	535lm	335lm	● 3000K	509113.B.P.C
COB LED	5W	70x67x55mm	569lm	356lm	○ 4000K	509114.B.P.C
COB LED	5W	70x67x55mm	591lm	370lm	○ 5000K	509115.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)




5092

Downlight Recessed. Ambience/UGR

LINIEseries



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	130x67x55mm	1003lm	785lm	● 2700K	509212.B.P.C
COB LED	10W	130x67x55mm	1070lm	838lm	● 3000K	509213.B.P.C
COB LED	10W	130x67x55mm	1137lm	891lm	○ 4000K	509214.B.P.C
COB LED	10W	130x67x55mm	1181lm	925lm	○ 5000K	509215.B.P.C
COB LED Zigbee Smart	0-10W	130x67x55mm	0-1181lm	0-925lm	● 2700K - ○ 6500K	509216.B.5.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)




5093

Downlight Recessed. Ambience/UGR

LINIEseries



Architectural INDOOR




Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	18W	250x67x55mm	1805lm	1413lm	● 2700K	509312.B.P.C
COB LED	18W	250x67x55mm	1926lm	1508lm	● 3000K	509313.B.P.C
COB LED	18W	250x67x55mm	2047lm	1603lm	○ 4000K	509314.B.P.C
COB LED	18W	250x67x55mm	2126lm	1665lm	○ 5000K	509315.B.P.C
COB LED Zigbee Smart	0-18W	250x67x55mm	0-2126lm	0-1665lm	● 2700K - ○ 6500K	509316.B.5.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WB-White/Black)




5081

Downlight Recessed. Ambience/UGR

KLEINseries



Architectural INDOOR



OSRAM 50,000hrs | LED LM80 | Adj. | Ra >90 | UGR <19 | IP20 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 30°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2W	75x47x52mm	201lm	131lm	● 2700K	508112.B.P.C
COB LED	2W	75x47x52mm	214lm	140lm	● 3000K	508113.B.P.C
COB LED	2W	75x47x52mm	227lm	148lm	○ 4000K	508114.B.P.C
COB LED	2W	75x47x52mm	236lm	154lm	○ 5000K	508115.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)



White/Black


5082

Downlight Recessed. Ambience/UGR

KLEINseries



Architectural INDOOR



OSRAM 50,000hrs | LED LM80 | Adj. | Ra >90 | UGR <19 | IP20 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 30°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	4W	76x76x52mm	401lm	262lm	● 2700K	508212.B.P.C
COB LED	4W	76x76x52mm	428lm	279lm	● 3000K	508213.B.P.C
COB LED	4W	76x76x52mm	455lm	297lm	○ 4000K	508214.B.P.C
COB LED	4W	76x76x52mm	473lm	308lm	○ 5000K	508215.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)



White/Black


5083

Downlight Recessed. Ambience/UGR

KLEINseries



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	6W	105x76x53mm	602lm	393lm	● 2700K	508312.B.P.C
COB LED	6W	105x76x53mm	642lm	419lm	● 3000K	508313.B.P.C
COB LED	6W	105x76x53mm	682lm	445lm	● 4000K	508314.B.P.C
COB LED	6W	105x76x53mm	709lm	462lm	● 5000K	508315.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)




5084

Downlight Recessed. Ambience/UGR

KLEINseries



Architectural INDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	165x77x52mm	1003lm	785lm	● 2700K	508412.B.P.C
COB LED	10W	165x77x52mm	1070lm	838lm	● 3000K	508413.B.P.C
COB LED	10W	165x77x52mm	1137lm	891lm	● 4000K	508414.B.P.C
COB LED	10W	165x77x52mm	1181lm	925lm	● 5000K	508415.B.P.C

Beam Angle: B(1-30°)

Power Supply: P(1-On/Off)

Colour Finish: C(WB-White/Black)



4733

Downlight Recessed. Ambience/UGR

PLATINseries



ArchitecturalINDOOR





4734

Downlight Recessed. Ambience/UGR

PLATINseries



ArchitecturalINDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	10W	237x37x55mm	1499lm	1174lm	● 2700K	473312.B.P.C
COB LED	10W	237x37x55mm	1600lm	1253lm	● 3000K	473313.B.P.C
COB LED	10W	237x37x55mm	1701lm	1332lm	● 4000K	473314.B.P.C
COB LED	10W	237x37x55mm	1766lm	1383lm	● 5000K	473315.B.P.C

Beam Angle: B(1-15°2-24°3-38°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim 5-Zigbee Smart)

Colour Finish: C(WW-White/WhiteWB-White/Black)



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	20W	237x37x55mm	2998lm	2113lm	● 2700K	473412.B.P.C
COB LED	20W	237x37x55mm	3200lm	2255lm	● 3000K	473413.B.P.C
COB LED	20W	237x37x55mm	3402lm	2397lm	● 4000K	473414.B.P.C
COB LED	20W	237x37x55mm	3533lm	2490lm	● 5000K	473415.B.P.C

Beam Angle: B(1-15°2-24°3-38°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim 5-Zigbee Smart)

Colour Finish: C(WW-White/WhiteWB-White/Black)



4834


Downlight Recessed. Ambience/UGR

DURAseries

IP65



Architectural INDOOR

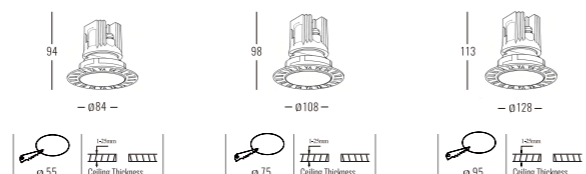

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	7W	ø84x94mm	813lm	582lm	● 2700K	483412.B.P.C
COB LED	7W	ø84x94mm	868lm	621lm	● 3000K	483413.B.P.C
COB LED	7W	ø84x94mm	923lm	661lm	● 4000K	483414.B.P.C
COB LED	7W	ø84x94mm	958lm	686lm	● 5000K	483415.B.P.C
COB LED	12W	ø108x98mm	1394lm	1092lm	● 2700K	483422.B.P.C
COB LED	12W	ø108x98mm	1488lm	1165lm	● 3000K	483423.B.P.C
COB LED	12W	ø108x98mm	1582lm	1239lm	● 4000K	483424.B.P.C
COB LED	12W	ø108x98mm	1643lm	1286lm	● 5000K	483425.B.P.C
COB LED Zigbee Smart	0-12W	ø108x98mm	0-1643lm	0-1286lm	● 2700K--○ 6500K	483426.B.5.C
COB LED	20W	ø128x113mm	2324lm	1638lm	● 2700K	483432.B.P.C
COB LED	20W	ø128x113mm	2480lm	1748lm	● 3000K	483433.B.P.C
COB LED	20W	ø128x113mm	2636lm	1858lm	● 4000K	483434.B.P.C
COB LED	20W	ø128x113mm	2738lm	1929lm	● 5000K	483435.B.P.C
COB LED Zigbee Smart	0-20W	ø128x113mm	0-2738lm	0-1929lm	● 2700K--○ 6500K	483436.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-55°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black WMS-White/Mat Silver WS-White/Silver WRG-White/Rose Gold WCB-White/Chrome Black)



4836


Downlight Recessed. Ambience/UGR

DURAseries

IP65



Architectural INDOOR

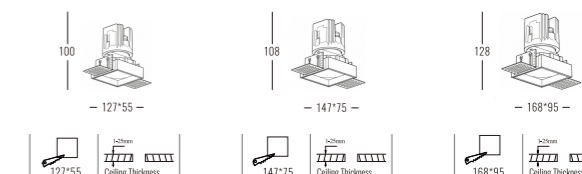

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	7W	127x55x100mm	813lm	582lm	● 2700K	483612.B.P.C
COB LED	7W	127x55x100mm	868lm	621lm	● 3000K	483613.B.P.C
COB LED	7W	127x55x100mm	923lm	661lm	● 4000K	483614.B.P.C
COB LED	7W	127x55x100mm	958lm	686lm	● 5000K	483615.B.P.C
COB LED	12W	147x75x108mm	1394lm	1092lm	● 2700K	483622.B.P.C
COB LED	12W	147x75x108mm	1488lm	1165lm	● 3000K	483623.B.P.C
COB LED	12W	147x75x108mm	1582lm	1239lm	● 4000K	483624.B.P.C
COB LED	12W	147x75x108mm	1643lm	1286lm	● 5000K	483625.B.P.C
COB LED	20W	168x95x128mm	2324lm	1638lm	● 2700K	483632.B.P.C
COB LED	20W	168x95x128mm	2480lm	1748lm	● 3000K	483633.B.P.C
COB LED	20W	168x95x128mm	2636lm	1858lm	● 4000K	483634.B.P.C
COB LED	20W	168x95x128mm	2738lm	1929lm	● 5000K	483635.B.P.C

Beam Angle: B(1-15° 2-24° 3-36° 4-55°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim 5-Zigbee Smart)

Colour Finish: C(WW-White/White WB-White/Black WMS-White/Mat Silver WS-White/Silver WRG-White/Rose Gold WCB-White/Chrome Black)



4838


Downlight Recessed. Ambience/UGR

DURAseries

IP65



Architectural INDOOR

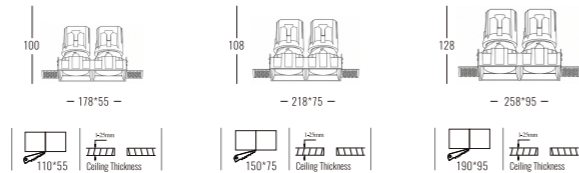

OSRAM 50,000hrs | LED LM80 | Fixed | Ra >90 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminium Heatsink | 15° 24° 36° 55°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	14W	178x55x100mm	1627lm	1164lm	● 2700K	483812.B.P.C
COB LED	14W	178x55x100mm	1736lm	1243lm	● 3000K	483813.B.P.C
COB LED	14W	178x55x100mm	1845lm	1321lm	○ 4000K	483814.B.P.C
COB LED	14W	178x55x100mm	1917lm	1372lm	○ 5000K	483815.B.P.C
COB LED	24W	218x75x108mm	2789lm	2183lm	● 2700K	483822.B.P.C
COB LED	24W	218x75x108mm	2976lm	2330lm	● 3000K	483823.B.P.C
COB LED	24W	218x75x108mm	3163lm	2477lm	○ 4000K	483824.B.P.C
COB LED	24W	218x75x108mm	3286lm	2573lm	○ 5000K	483825.B.P.C
COB LED Zigbee Smart	0-24W	218x75x108mm	0-3286lm	0-2573lm	● 2700K--○ 6500K	483826.B.5.C
COB LED	36W	258x95x128mm	4183lm	3093lm	● 2700K	443832.B.P.C
COB LED	36W	258x95x128mm	4464lm	3301lm	● 3000K	443833.B.P.C
COB LED	36W	258x95x128mm	4745lm	3509lm	○ 4000K	443834.B.P.C
COB LED	36W	258x95x128mm	4928lm	3644lm	○ 5000K	443835.B.P.C
COB LED Zigbee Smart	0-36W	258x95x128mm	0-4928lm	0-3644lm	● 2700K--○ 6500K	443836.B.5.C

Beam Angle: B(1-15° 2-24° 3-36° 4-55°)

Power Supply: P(1-On/Off 2-Phase Dim 3-DALI Dim 4-0-10V Dim)

Colour Finish: C(WW-White/White WB-White/Black WMS-White/Mat Silver WS-White/Silver WRG-White/Rose Gold WCB-White/Chrome Black)




8048

Downlight Recessed. Ambience/UGR

STAIRseries



Architectural INDOOR

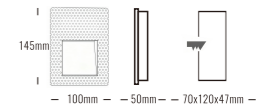

OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >80 | UGR <19 | IP20 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminium Heatsink | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	145x100x50mm	295lm	227lm	● 2700K	803012.B.P.C
SMD LED	3W	145x100x50mm	315lm	243lm	● 3000K	803013.B.P.C
SMD LED	3W	145x100x50mm	335lm	258lm	○ 4000K	803014.B.P.C
SMD LED	3W	145x100x50mm	348lm	268lm	○ 5000K	803015.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)




8049

Downlight Recessed. Ambience/UGR

STAIRseries



Architectural INDOOR



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra > 80	UGR < 19	IP20	5 years Warranty	AC220-240V 50/60Hz	CE	Die-cast Aluminium Heatsink	60°
---------------------------	-----	-------------	-------	------------	-------------	------	---------------------	-----------------------	----	--------------------------------	-----

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	200x100x50mm	295lm	205lm	● 2700K	804912.B.P.C
SMD LED	3W	200x100x50mm	315lm	223lm	● 3000K	804913.B.P.C
SMD LED	3W	200x100x50mm	335lm	237lm	○ 4000K	804914.B.P.C
SMD LED	3W	200x100x50mm	348lm	246lm	○ 5000K	804915.B.P.C

Beam Angle: B(1-60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



White