

TRI PROOF



TRI-PROOF 6086
20W/40W/50W
P.1



TRI-PROOF 6087
18W/36W/50W/60W
P.2



TRI-PROOF 6088
40W/80W/120W
P.4



TRI-PROOF 6089
20W/40W/60W
P.5



TRI-PROOF 6090
20W/40W/60W
P.6



TRI-PROOF 6091
20W/40W/50W/60W
P.8



TRI-PROOF 6092
20W/40W/50W/60W
P.10



TRI-PROOF 6093
20W/40W/50W/60W
P.11



TRI-PROOF 6094
20W/40W/50W/60W
P.12



TRI-PROOF 6095
20W/40W/50W/60W
P.13



TRI-PROOF 6096
18W/36W/40W
P.14

6086

Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP65

Architectural OUTDOOR



| | | | | | | | | | | | |
|--------------------|-----|-------------|-------|-----------|------------|------|---------------------|-----------------------|----|-------|------|
| OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >90 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | PC+PC | 120° |
|--------------------|-----|-------------|-------|-----------|------------|------|---------------------|-----------------------|----|-------|------|

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|--------------|---------------|---------------|---------|--------------|
| SMD LED | 20W | 600x95x80mm | 2446lm | 1883lm | ● 2700K | 608612.B.P.C |
| SMD LED | 20W | 600x95x80mm | 2610lm | 2010lm | ● 3000K | 608613.B.P.C |
| SMD LED | 20W | 600x95x80mm | 2774lm | 2136lm | ○ 4000K | 608614.B.P.C |
| SMD LED | 20W | 600x95x80mm | 2881lm | 2219lm | ○ 5000K | 608615.B.P.C |
| SMD LED | 40W | 1200x95x80mm | 4891lm | 3766lm | ● 2700K | 608622.B.P.C |
| SMD LED | 40W | 1200x95x80mm | 5220lm | 4019lm | ● 3000K | 608623.B.P.C |
| SMD LED | 40W | 1200x95x80mm | 5549lm | 4273lm | ○ 4000K | 608624.B.P.C |
| SMD LED | 40W | 1200x95x80mm | 5763lm | 4473lm | ○ 5000K | 608625.B.P.C |
| SMD LED | 50W | 1500x95x80mm | 6114lm | 4708lm | ● 2700K | 608632.B.P.C |
| SMD LED | 50W | 1500x95x80mm | 6525lm | 5024lm | ● 3000K | 608633.B.P.C |
| SMD LED | 50W | 1500x95x80mm | 6936lm | 5341lm | ○ 4000K | 608634.B.P.C |
| SMD LED | 50W | 1500x95x80mm | 7204lm | 5547lm | ○ 5000K | 608635.B.P.C |

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



White


6087

Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP65

Architectural OUTDOOR



| | | | | | | | | | | | |
|--------------------|-----|-------------|-------|-----------|------------|------|---------------------|-----------------------|----|-------------------------|------|
| OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >90 | UGR <19 | IP65 | 5 years Warranty | AC100-240V 50/60Hz | CE | Metal-Tempered Glass | 120° |
|--------------------|-----|-------------|-------|-----------|------------|------|---------------------|-----------------------|----|-------------------------|------|

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|---------------|---------------|---------------|---------|--------------|
| SMD LED | 18W | 750x140x90mm | 2125lm | 1636lm | ● 2700K | 608712.B.P.C |
| SMD LED | 18W | 750x140x90mm | 2268lm | 1746lm | ● 3000K | 608713.B.P.C |
| SMD LED | 18W | 750x140x90mm | 2411lm | 1856lm | ○ 4000K | 608714.B.P.C |
| SMD LED | 18W | 750x140x90mm | 2504lm | 1928lm | ○ 5000K | 608715.B.P.C |
| SMD LED | 36W | 1350x140x90mm | 4250lm | 3273lm | ● 2700K | 608722.B.P.C |
| SMD LED | 36W | 1350x140x90mm | 4536lm | 3493lm | ● 3000K | 608723.B.P.C |
| SMD LED | 36W | 1350x140x90mm | 4822lm | 3713lm | ○ 4000K | 608724.B.P.C |
| SMD LED | 36W | 1350x140x90mm | 5008lm | 3856lm | ○ 5000K | 608725.B.P.C |
| SMD LED | 50W | 1650x140x90mm | 5903lm | 4545lm | ● 2700K | 608732.B.P.C |
| SMD LED | 50W | 1650x140x90mm | 6300lm | 4851lm | ● 3000K | 608733.B.P.C |
| SMD LED | 50W | 1650x140x90mm | 6697lm | 5157lm | ○ 4000K | 608734.B.P.C |
| SMD LED | 50W | 1650x140x90mm | 6955lm | 5356lm | ○ 5000K | 608735.B.P.C |
| SMD LED | 60W | 1650x140x90mm | 7084lm | 5454lm | ● 2700K | 608742.B.P.C |
| SMD LED | 60W | 1650x140x90mm | 7560lm | 5821lm | ● 3000K | 608743.B.P.C |
| SMD LED | 60W | 1650x140x90mm | 8036lm | 6188lm | ○ 4000K | 608744.B.P.C |
| SMD LED | 60W | 1650x140x90mm | 8346lm | 6427lm | ○ 5000K | 608745.B.P.C |

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)




White

6088

Downlight Recessed. Ambience/UGR

TRI-PROOF series


IP65

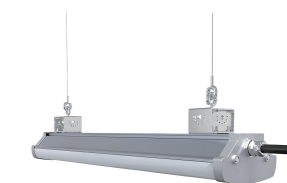

TRI PROOF LIGHT

Customizable high power output, and an adjustable lamp angle, making it suitable for warehouses, factories, logistics centers, subways, and other similar environments.

Is a robust and high-performance tri-proof luminaire designed for industrial and commercial applications. It features an aluminum heat sink.

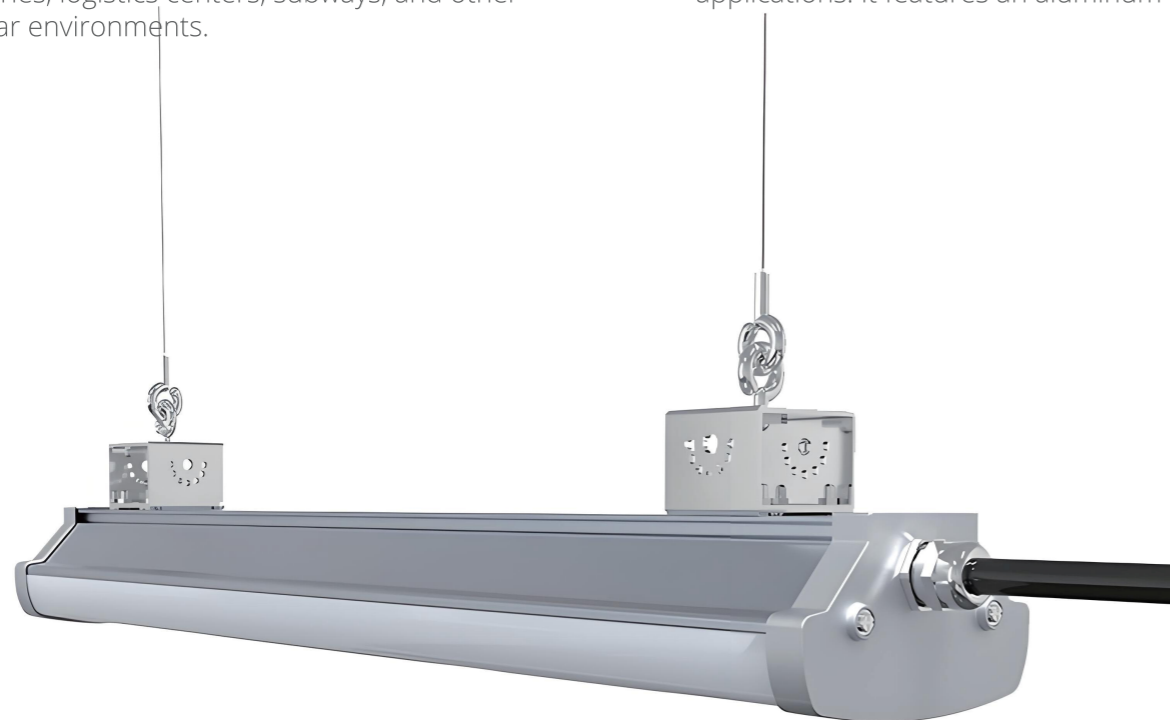

OSRAM 50,000hrs SMD LED LM80 Fixed Ra >90 UGR <19 IP65 5 years Warranty AC100-240V 50/60Hz CE Aluminum+PC 120°

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|---------------|---------------|---------------|---------|--------------|
| SMD LED | 40W | 600x117x69mm | 4824lm | 3714lm | ● 2700K | 608812.B.P.C |
| SMD LED | 40W | 600x117x69mm | 5148lm | 3964lm | ● 3000K | 608813.B.P.C |
| SMD LED | 40W | 600x117x69mm | 5472lm | 4214lm | ● 4000K | 608814.B.P.C |
| SMD LED | 40W | 600x117x69mm | 5683lm | 4376lm | ● 5000K | 608815.B.P.C |
| SMD LED | 80W | 1000x117x69mm | 9445lm | 7273lm | ● 2700K | 608822.B.P.C |
| SMD LED | 80W | 1000x117x69mm | 10080lm | 7762lm | ● 3000K | 608823.B.P.C |
| SMD LED | 80W | 1000x117x69mm | 10715lm | 8251lm | ● 4000K | 608824.B.P.C |
| SMD LED | 80W | 1000x117x69mm | 11128lm | 8569lm | ● 5000K | 608825.B.P.C |
| SMD LED | 120W | 1200x117x69mm | 14167lm | 10909lm | ● 2700K | 608832.B.P.C |
| SMD LED | 120W | 1200x117x69mm | 15120lm | 11642lm | ● 3000K | 608833.B.P.C |
| SMD LED | 120W | 1200x117x69mm | 16073lm | 12376lm | ● 4000K | 608834.B.P.C |
| SMD LED | 120W | 1200x117x69mm | 16692lm | 12853lm | ● 5000K | 608835.B.P.C |

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



6089


Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP65



Architectural OUTDOOR



6090


Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP65



Architectural OUTDOOR



| | | | | | | | | | | | |
|--------------------|-----|-------------|-------|-----------|------------|------|---------------------|-----------------------|----|-------------|------|
| OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >90 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | Aluminum+PC | 120° |
|--------------------|-----|-------------|-------|-----------|------------|------|---------------------|-----------------------|----|-------------|------|

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|--------------|---------------|---------------|---------|--------------|
| SMD LED | 20W | 600x85x56mm | 2193lm | 1688lm | ● 2700K | 608912.B.P.C |
| SMD LED | 20W | 600x85x56mm | 2340lm | 1802lm | ● 3000K | 608913.B.P.C |
| SMD LED | 20W | 600x85x56mm | 2487lm | 1915lm | ○ 4000K | 608914.B.P.C |
| SMD LED | 20W | 600x85x56mm | 2583lm | 1989lm | ○ 5000K | 608915.B.P.C |
| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
| SMD LED | 40W | 1200x85x56mm | 4385lm | 3377lm | ● 2700K | 608922.B.P.C |
| SMD LED | 40W | 1200x85x56mm | 4680lm | 3604lm | ● 3000K | 608923.B.P.C |
| SMD LED | 40W | 1200x85x56mm | 4975lm | 3831lm | ○ 4000K | 608924.B.P.C |
| SMD LED | 40W | 1200x85x56mm | 5167lm | 3978lm | ○ 5000K | 608925.B.P.C |
| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
| SMD LED | 60W | 1500x85x56mm | 6578lm | 5065lm | ● 2700K | 608932.B.P.C |
| SMD LED | 60W | 1500x85x56mm | 7020lm | 5405lm | ● 3000K | 608933.B.P.C |
| SMD LED | 60W | 1500x85x56mm | 7462lm | 5746lm | ○ 4000K | 608934.B.P.C |
| SMD LED | 60W | 1500x85x56mm | 7750lm | 5968lm | ○ 5000K | 608935.B.P.C |

Beam Angle: B(1-120°)

Power Supply: P(1-0n/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



White

| | | | | | | | | | | | |
|--------------------|-----|-------------|-------|-----------|------------|------|---------------------|-----------------------|----|-------|------|
| OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >90 | UGR <19 | IP65 | 5 years Warranty | AC100-240V 50/60Hz | CE | PC+PC | 120° |
|--------------------|-----|-------------|-------|-----------|------------|------|---------------------|-----------------------|----|-------|------|

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|--------------|---------------|---------------|---------|--------------|
| SMD LED | 20W | 600x84x69mm | 2328lm | 1792lm | ● 2700K | 609012.B.P.C |
| SMD LED | 20W | 600x84x69mm | 2484lm | 1913lm | ● 3000K | 609013.B.P.C |
| SMD LED | 20W | 600x84x69mm | 2640lm | 2033lm | ○ 4000K | 609014.B.P.C |
| SMD LED | 20W | 600x84x69mm | 2742lm | 2112lm | ○ 5000K | 609015.B.P.C |
| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
| SMD LED | 40W | 1200x84x69mm | 4655lm | 3584lm | ● 2700K | 609022.B.P.C |
| SMD LED | 40W | 1200x84x69mm | 4968lm | 3825lm | ● 3000K | 609023.B.P.C |
| SMD LED | 40W | 1200x84x69mm | 5281lm | 4066lm | ○ 4000K | 609024.B.P.C |
| SMD LED | 40W | 1200x84x69mm | 5485lm | 4223lm | ○ 5000K | 609025.B.P.C |
| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
| SMD LED | 60W | 1500x84x69mm | 6983lm | 5377lm | ● 2700K | 609032.B.P.C |
| SMD LED | 60W | 1500x84x69mm | 7452lm | 5738lm | ● 3000K | 609033.B.P.C |
| SMD LED | 60W | 1500x84x69mm | 7921lm | 6100lm | ○ 4000K | 609034.B.P.C |
| SMD LED | 60W | 1500x84x69mm | 8227lm | 6335lm | ○ 5000K | 609035.B.P.C |

Beam Angle: B(1-120°)

Power Supply: P(1-0n/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)




White

6091

Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP67

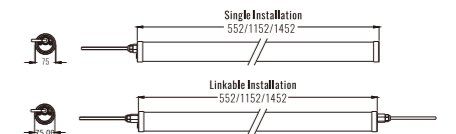

IP69K LED TRI PROOF LIGHT BROCHURE

POCHE


OSRAM 50,000hrs SMD LED LM80 Fixed Ra >90 UGR <19 IP67 5 years Warranty AC100-277V 50/60Hz CE Stainless Steel+Glass +High Borosilicate 120°

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|-------------|---------------|---------------|---------|--------------|
| SMD LED | 20W | ∅75x552mm | 2108lm | 1623lm | ● 2700K | 609112.B.P.C |
| SMD LED | 20W | ∅75x552mm | 2250lm | 1733lm | ● 3000K | 609113.B.P.C |
| SMD LED | 20W | ∅75x552mm | 2392lm | 1842lm | ○ 4000K | 609114.B.P.C |
| SMD LED | 20W | ∅75x552mm | 2484lm | 1913lm | ○ 5000K | 609115.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 4217lm | 3247lm | ● 2700K | 609122.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 4500lm | 3465lm | ● 3000K | 609123.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 4784lm | 3683lm | ○ 4000K | 609124.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 4968lm | 3825lm | ○ 5000K | 609125.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 5271lm | 4058lm | ● 2700K | 609132.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 5625lm | 4331lm | ● 3000K | 609133.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 5979lm | 4604lm | ○ 4000K | 609134.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 6210lm | 4782lm | ○ 5000K | 609135.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 6325lm | 4870lm | ● 2700K | 609142.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 6750lm | 5198lm | ● 3000K | 609143.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 7175lm | 5525lm | ○ 4000K | 609144.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 7452lm | 5738lm | ○ 5000K | 609145.B.P.C |

Beam Angle: B(1-120°)

Power Supply: P(1-0n/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)





6092

Downlight Recessed. Ambience/UGR

TRI-PROOF series


IP67

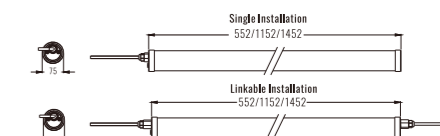

ADJUSTABLE 80° - 120° TRI PROOF LIGHT TF SERIES -Grid type

- IP67 & IP69K
- PMMA IK08 / PC IK10
- Against water pressure of 100bar (1450psi) and temperature of 80°C
- System efficiency up to 60Lm/W
- High CRI>80
- Environmentally friendly, no mercury, no UV, no IR

- Environmentally friendly, no mercury, no UV, no IR
- Wide beam angle 80*120°
- Quick start instant 100% luminous flux
- 5 years warranty
- Certificate: CE, RoHS certified
- Surface mount or suspended


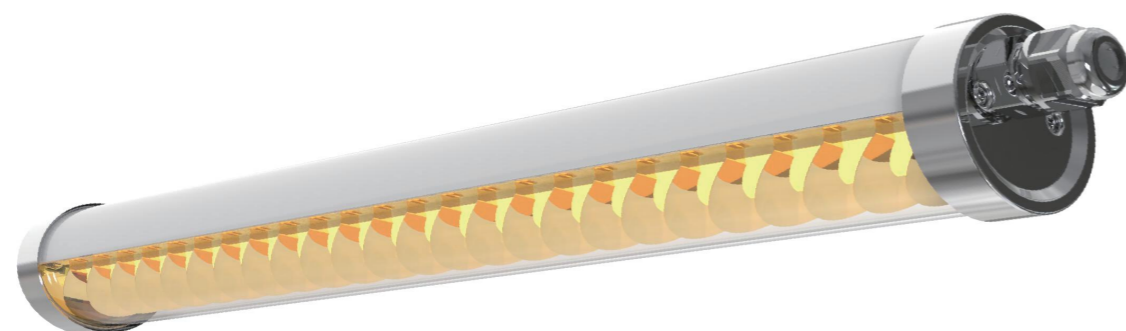


| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|-------------|---------------|---------------|---------|--------------|
| SMD LED | 20W | ∅75x552mm | 1434lm | 1104lm | ● 2700K | 609212.B.P.C |
| SMD LED | 20W | ∅75x552mm | 1530lm | 1178lm | ● 3000K | 609213.B.P.C |
| SMD LED | 20W | ∅75x552mm | 1626lm | 1252lm | ● 4000K | 609214.B.P.C |
| SMD LED | 20W | ∅75x552mm | 1689lm | 1301lm | ● 5000K | 609215.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 2867lm | 2208lm | ● 2700K | 609222.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 3060lm | 2356lm | ● 3000K | 609223.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 3253lm | 2505lm | ● 4000K | 609224.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 3378lm | 2601lm | ● 5000K | 609225.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 3584lm | 2760lm | ● 2700K | 609232.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 3825lm | 2945lm | ● 3000K | 609233.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 4066lm | 3131lm | ● 4000K | 609234.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 4223lm | 3252lm | ● 5000K | 609235.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 4301lm | 3312lm | ● 2700K | 609242.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 4590lm | 3534lm | ● 3000K | 609243.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 4879lm | 3757lm | ● 4000K | 609244.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 5067lm | 3902lm | ● 5000K | 609245.B.P.C |

Beam Angle: B(1-80X120°)

Power Supply: P(1-0n/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



6093


Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP67



Architectural OUTDOOR

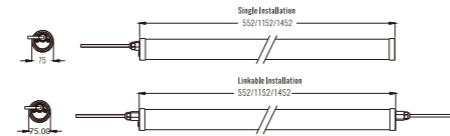


OSRAM 50,000hrs SMD LED LM80 Fixed Ra >90 UGR <16 IP67 5 years Warranty AC100-277V 50/60Hz CE Stainless Steel+PC 120°

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|-------------|---------------|---------------|---------|--------------|
| SMD LED | 20W | ∅75x552mm | 2361lm | 1818lm | ● 2700K | 609312.B.P.C |
| SMD LED | 20W | ∅75x552mm | 2520lm | 1940lm | ● 3000K | 609313.B.P.C |
| SMD LED | 20W | ∅75x552mm | 2679lm | 2063lm | ○ 4000K | 609314.B.P.C |
| SMD LED | 20W | ∅75x552mm | 2782lm | 2142lm | ○ 5000K | 609315.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 4722lm | 3636lm | ● 2700K | 609322.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 5040lm | 3881lm | ● 3000K | 609323.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 5358lm | 4125lm | ○ 4000K | 609324.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 5564lm | 4284lm | ○ 5000K | 609325.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 5903lm | 4545lm | ● 2700K | 609332.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 6300lm | 4851lm | ● 3000K | 609333.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 6697lm | 5157lm | ○ 4000K | 609334.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 6955lm | 5356lm | ○ 5000K | 609335.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 7084lm | 5454lm | ● 2700K | 609342.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 7560lm | 5821lm | ● 3000K | 609343.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 8036lm | 6188lm | ○ 4000K | 609344.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 8346lm | 6427lm | ○ 5000K | 609345.B.P.C |

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



6094


Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP67



Architectural OUTDOOR

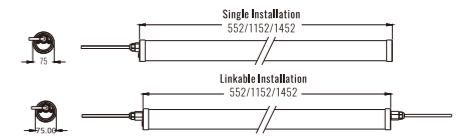


OSRAM 50,000hrs SMD LED LM80 Fixed Ra >90 UGR <19 IP67 5 years Warranty AC100-277V 50/60Hz CE Stainless Steel+PC 120°

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|-------------|---------------|---------------|---------|--------------|
| SMD LED | 20W | ∅75x552mm | 2530lm | 1948lm | ● 2700K | 609412.B.P.C |
| SMD LED | 20W | ∅75x552mm | 2700lm | 2079lm | ● 3000K | 609413.B.P.C |
| SMD LED | 20W | ∅75x552mm | 2870lm | 2210lm | ○ 4000K | 609414.B.P.C |
| SMD LED | 20W | ∅75x552mm | 2981lm | 2295lm | ○ 5000K | 609415.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 4891lm | 3766lm | ● 2700K | 609422.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 5220lm | 4019lm | ● 3000K | 609423.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 5549lm | 4273lm | ○ 4000K | 609424.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 5763lm | 4437lm | ○ 5000K | 609425.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 6114lm | 4708lm | ● 2700K | 609432.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 6525lm | 5024lm | ● 3000K | 609433.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 6936lm | 5341lm | ○ 4000K | 609434.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 7204lm | 5547lm | ○ 5000K | 609435.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 7337lm | 5649lm | ● 2700K | 609442.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 7830lm | 6029lm | ● 3000K | 609443.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 8323lm | 6409lm | ○ 4000K | 609444.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 8644lm | 6656lm | ○ 5000K | 609445.B.P.C |

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



6095


Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP67



Architectural OUTDOOR

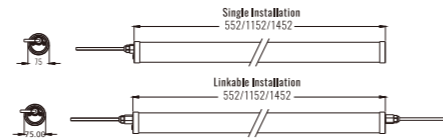


OSRAM 50,000hrs | SMD LED LM80 | Fixed | Ra >90 | UGR <19 | IP67 | 5 years Warranty | AC100-277V 50/60Hz | CE | Stainless Steel+PC | 120°

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|-------------|---------------|---------------|---------|--------------|
| SMD LED | 20W | ∅75x552mm | 928lm | 714lm | ● 2700K | 609512.B.P.C |
| SMD LED | 20W | ∅75x552mm | 990lm | 762lm | ● 3000K | 609513.B.P.C |
| SMD LED | 20W | ∅75x552mm | 1052lm | 810lm | ○ 4000K | 609514.B.P.C |
| SMD LED | 20W | ∅75x552mm | 1093lm | 842lm | ○ 5000K | 609515.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 1855lm | 1429lm | ● 2700K | 609522.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 1980lm | 1525lm | ● 3000K | 609523.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 2105lm | 1621lm | ○ 4000K | 609524.B.P.C |
| SMD LED | 40W | ∅75x1152mm | 2186lm | 1683lm | ○ 5000K | 609525.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 2319lm | 1786lm | ● 2700K | 609532.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 2475lm | 1906lm | ● 3000K | 609533.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 2631lm | 2026lm | ○ 4000K | 609534.B.P.C |
| SMD LED | 50W | ∅175x1452mm | 2732lm | 2104lm | ○ 5000K | 609535.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 2783lm | 2143lm | ● 2700K | 609542.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 2970lm | 2287lm | ● 3000K | 609543.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 3157lm | 2431lm | ○ 4000K | 609544.B.P.C |
| SMD LED | 60W | ∅175x1452mm | 3279lm | 2525lm | ○ 5000K | 609545.B.P.C |

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



6096


Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP65



Architectural OUTDOOR



OSRAM 50,000hrs | SMD LED LM80 | Fixed | Ra >90 | UGR <19 | IP65 | 5 years Warranty | AC100-240V 50/60Hz | CE | PC+PC | 120°

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|--------------|---------------|---------------|---------|--------------|
| SMD LED | 18W | 600x73x63mm | 2201lm | 1695lm | ● 2700K | 609612.B.P.C |
| SMD LED | 18W | 600x73x63mm | 2349lm | 1809lm | ● 3000K | 609613.B.P.C |
| SMD LED | 18W | 600x73x63mm | 2497lm | 1923lm | ○ 4000K | 609614.B.P.C |
| SMD LED | 18W | 600x73x63mm | 2593lm | 1997lm | ○ 5000K | 609615.B.P.C |
| SMD LED | 36W | 1200x73x63mm | 4402lm | 3390lm | ● 2700K | 609622.B.P.C |
| SMD LED | 36W | 1200x73x63mm | 4698lm | 3617lm | ● 3000K | 609623.B.P.C |
| SMD LED | 36W | 1200x73x63mm | 4994lm | 3845lm | ○ 4000K | 609624.B.P.C |
| SMD LED | 36W | 1200x73x63mm | 5187lm | 3994lm | ○ 5000K | 609625.B.P.C |
| SMD LED | 40W | 1500x73x63mm | 4891lm | 3766lm | ● 2700K | 609632.B.P.C |
| SMD LED | 40W | 1500x73x63mm | 5220lm | 4019lm | ● 3000K | 609633.B.P.C |
| SMD LED | 40W | 1500x73x63mm | 5549lm | 4273lm | ○ 4000K | 609634.B.P.C |
| SMD LED | 40W | 1500x73x63mm | 5763lm | 4437lm | ○ 5000K | 609635.B.P.C |

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)

