

SPIKE



SPIKE 7025
6W/15W
P.3-4



SPIKE 7026
18W/25W
P.5



SPIKE 7026
9W/12W/18W/36W
P.7-8



SPIKE 7026
9W/12W/18W/40W
P.9



SPIKE 7027
18W/36W/48W/72W
P.11



SPIKE 7027
15W/30W/60W/108W
P.12



SPIKE 7027
21W/40W/80W/144W
P.13

LED SPOT LIGHT BROCHURE



POCHE



GS-S060



GS-S075



GS-S085



GS-S060



GS-S075



GS-S085

7025


Downlight Recessed. Ambience/UGR

SPIKEseries

IP65



Architectural OUTDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	6W	∅60x155.6mm	668lm	444lm	● 2700K	702512.B.P.C
SMD LED	6W	∅60x155.6mm	713lm	713lm	● 3000K	702513.B.P.C
SMD LED	6W	∅60x155.6mm	758lm	758lm	● 4000K	702514.B.P.C
SMD LED	6W	∅60x155.6mm	787lm	787lm	● 5000K	702515.B.P.C
SMD LED	6W	∅60x155.6mm	510lm	306lm	● RGB	702516.B.4.C

Beam Angle: B(1-10° 2-18° 3-24° 4-38° 5-60° 6-10X60° 7-20X55°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey 3-Orange)

Accessories



Code:3012842.1



Code:3012433.2



Code:3065112.2



7025


Downlight Recessed. Ambience/UGR

SPIKEseries

IP65



Architectural OUTDOOR



Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	15W	∅75x180mm	1670lm	1100lm	● 2700K	702522.B.P.C
SMD LED	15W	∅75x180mm	1782lm	1185lm	● 3000K	702523.B.P.C
SMD LED	15W	∅75x180mm	1894lm	1260lm	● 4000K	702524.B.P.C
SMD LED	15W	∅75x180mm	1967lm	1308lm	● 5000K	702525.B.P.C
SMD LED	15W	∅75x180mm	696lm	487lm	● RGBW	702526.B.4.C

Beam Angle: B(1-10° 2-18° 3-24° 4-38° 5-60° 6-10X60° 7-20X55°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey 3-Orange)

Accessories



Code:3054142.1



Code:3075120.2



Code:3015426.2




Architectural OUTDOOR

7025

Downlight Recessed. Ambience/UGR

SPIKEseries

IP65



OSRAM 50,000hrs
SMD
LED LM80
Fixed
Ra >80
UGR <19
IP66
5 years Warranty
AC100-200V 50/60Hz
CE
Die-cast Aluminum Heatsink
10°
18°
24°
38°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	18W	ø85x213.5mm	918lm	551lm	RGB	702536.B.4.C
SMD LED	25W	ø85x213.5mm	1450lm	1015lm	RGBW	702537.B.4.C

Beam Angle: B(1-10°2-18°3-24°4-38°5-60°6-10X60°7-20X55°)

Colour Finish: C(1 -Black 2 - Grey 3 - Orange)

Accessories



GS-SP80

GS-SP80

GS-SP100

GS-SP150

7026


Downlight Recessed. Ambience/UGR

SPIKEseries

IP65



Architectural OUTDOOR

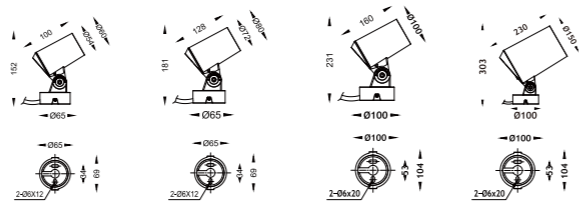

OSRAM 50,000hrs | SMD LED LM80 | Fixed | Ra >80 | UGR <19 | IP66 | 5 years Warranty | AC100-277V 50/60Hz | CE | Die-cast Aluminum Heatsink | 10° 18° 24° 38° 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	6W	∅60x100mm	683lm	464lm	● 2700K	702612.B.P.C
SMD LED	6W	∅60x100mm	729lm	495lm	● 3000K	702613.B.P.C
SMD LED	6W	∅60x100mm	775lm	526lm	○ 4000K	702614.B.P.C
SMD LED	6W	∅60x100mm	805lm	546lm	○ 5000K	702615.B.P.C
SMD LED	10W	∅80x128mm	1130lm	767lm	● 2700K	702622.B.P.C
SMD LED	10W	∅80x128mm	1206lm	819lm	● 3000K	702623.B.P.C
SMD LED	10W	∅80x128mm	1282lm	870lm	○ 4000K	702624.B.P.C
SMD LED	10W	∅80x128mm	1331lm	904lm	○ 5000K	702625.B.P.C
SMD LED	18W	∅100x160mm	2034lm	1381lm	● 2700K	702632.B.P.C
SMD LED	18W	∅100x160mm	2171lm	1474lm	● 3000K	702633.B.P.C
SMD LED	18W	∅100x160mm	2308lm	1567lm	○ 4000K	702634.B.P.C
SMD LED	18W	∅100x160mm	2397lm	1627lm	○ 5000K	702635.B.P.C
SMD LED	36W	∅150x230mm	4068lm	2762lm	● 2700K	702642.B.P.C
SMD LED	36W	∅150x230mm	4342lm	2948lm	● 3000K	702643.B.P.C
SMD LED	36W	∅150x230mm	4615lm	3134lm	○ 4000K	702644.B.P.C
SMD LED	36W	∅150x230mm	4793lm	3255lm	○ 5000K	702645.B.P.C

Beam Angle: B(1-10° 2-18° 3-24° 4-38° 5-60° 6-10X60° 7-20X55°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim 4-DMX)

Colour Finish: C(1 -Black 2 - Grey)



7026


Downlight Recessed. Ambience/UGR

SPIKEseries

IP65



Architectural OUTDOOR

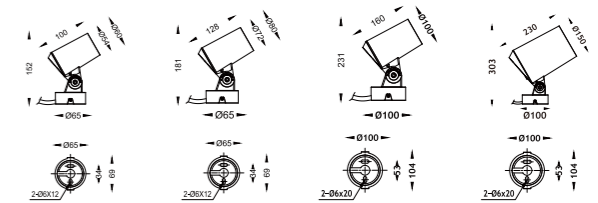


OSRAM 50,000hrs | SMD LED LM80 | Fixed | Ra >80 | UGR <19 | IP66 | 5 years Warranty | AC100-277V 50/60Hz | CE | Die-cast Aluminum Heatsink | 10° 18° 24° 38° 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	9W	∅60x100x152mm	459lm	280lm	● RGB	702616.B.4.C
SMD LED	12W	∅80x128x181mm	636lm	394lm	● RGB	702617.B.4.C
SMD LED	18W	∅100x160x231mm	954lm	591lm	● RGB	702618.B.4.C
SMD LED	36W	∅150x230x303 mm	1872lm	1161lm	● RGB	702619.B.4.C

Beam Angle: B(1-10° 2-18° 3-24° 4-38° 5-60° 6-10X60° 7-20X55°)

Power Supply: P(1-On/Off 2-DMX)

Colour Finish: C(1 -Black 2 - Grey)



Architectural OUTDOOR

7026


Downlight Recessed. Ambience/UGR

SPIKE series

IP65



RGB W+WW
TUNABLE

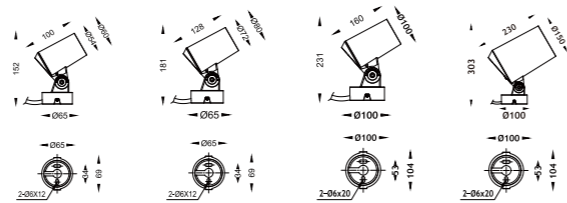


OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >80	UGR <19	IP66	5 years Warranty	AC100-277V 50/60Hz	CE	Die-cast Aluminum Heatsink	10° 18° 24° 38° 60°
--------------------	-----	-------------	-------	-----------	------------	------	---------------------	-----------------------	----	-------------------------------	---------------------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	9W	∅60x100x152mm	540lm	378lm	RGBW	702636.B.5.C
SMD LED	12W	∅80x128x181mm	744lm	521lm	RGBW	702637.B.5.C
SMD LED	18W	∅100x160x231mm	1080lm	756lm	RGBW	702638.B.5.C
SMD LED	40W	∅150x230x303 mm	2440lm	1708lm	RGBW	702639.B.5.C

Beam Angle: B(1-10° 2-18° 3-24° 4-38° 5-60° 6-10x60° 7-20x55°)

Colour Finish: C(1 -Black 2 - Grey)



POCHE



GS-SW130 GS-SW80 GS-SW100 GS-SW150

7027


Downlight Recessed. Ambience/UGR

SPIKEseries

IP65



ArchitecturalOUTDOOR

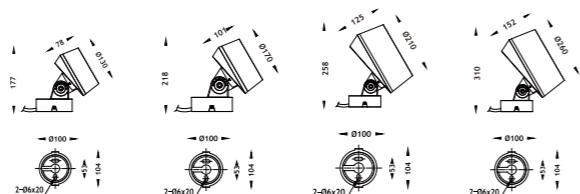

OSRAM 50,000hrs SMD LED LM80 Fixed Ra >80 UGR <19 IP66 5 years Warranty AC100-277V 50/60Hz CE Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	18W	∅130x78mm	1852lm	1361lm	● 2700K	702712.B.P.C
SMD LED	18W	∅130x78mm	1976lm	1453lm	● 3000K	702713.B.P.C
SMD LED	18W	∅130x78mm	2101lm	1544lm	○ 4000K	702714.B.P.C
SMD LED	18W	∅130x78mm	2182lm	1604lm	○ 5000K	702715.B.P.C
SMD LED	36W	∅170x101mm	3704lm	2722lm	● 2700K	702722.B.P.C
SMD LED	36W	∅170x101mm	3953lm	2905lm	● 3000K	702723.B.P.C
SMD LED	36W	∅170x101mm	4202lm	3088lm	○ 4000K	702724.B.P.C
SMD LED	36W	∅170x101mm	4364lm	3207lm	○ 5000K	702725.B.P.C
SMD LED	48W	∅210x125mm	4938lm	3630lm	● 2700K	702732.B.P.C
SMD LED	48W	∅210x125mm	5270lm	3874lm	● 3000K	702733.B.P.C
SMD LED	48W	∅210x125mm	5602lm	4178lm	○ 4000K	702734.B.P.C
SMD LED	48W	∅210x125mm	5819lm	4277lm	○ 5000K	702735.B.P.C
SMD LED	72W	∅260x152mm	6983lm	5132lm	● 2700K	702742.B.P.C
SMD LED	72W	∅260x152mm	7452lm	5477lm	● 3000K	702743.B.P.C
SMD LED	72W	∅260x152mm	7921lm	5822lm	○ 4000K	702744.B.P.C
SMD LED	72W	∅260x152mm	8227lm	6047lm	○ 5000K	702745.B.P.C

Beam Angle: B(1-10° 2-18° 3-24° 4-38° 5-60° 6-10X60° 7-20X55°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



7027


Downlight Recessed. Ambience/UGR

SPIKEseries

IP65



ArchitecturalOUTDOOR

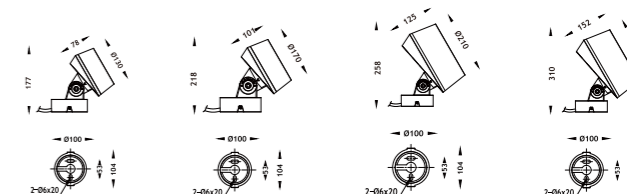


OSRAM 50,000hrs SMD LED LM80 Fixed Ra >80 UGR <19 IP66 5 years Warranty AC100-277V 50/60Hz CE Die-cast Aluminum Heatsink

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	15W	∅130x78x177mm	630lm	410lm	● RGB	702726.B.5.C
SMD LED	30W	∅170x101x218mm	1440lm	936lm	● RGB	702727.B.5.C
SMD LED	60W	∅210x125x258mm	3060lm	1989lm	● RGB	702728.B.5.C
SMD LED	108W	∅260x152x310mm	4860lm	3159lm	● RGB	702729.B.5.C

Beam Angle: B(1-10° 2-18° 3-24° 4-38° 5-60° 6-10X60° 7-20X55°)

Power Supply: P(1-On/Off 2-DMX)

Colour Finish: C(1-Black 2-Grey)



Architectural OUTDOOR

7027


Downlight Recessed. Ambience/UGR

SPIKEseries

IP65



RGB W+WW
TUNABLE

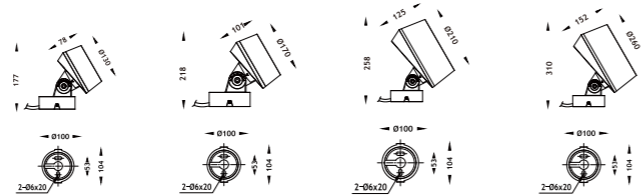

OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >80	UGR <19	IP66	5 years Warranty	AC100-277V 50/60Hz	CE	Die-cast Aluminum Heatsink	10° 18° 24° 38° 60°
---------------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	-------------------------------	---------------------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	21W	ø130x78x177mm	1029lm	720lm	RGBW	702726.B.5.C
SMD LED	40W	ø170x101x218mm	2320lm	1624lm	RGBW	702727.B.5.C
SMD LED	80W	ø210x125x258mm	4640lm	3248lm	RGBW	702728.B.5.C
SMD LED	144W	ø260x152x310mm	7632lm	5342lm	RGBW	702729.B.5.C

Beam Angle: B(1-10° 2-18° 3-24° 4-38° 5-60° 6-10X60° 7-20X55°)

Power Supply: P(1-0n/Off 2-DMX)

Colour Finish: C(1-Black 2-Grey)

