

STAIR LIGHT



STAIR 8040
3W
P.1



STAIR 8044
3W
P.5



STAIR 8048
3W
P.9



STAIR 8052
3W
P.13



STAIR 8056
3W
P.17



STAIR 8041
3W
P.2



STAIR 8045
3W
P.6



STAIR 8049
3W
P.10



STAIR 8053
3W/6W
P.14



STAIR 8057
6W
P.18



SENSOR
STAIR 8042
3W
P.3



SENSOR
STAIR 8046
3W
P.7



STAIR 8050
3W/6W
P.11



STAIR 8054
3W/6W
P.15



SENSOR
STAIR 8043
3W
P.4



SENSOR
STAIR 8047
3W
P.8



STAIR 8051
3W
P.12



STAIR 8055
3W
P.16

8040


Downlight Recessed. Ambience/UGR

STAIR series

IP65



Architectural OUTDOOR

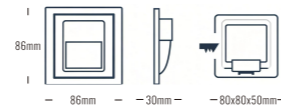

OSRAM | SMD | LED LM80 | | Ra >80 | UGR <19 | | | AC220-240V 50/60Hz | | Die-cast Aluminum Heatsink |

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	90x90x40mm	281lm	207lm	● 2700K	804012.B.P.C
SMD LED	3W	90x90x40mm	300lm	221lm	● 3000K	804013.B.P.C
SMD LED	3W	90x90x40mm	319lm	234lm	○ 4000K	804014.B.P.C
SMD LED	3W	90x90x40mm	331lm	243lm	○ 5000K	804015.B.P.C

Beam Angle: B(1-20° 2-60° 3-90°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)



8041


Downlight Recessed. Ambience/UGR

STAIR series

IP65



Architectural OUTDOOR

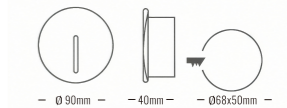

OSRAM | SMD | LED LM80 | | Ra >80 | UGR <19 | | | AC220-240V 50/60Hz | | Die-cast Aluminum Heatsink |

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	Ø90x40mm	281lm	207lm	● 2700K	804112.B.P.C
SMD LED	3W	Ø90x40mm	300lm	221lm	● 3000K	804113.B.P.C
SMD LED	3W	Ø90x40mm	319lm	234lm	○ 4000K	804114.B.P.C
SMD LED	3W	Ø90x40mm	331lm	243lm	○ 5000K	804115.B.P.C

Beam Angle: B(1-20° 2-60° 3-90°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)



8042


Downlight Recessed. Ambience/UGR

STAIRseries

IP65



ArchitecturalOUTDOOR

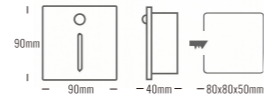

OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >80 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 20° 60° 90°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	90x90x40mm	281lm	197lm	● 2700K	804212.B.P.C
SMD LED	3W	90x90x40mm	300lm	210lm	● 3000K	804213.B.P.C
SMD LED	3W	90x90x40mm	319lm	223lm	● 4000K	804214.B.P.C
SMD LED	3W	90x90x40mm	331lm	232lm	● 5000K	804215.B.P.C

Beam Angle: B(1-20° 2-60° 3-90°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)



8043


Downlight Recessed. Ambience/UGR

STAIRseries

IP65



ArchitecturalOUTDOOR



OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >80 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 20° 60° 90°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	∅90x40mm	281lm	191lm	● 2700K	804312.B.P.C
SMD LED	3W	∅90x40mm	300lm	210lm	● 3000K	804313.B.P.C
SMD LED	3W	∅90x40mm	319lm	223lm	● 4000K	804314.B.P.C
SMD LED	3W	∅90x40mm	331lm	232lm	● 5000K	804315.B.P.C

Beam Angle: B(1-20° 2-60° 3-90°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)




8044

Downlight Recessed. Ambience/UGR

STAIRseries

ArchitecturalINDOOR

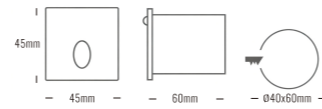

OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >80	UGR <19	IP20	5 Years Warranty	AC220-240V 50/60Hz	CE	Die-cast Aluminum Heatsink	60°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	-------------------------------	-----

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	80x80x50mm	273lm	210lm	● 2700K	804412.B.P.C
SMD LED	3W	80x80x50mm	291lm	224lm	● 3000K	804413.B.P.C
SMD LED	3W	80x80x50mm	306m	238lm	○ 4000K	804414.B.P.C
SMD LED	3W	80x80x50mm	321m	247lm	○ 5000K	804415.B.P.C

Beam Angle: B(1-60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)




8045

Downlight Recessed. Ambience/UGR

STAIRseries

ArchitecturalINDOOR

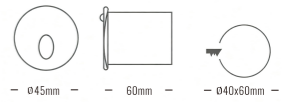

OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >80	UGR <19	IP20	5 Years Warranty	AC220-240V 50/60Hz	CE	Die-cast Aluminum Heatsink	60°
--------------------	-----	-------------	-------	-----------	------------	------	------------------------	-----------------------	----	-------------------------------	-----

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	Ø65x60mm	273lm	210lm	● 2700K	804512.B.P.C
SMD LED	3W	Ø65x60mm	291lm	224lm	● 3000K	804513.B.P.C
SMD LED	3W	Ø65x60mm	306m	238lm	○ 4000K	804514.B.P.C
SMD LED	3W	Ø65x60mm	321m	247lm	○ 5000K	804515.B.P.C

Beam Angle: B(1-60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)




8046

Downlight Recessed. Ambience/UGR

STAIRseries

ArchitecturalINDOOR

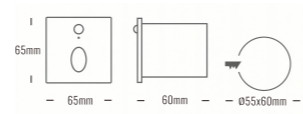

OSRAM 50,000hrs | SMD LED LM80 | Fixed | Ra >80 | UGR <19 | IP20 | 5 Years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	80x80x50mm	218lm	168lm	● 2700K	804612.B.P.C
SMD LED	3W	80x80x50mm	233lm	179lm	● 3000K	804613.B.P.C
SMD LED	3W	80x80x50mm	247lm	191lm	○ 4000K	804614.B.P.C
SMD LED	3W	80x80x50mm	257lm	198lm	○ 5000K	804615.B.P.C

Beam Angle: B(1-60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)




8047

Downlight Recessed. Ambience/UGR

STAIRseries

ArchitecturalOUTDOOR

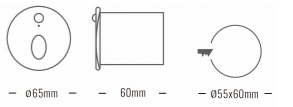

OSRAM 50,000hrs | SMD LED LM80 | Fixed | Ra >80 | UGR <19 | IP20 | 5 Years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	∅65x60mm	218lm	168lm	● 2700K	804712.B.P.C
SMD LED	3W	∅65x60mm	233lm	179lm	● 3000K	804713.B.P.C
SMD LED	3W	∅65x60mm	247lm	191lm	○ 4000K	804714.B.P.C
SMD LED	3W	∅65x60mm	257lm	198lm	○ 5000K	804715.B.P.C

Beam Angle: B(1-60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)




8048

Downlight Recessed. Ambience/UGR

STAIRseries

ArchitecturalINDOOR



OSRAM | SMD | LED LM80 | | Ra >80 | UGR <19 | IP20 | | AC220-240V 50/60Hz | | Die-cast Aluminum Heatsink |

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	145x100x50mm	295lm	227lm	● 2700K	803012.B.P.C
SMD LED	3W	145x100x50mm	315lm	243lm	● 3000K	803013.B.P.C
SMD LED	3W	145x100x50mm	335lm	258lm	○ 4000K	803014.B.P.C
SMD LED	3W	145x100x50mm	348lm	268lm	○ 5000K	803015.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)




8049

Downlight Recessed. Ambience/UGR

STAIRseries

ArchitecturalINDOOR

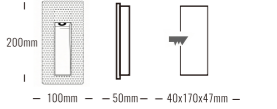

OSRAM | SMD | LED LM80 | | Ra >80 | UGR <19 | IP20 | | AC220-240V 50/60Hz | | Die-cast Aluminum Heatsink |

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	200x100x50mm	295lm	205lm	● 2700K	804912.B.P.C
SMD LED	3W	200x100x50mm	315lm	223lm	● 3000K	804913.B.P.C
SMD LED	3W	200x100x50mm	335lm	237lm	○ 4000K	804914.B.P.C
SMD LED	3W	200x100x50mm	348lm	246lm	○ 5000K	804915.B.P.C

Beam Angle: B(1-60°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



8050


Downlight Recessed. Ambience/UGR

STAIR series

IP65



Architectural OUTDOOR

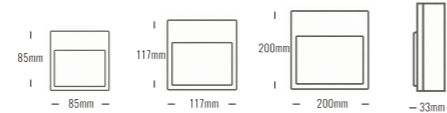

OSRAM 50,000hrs SMD LED LM80 Fixed Ra >80 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	85x85x33mm	301lm	211lm	● 2700K	805012.B.P.C
SMD LED	3W	85x85x33mm	321lm	225lm	● 3000K	805013.B.P.C
SMD LED	3W	85x85x33mm	341lm	239lm	○ 4000K	805014.B.P.C
SMD LED	3W	85x85x33mm	354lm	248lm	○ 5000K	805015.B.P.C
SMD LED	3W	117x117x33mm	271lm	208lm	● 2700K	805022.B.P.C
SMD LED	3W	117x117x33mm	289lm	222lm	● 3000K	805023.B.P.C
SMD LED	3W	117x117x33mm	307lm	236lm	○ 4000K	805024.B.P.C
SMD LED	3W	117x117x33mm	319lm	246lm	○ 5000K	805025.B.P.C
SMD LED	6W	200x200x33mm	541lm	417lm	● 2700K	805032.B.P.C
SMD LED	6W	200x200x33mm	578lm	445lm	● 3000K	805033.B.P.C
SMD LED	6W	200x200x33mm	614lm	473lm	○ 4000K	805034.B.P.C
SMD LED	6W	200x200x33mm	638lm	491lm	○ 5000K	805035.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)



8051

Downlight Recessed. Ambience/UGR

STAIR series

IP65



Architectural OUTDOOR



OSRAM 50,000hrs SMD LED LM80 Fixed Ra >80 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	117x117x33mm	268lm	206lm	● 2700K	805112.B.P.C
SMD LED	3W	117x117x33mm	286lm	220lm	● 3000K	805113.B.P.C
SMD LED	3W	117x117x33mm	304lm	234lm	○ 4000K	805114.B.P.C
SMD LED	3W	117x117x33mm	316lm	243lm	○ 5000K	805115.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)



8052


Downlight Recessed. Ambience/UGR

STAIR series

IP65



Architectural OUTDOOR



OSRAM 50,000hrs SMD LED LM80 Fixed Ra >90 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	117x117x33mm	298lm	225lm	● 2700K	805212.B.P.C
SMD LED	3W	117x117x33mm	286lm	216lm	● 3000K	805213.B.P.C
SMD LED	3W	117x117x33mm	338lm	256lm	○ 4000K	805214.B.P.C
SMD LED	3W	117x117x33mm	351lm	265lm	○ 5000K	805215.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)



8053


Downlight Recessed. Ambience/UGR

STAIR series

IP65



Architectural OUTDOOR

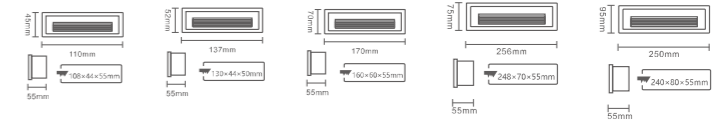

OSRAM 50,000hrs SMD LED LM80 Fixed Ra >80 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	110x55x45mm	309lm	177lm	● 2700K	805312.B.P.C
SMD LED	3W	110x55x45mm	330lm	189lm	● 3000K	805313.B.P.C
SMD LED	3W	110x55x45mm	351lm	201lm	○ 4000K	805314.B.P.C
SMD LED	3W	110x55x45mm	364lm	209lm	○ 5000K	805315.B.P.C
SMD LED	3W	137x52x55mm	309lm	182lm	● 2700K	805322.B.P.C
SMD LED	3W	137x52x55mm	330lm	194lm	● 3000K	805323.B.P.C
SMD LED	3W	137x52x55mm	351lm	206lm	○ 4000K	805324.B.P.C
SMD LED	3W	137x52x55mm	364lm	214lm	○ 5000K	805325.B.P.C
SMD LED	6W	170x70x55mm	618lm	355lm	● 2700K	805332.B.P.C
SMD LED	6W	170x70x55mm	660lm	379lm	● 3000K	805333.B.P.C
SMD LED	6W	170x70x55mm	702lm	403lm	○ 4000K	805334.B.P.C
SMD LED	6W	170x70x55mm	729lm	418lm	○ 5000K	805335.B.P.C
SMD LED	6W	256x75x55mm	618lm	364lm	● 2700K	805342.B.P.C
SMD LED	6W	256x75x55mm	660lm	388lm	● 3000K	805343.B.P.C
SMD LED	6W	256x75x55mm	702lm	413lm	○ 4000K	805344.B.P.C
SMD LED	6W	256x75x55mm	729lm	428lm	○ 5000K	805345.B.P.C
SMD LED	6W	250x95x55mm	618lm	372lm	● 2700K	805352.B.P.C
SMD LED	6W	250x95x55mm	660lm	397lm	● 3000K	805353.B.P.C
SMD LED	6W	250x95x55mm	702lm	422lm	○ 4000K	805354.B.P.C
SMD LED	6W	250x95x55mm	729lm	439lm	○ 5000K	805355.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)



8054

Downlight Recessed. Ambience/UGR

STAIR series

IP65



Architectural OUTDOOR



OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >80 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	117x117x60mm	306lm	182lm	● 2700K	805412.B.P.C
SMD LED	3W	117x117x60mm	327lm	195lm	● 3000K	805413.B.P.C
SMD LED	3W	117x117x60mm	348lm	207lm	○ 4000K	805414.B.P.C
SMD LED	3W	117x117x60mm	361lm	215lm	○ 5000K	805415.B.P.C
SMD LED	6W	160x160x43mm	613lm	386lm	● 2700K	805422.B.P.C
SMD LED	6W	160x160x43mm	654lm	412lm	● 3000K	805423.B.P.C
SMD LED	6W	160x160x43mm	695lm	438lm	○ 4000K	805424.B.P.C
SMD LED	6W	160x160x43mm	722lm	455lm	○ 5000K	805425.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)



8055


Downlight Recessed. Ambience/UGR

STAIR series

IP65



Architectural OUTDOOR

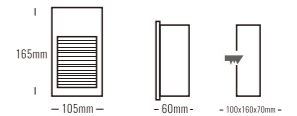

OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >80 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	105x165x60mm	306lm	193lm	● 2700K	805512.B.P.C
SMD LED	3W	105x165x60mm	327lm	206lm	● 3000K	805513.B.P.C
SMD LED	3W	105x165x60mm	348lm	219lm	○ 4000K	805514.B.P.C
SMD LED	3W	105x165x60mm	361lm	227lm	○ 5000K	805515.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)



8056


Downlight Recessed. Ambience/UGR

STAIR series

IP65



Architectural OUTDOOR



OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >80 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	3W	105x40x50mm	253lm	142lm	● 2700K	805612.B.P.C
SMD LED	3W	105x40x50mm	270lm	151lm	● 3000K	805613.B.P.C
SMD LED	3W	105x40x50mm	287lm	161lm	○ 4000K	805614.B.P.C
SMD LED	3W	105x40x50mm	298lm	167lm	○ 5000K	805615.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)



8057


Downlight Recessed. Ambience/UGR

STAIR series

IP65



Architectural OUTDOOR



OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >80 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	6W	185x40x44mm	228lm	131lm	● 2700K	803112.B.P.C
SMD LED	6W	185x40x44mm	243lm	139lm	● 3000K	803113.B.P.C
SMD LED	6W	185x40x44mm	258lm	148lm	○ 4000K	803114.B.P.C
SMD LED	6W	185x40x44mm	268lm	154lm	○ 5000K	803115.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White 2-Black 3-Dark Grey 4-Light Grey)

