

STREET LIGHT



STREET LIGHT 7018
30W/100W/150W/200W/240W
P.3-4



STREET LIGHT 7019
40W/60W/100W/150W
200W/240W/300W
P.7-8



STREET LIGHT 7020
50W
P.9



STREET LIGHT 7021
2*50W
P.10




7018

Downlight Recessed. Ambience/UGR

STREET LIGHT series

Architectural OUTDOOR

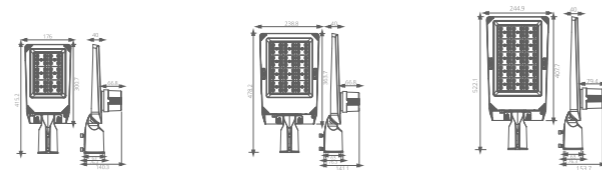

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|----------------|---------------|---------------|-------|--------------|
| SMD LED | 30W | 176x415.2x40mm | ● 3289lm | ● 2532lm | 2700K | 701812.B.P.C |
| SMD LED | 30W | 176x415.2x40mm | ● 3900lm | ● 3003lm | 3000K | 701813.B.P.C |
| SMD LED | 30W | 176x415.2x40mm | ○ 4146lm | ○ 3192lm | 4000K | 701814.B.P.C |
| SMD LED | 30W | 176x415.2x40mm | ○ 4306lm | ○ 3315lm | 5000K | 701815.B.P.C |

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|------------------|---------------|---------------|-------|--------------|
| SMD LED | 100W | 238.8x478.2x40mm | ● 10963lm | ● 8441lm | 2700K | 701822.B.P.C |
| SMD LED | 100W | 238.8x478.2x40mm | ● 13000lm | ● 10010lm | 3000K | 701823.B.P.C |
| SMD LED | 100W | 238.8x478.2x40mm | ○ 13819lm | ○ 10641lm | 4000K | 701824.B.P.C |
| SMD LED | 100W | 238.8x478.2x40mm | ○ 14352lm | ○ 11051lm | 5000K | 701825.B.P.C |


| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|------------------|---------------|---------------|-------|--------------|
| SMD LED | 150W | 244.9x522.1x40mm | ● 12662lm | ● 16444lm | 2700K | 701832.B.P.C |
| SMD LED | 150W | 244.9x522.1x40mm | ● 15015lm | ● 19500lm | 3000K | 701833.B.P.C |
| SMD LED | 150W | 244.9x522.1x40mm | ○ 15961lm | ○ 20729lm | 4000K | 701834.B.P.C |
| SMD LED | 150W | 244.9x522.1x40mm | ○ 16577lm | ○ 21528lm | 5000K | 701835.B.P.C |

Beam Angle: B(1-30°2-45°3-60°4-90°)

Power Supply: P(1-0n/Off)



Colour Finish: C(1-Black 2-Grey)




7018

Downlight Recessed. Ambience/UGR

STREET LIGHT series

Architectural OUTDOOR

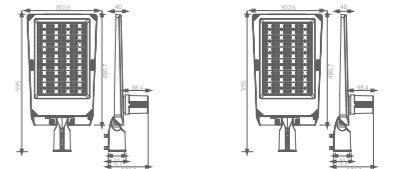

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|----------------|---------------|---------------|-------|--------------|
| SMD LED | 200W | 302.6x595x40mm | ● 21926lm | ● 16883lm | 2700K | 701842.B.P.C |
| SMD LED | 200W | 302.6x595x40mm | ● 26000lm | ● 20020lm | 3000K | 701843.B.P.C |
| SMD LED | 200W | 302.6x595x40mm | ○ 27638lm | ○ 21281lm | 4000K | 701844.B.P.C |
| SMD LED | 200W | 302.6x595x40mm | ○ 28704lm | ○ 22102lm | 5000K | 701845.B.P.C |

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|----------------|---------------|---------------|-------|--------------|
| SMD LED | 240W | 302.6x595x40mm | ● 25299lm | ● 19480lm | 2700K | 701852.B.P.C |
| SMD LED | 240W | 302.6x595x40mm | ● 30000lm | ● 23100lm | 3000K | 701853.B.P.C |
| SMD LED | 240W | 302.6x595x40mm | ○ 31890lm | ○ 24555lm | 4000K | 701854.B.P.C |
| SMD LED | 240W | 302.6x595x40mm | ○ 33120lm | ○ 25502lm | 5000K | 701855.B.P.C |

Beam Angle: B(1-30°2-45°3-60°4-90°)

Power Supply: P(1-0n/Off)




Colour Finish: C(1-Black 2-Grey)




LED STREET LIGHT - S Series

Lamp on / off / Dim / metering / alarm operation / strategy storage. LoRa gateway coverage radius of 2-5kilometer.


Easy to install. Strong system expansion ability and increase sensor devices. Low power consumption, large capacity , high stability.

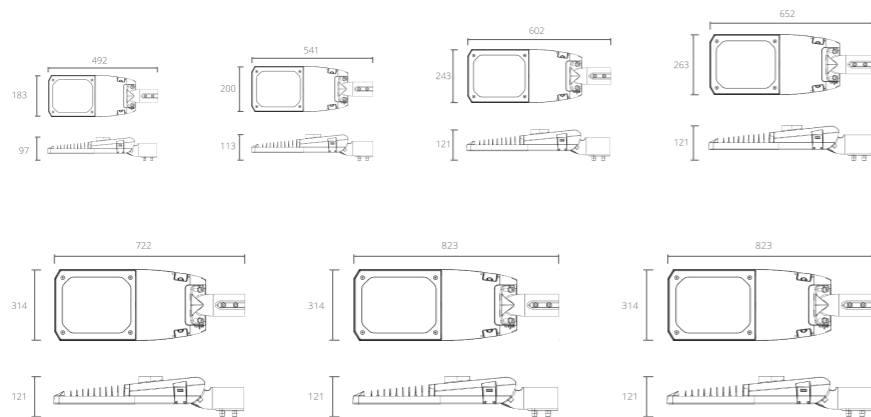


Multiple light distribution options




For sidewalks, paths and shoulders lighting




For wider sidewalks, ramps, entrance roadways, etc.

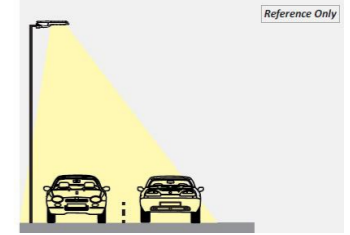

Be applicable to residential areas, highways, bridges, etc.

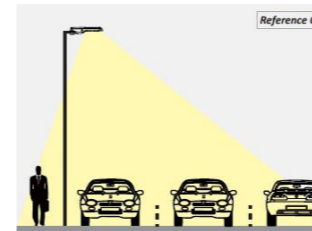


For roadways, large parking areas and other area lighting

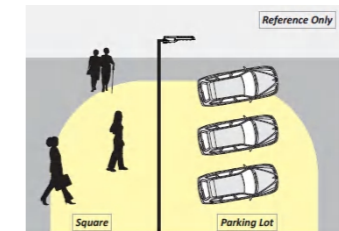


Be applicable to parking lots, center islands, intersections, and large commercial parking lots, etc.


Light distribution curve selection




120°




113°×97°




TI




T II-M




T III-M



T IV-M



TV




T II-BLS

7019

Downlight Recessed. Ambience/UGR

STREET LIGHT series

Architectural OUTDOOR

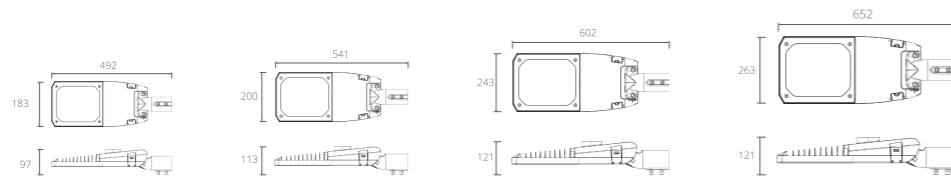

| | | | | | | | | | | | |
|--------------------|-----|-------------|-------|-----------|------------|------|------------------------|-----------------------|----|-------------------------------|------|
| OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >70 | UGR <19 | IP65 | 5 years warranty | AC100-305V 50/60Hz | CE | Die-cast Aluminum Heatsink | 120° |
|--------------------|-----|-------------|-------|-----------|------------|------|------------------------|-----------------------|----|-------------------------------|------|

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|--------------|---------------|---------------|-------|--------------|
| SMD LED | 40W | 492x183x97mm | ● 3913lm | ● 3013lm | 2700K | 701912.B.P.C |
| SMD LED | 40W | 492x183x97mm | ● 4640lm | ● 3573lm | 3000K | 701913.B.P.C |
| SMD LED | 40W | 492x183x97mm | ○ 4932lm | ○ 3798lm | 4000K | 701914.B.P.C |
| SMD LED | 40W | 492x183x97mm | ○ 5123lm | ○ 3944lm | 5000K | 701915.B.P.C |

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|---------------|---------------|---------------|-------|--------------|
| SMD LED | 60W | 541x200x113mm | ● 5869lm | ● 4519lm | 2700K | 701922.B.P.C |
| SMD LED | 60W | 541x200x113mm | ● 6960lm | ● 5359lm | 3000K | 701923.B.P.C |
| SMD LED | 60W | 541x200x113mm | ○ 7398lm | ○ 5697lm | 4000K | 701924.B.P.C |
| SMD LED | 60W | 541x200x113mm | ○ 7684lm | ○ 5917lm | 5000K | 701925.B.P.C |

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|---------------|---------------|---------------|-------|--------------|
| SMD LED | 100W | 602x243x121mm | ● 9782lm | ● 7532lm | 2700K | 701932.B.P.C |
| SMD LED | 100W | 602x243x121mm | ● 11600lm | ● 8932lm | 3000K | 701933.B.P.C |
| SMD LED | 100W | 602x243x121mm | ○ 12331lm | ○ 9495lm | 4000K | 701934.B.P.C |
| SMD LED | 100W | 602x243x121mm | ○ 12806lm | ○ 9861lm | 5000K | 701935.B.P.C |

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|---------------|---------------|---------------|-------|--------------|
| SMD LED | 150W | 652x263x121mm | ● 14673lm | ● 11299lm | 2700K | 701942.B.P.C |
| SMD LED | 150W | 652x263x121mm | ● 17400lm | ● 13398lm | 3000K | 701943.B.P.C |
| SMD LED | 150W | 652x263x121mm | ○ 18496lm | ○ 14242lm | 4000K | 701944.B.P.C |
| SMD LED | 150W | 652x263x121mm | ○ 19210lm | ○ 14791lm | 5000K | 701945.B.P.C |

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off)

Colour Finish: C(1 -Black 2 - Grey)




7019

Downlight Recessed. Ambience/UGR

STREET LIGHT series

Architectural OUTDOOR

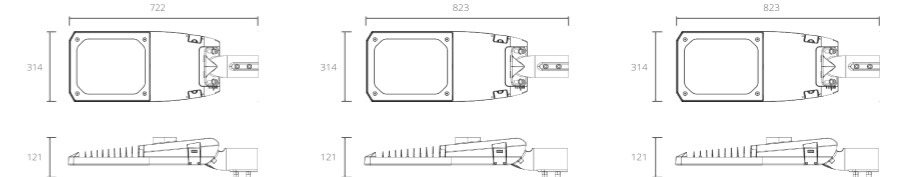

| | | | | | | | | | | | |
|--------------------|-----|-------------|-------|-----------|------------|------|------------------------|-----------------------|----|-------------------------------|------|
| OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >70 | UGR <19 | IP66 | 5 years warranty | AC100-305V 50/60Hz | CE | Die-cast Aluminum Heatsink | 120° |
|--------------------|-----|-------------|-------|-----------|------------|------|------------------------|-----------------------|----|-------------------------------|------|

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|---------------|---------------|---------------|-------|--------------|
| SMD LED | 200W | 722x314x121mm | ● 19565lm | ● 15065lm | 2700K | 701952.B.P.C |
| SMD LED | 200W | 722x314x121mm | ● 23200lm | ● 17864lm | 3000K | 701953.B.P.C |
| SMD LED | 200W | 722x314x121mm | ○ 24662lm | ○ 18989lm | 4000K | 701954.B.P.C |
| SMD LED | 200W | 722x314x121mm | ○ 25613lm | ○ 19722lm | 5000K | 701955.B.P.C |

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|---------------|---------------|---------------|-------|--------------|
| SMD LED | 240W | 823x314x121mm | ● 23477lm | ● 18078lm | 2700K | 701962.B.P.C |
| SMD LED | 240W | 823x314x121mm | ● 27840lm | ● 21437lm | 3000K | 701963.B.P.C |
| SMD LED | 240W | 823x314x121mm | ○ 29594lm | ○ 22787lm | 4000K | 701964.B.P.C |
| SMD LED | 240W | 823x314x121mm | ○ 30735lm | ○ 23666lm | 5000K | 701965.B.P.C |

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|---------------|---------------|---------------|-------|--------------|
| SMD LED | 300W | 823x314x121mm | ● 29347lm | ● 22597lm | 2700K | 701972.B.P.C |
| SMD LED | 300W | 823x314x121mm | ● 34800lm | ● 26796lm | 3000K | 701973.B.P.C |
| SMD LED | 300W | 823x314x121mm | ○ 36992lm | ○ 28484lm | 4000K | 701974.B.P.C |
| SMD LED | 300W | 823x314x121mm | ○ 38419lm | ○ 29583lm | 5000K | 701975.B.P.C |

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off)

Colour Finish: C(1 -Black 2 - Grey)




7020

Downlight Recessed. Ambience/UGR

STREET LIGHT series

Architectural OUTDOOR




OSRAM 50,000hrs |
 SMD |
 LED LM80 |
 Fixed |
 Ra >90 |
 UGR <19 |
 IP55 |
 5 years Warranty |
 AC220-240V 50/60Hz |
 CE |
 Die-cast Aluminum Heatsink |
 12° 24° 36° 60°

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|------------|---------------|---------------|-------|--------------|
| SMD LED | 50W | 710x3350mm | ● 3162lm | ● 2435lm | 2700K | 702012.B.P.C |
| SMD LED | 50W | 710x3350mm | ● 3750lm | ● 2888lm | 3000K | 702013.B.P.C |
| SMD LED | 50W | 710x3350mm | ○ 3986lm | ○ 3069lm | 4000K | 702014.B.P.C |
| SMD LED | 50W | 710x3350mm | ○ 4140lm | ○ 3188lm | 5000K | 702015.B.P.C |

Beam Angle: B(1-12° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off)

Colour Finish: C(1-Black 2-Grey)




7021

Downlight Recessed. Ambience/UGR

STREET LIGHT series

Architectural OUTDOOR

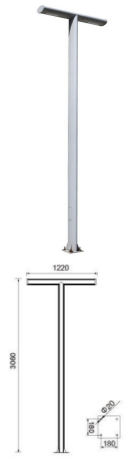

OSRAM 50,000hrs |
 SMD |
 LED LM80 |
 Fixed |
 Ra >90 |
 UGR <19 |
 IP55 |
 5 years Warranty |
 AC220-240V 50/60Hz |
 CE |
 Die-cast Aluminum Heatsink |
 12° 24° 36° 60°

| Light Source | Power | Size | Source Lumens | System Lumens | CCT | Code |
|--------------|-------|-------------|---------------|---------------|-------|--------------|
| SMD LED | 2x50W | 3060x1220mm | ● 6325lm | ● 4870lm | 2700K | 702112.B.P.C |
| SMD LED | 2x50W | 3060x1220mm | ● 7500lm | ● 5775lm | 3000K | 702113.B.P.C |
| SMD LED | 2x50W | 3060x1220mm | ○ 7973lm | ○ 6139lm | 4000K | 702114.B.P.C |
| SMD LED | 2x50W | 3060x1220mm | ○ 8280lm | ○ 6376lm | 5000K | 702115.B.P.C |

Beam Angle: B(1-12° 2-24° 3-36° 4-60°)

Power Supply: P(1-On/Off)

Colour Finish: C(1-Black 2-Grey)

