

TRI PROOF



TRI-PROOF 6086
20W/40W/50W
P.1



TRI-PROOF 6087
18W/36W/50W/60W
P.2



TRI-PROOF 6088
40W/80W/120W
P.4



TRI-PROOF 6089
20W/40W/60W
P.5



TRI-PROOF 6090
20W/40W/60W
P.6



TRI-PROOF 6091
20W/40W/50W/60W
P.8



TRI-PROOF 6092
20W/40W/50W/60W
P.10



TRI-PROOF 6093
20W/40W/50W/60W
P.11



TRI-PROOF 6094
20W/40W/50W/60W
P.12



TRI-PROOF 6095
20W/40W/50W/60W
P.13



TRI-PROOF 6096
18W/36W/40W
P.14

6086

Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP65



Architectural OUTDOOR



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP65	5 years Warranty	AC220-240V 50/60Hz	CE	PC+PC	120°
--------------------	-----	-------------	-------	-----------	------------	------	---------------------	-----------------------	----	-------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	20W	600x95x80mm	2446lm	1883lm	● 2700K	608612.B.P.C
SMD LED	20W	600x95x80mm	2610lm	2010lm	● 3000K	608613.B.P.C
SMD LED	20W	600x95x80mm	2774lm	2136lm	○ 4000K	608614.B.P.C
SMD LED	20W	600x95x80mm	2881lm	2219lm	○ 5000K	608615.B.P.C
SMD LED	40W	1200x95x80mm	4891lm	3766lm	● 2700K	608622.B.P.C
SMD LED	40W	1200x95x80mm	5220lm	4019lm	● 3000K	608623.B.P.C
SMD LED	40W	1200x95x80mm	5549lm	4273lm	○ 4000K	608624.B.P.C
SMD LED	40W	1200x95x80mm	5763lm	4473lm	○ 5000K	608625.B.P.C
SMD LED	50W	1500x95x80mm	6114lm	4708lm	● 2700K	608632.B.P.C
SMD LED	50W	1500x95x80mm	6525lm	5024lm	● 3000K	608633.B.P.C
SMD LED	50W	1500x95x80mm	6936lm	5341lm	○ 4000K	608634.B.P.C
SMD LED	50W	1500x95x80mm	7204lm	5547lm	○ 5000K	608635.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



White

6087


Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP65



Architectural OUTDOOR



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP65	5 years Warranty	AC100-240V 50/60Hz	CE	Metal-Tempered Glass	120°
--------------------	-----	-------------	-------	-----------	------------	------	---------------------	-----------------------	----	-------------------------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	18W	750x140x90mm	2125lm	1636lm	● 2700K	608712.B.P.C
SMD LED	18W	750x140x90mm	2268lm	1746lm	● 3000K	608713.B.P.C
SMD LED	18W	750x140x90mm	2411lm	1856lm	○ 4000K	608714.B.P.C
SMD LED	18W	750x140x90mm	2504lm	1928lm	○ 5000K	608715.B.P.C
SMD LED	36W	1350x140x90mm	4250lm	3273lm	● 2700K	608722.B.P.C
SMD LED	36W	1350x140x90mm	4536lm	3493lm	● 3000K	608723.B.P.C
SMD LED	36W	1350x140x90mm	4822lm	3713lm	○ 4000K	608724.B.P.C
SMD LED	36W	1350x140x90mm	5008lm	3856lm	○ 5000K	608725.B.P.C
SMD LED	50W	1650x140x90mm	5903lm	4545lm	● 2700K	608732.B.P.C
SMD LED	50W	1650x140x90mm	6300lm	4851lm	● 3000K	608733.B.P.C
SMD LED	50W	1650x140x90mm	6697lm	5157lm	○ 4000K	608734.B.P.C
SMD LED	50W	1650x140x90mm	6955lm	5356lm	○ 5000K	608735.B.P.C
SMD LED	60W	1650x140x90mm	7084lm	5454lm	● 2700K	608742.B.P.C
SMD LED	60W	1650x140x90mm	7560lm	5821lm	● 3000K	608743.B.P.C
SMD LED	60W	1650x140x90mm	8036lm	6188lm	○ 4000K	608744.B.P.C
SMD LED	60W	1650x140x90mm	8346lm	6427lm	○ 5000K	608745.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)




White

6088

Downlight Recessed. Ambience/UGR

TRI-PROOF series


IP65

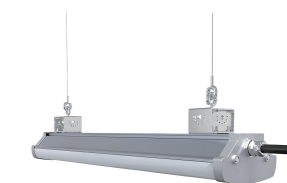

TRI PROOF LIGHT

Customizable high power output, and an adjustable lamp angle, making it suitable for warehouses, factories, logistics centers, subways, and other similar environments.

Is a robust and high-performance tri-proof luminaire designed for industrial and commercial applications. It features an aluminum heat sink.

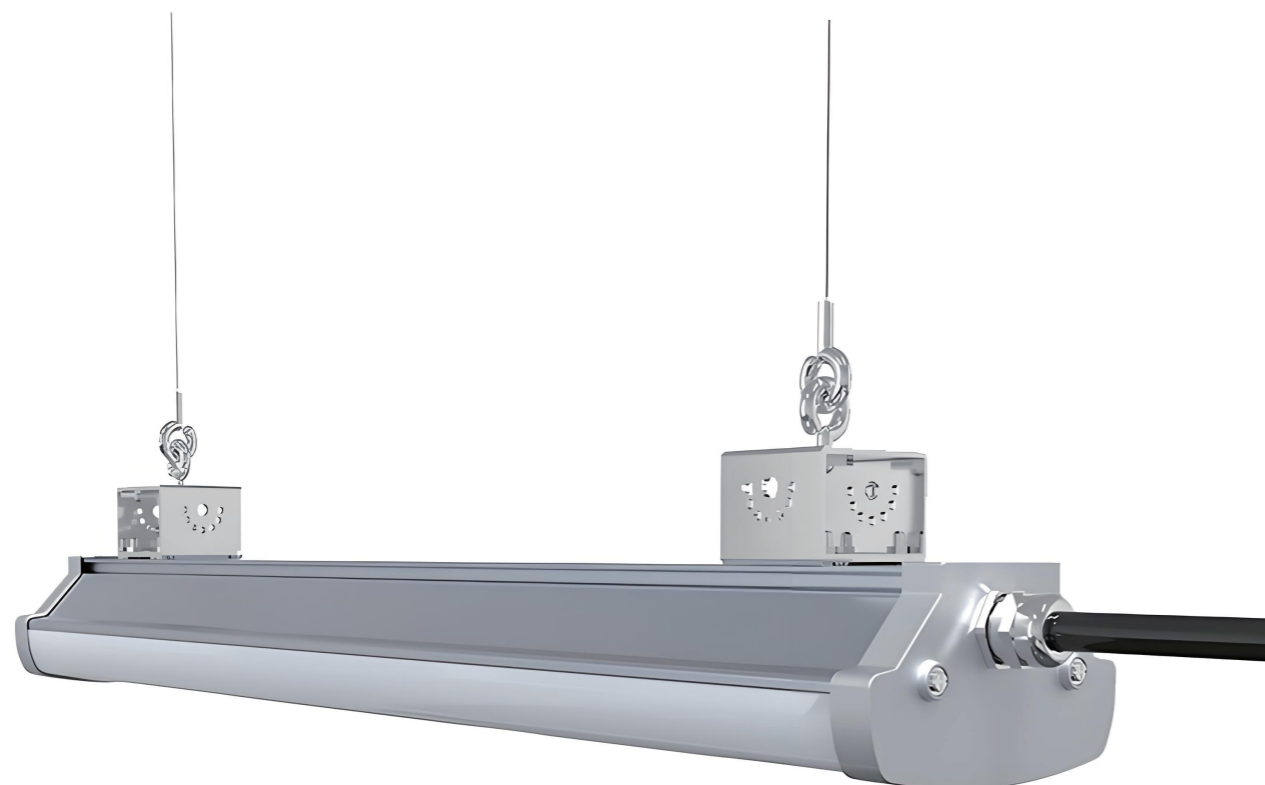

OSRAM 50,000hrs SMD LED LM80 Fixed Ra >90 UGR <19 IP65 5 years Warranty AC100-240V 50/60Hz CE Aluminum+PC 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	40W	600x117x69mm	4824lm	3714lm	● 2700K	608812.B.P.C
SMD LED	40W	600x117x69mm	5148lm	3964lm	● 3000K	608813.B.P.C
SMD LED	40W	600x117x69mm	5472lm	4214lm	○ 4000K	608814.B.P.C
SMD LED	40W	600x117x69mm	5683lm	4376lm	○ 5000K	608815.B.P.C
SMD LED	80W	1000x117x69mm	9445lm	7273lm	● 2700K	608822.B.P.C
SMD LED	80W	1000x117x69mm	10080lm	7762lm	● 3000K	608823.B.P.C
SMD LED	80W	1000x117x69mm	10715lm	8251lm	○ 4000K	608824.B.P.C
SMD LED	80W	1000x117x69mm	11128lm	8569lm	○ 5000K	608825.B.P.C
SMD LED	120W	1200x117x69mm	14167lm	10909lm	● 2700K	608832.B.P.C
SMD LED	120W	1200x117x69mm	15120lm	11642lm	● 3000K	608833.B.P.C
SMD LED	120W	1200x117x69mm	16073lm	12376lm	○ 4000K	608834.B.P.C
SMD LED	120W	1200x117x69mm	16692lm	12853lm	○ 5000K	608835.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



White

6089


Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP65



Architectural OUTDOOR



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP65	5 years Warranty	AC220-240V 50/60Hz	CE	Aluminum+PC	120°
--------------------	-----	-------------	-------	-----------	------------	------	---------------------	-----------------------	----	-------------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	20W	600x85x56mm	2193lm	1688lm	● 2700K	608912.B.P.C
SMD LED	20W	600x85x56mm	2340lm	1802lm	● 3000K	608913.B.P.C
SMD LED	20W	600x85x56mm	2487lm	1915lm	○ 4000K	608914.B.P.C
SMD LED	20W	600x85x56mm	2583lm	1989lm	○ 5000K	608915.B.P.C
Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	40W	1200x85x56mm	4385lm	3377lm	● 2700K	608922.B.P.C
SMD LED	40W	1200x85x56mm	4680lm	3604lm	● 3000K	608923.B.P.C
SMD LED	40W	1200x85x56mm	4975lm	3831lm	○ 4000K	608924.B.P.C
SMD LED	40W	1200x85x56mm	5167lm	3978lm	○ 5000K	608925.B.P.C
Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	60W	1500x85x56mm	6578lm	5065lm	● 2700K	608932.B.P.C
SMD LED	60W	1500x85x56mm	7020lm	5405lm	● 3000K	608933.B.P.C
SMD LED	60W	1500x85x56mm	7462lm	5746lm	○ 4000K	608934.B.P.C
SMD LED	60W	1500x85x56mm	7750lm	5968lm	○ 5000K	608935.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-0n/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



White

6090


Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP65



Architectural OUTDOOR



OSRAM 50,000hrs	SMD	LED LM80	Fixed	Ra >90	UGR <19	IP65	5 years Warranty	AC100-240V 50/60Hz	CE	PC+PC	120°
--------------------	-----	-------------	-------	-----------	------------	------	---------------------	-----------------------	----	-------	------

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	20W	600x84x69mm	2328lm	1792lm	● 2700K	609012.B.P.C
SMD LED	20W	600x84x69mm	2484lm	1913lm	● 3000K	609013.B.P.C
SMD LED	20W	600x84x69mm	2640lm	2033lm	○ 4000K	609014.B.P.C
SMD LED	20W	600x84x69mm	2742lm	2112lm	○ 5000K	609015.B.P.C
Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	40W	1200x84x69mm	4655lm	3584lm	● 2700K	609022.B.P.C
SMD LED	40W	1200x84x69mm	4968lm	3825lm	● 3000K	609023.B.P.C
SMD LED	40W	1200x84x69mm	5281lm	4066lm	○ 4000K	609024.B.P.C
SMD LED	40W	1200x84x69mm	5485lm	4223lm	○ 5000K	609025.B.P.C
Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	60W	1500x84x69mm	6983lm	5377lm	● 2700K	609032.B.P.C
SMD LED	60W	1500x84x69mm	7452lm	5738lm	● 3000K	609033.B.P.C
SMD LED	60W	1500x84x69mm	7921lm	6100lm	○ 4000K	609034.B.P.C
SMD LED	60W	1500x84x69mm	8227lm	6335lm	○ 5000K	609035.B.P.C


Beam Angle: B(1-120°)

Power Supply: P(1-0n/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



White

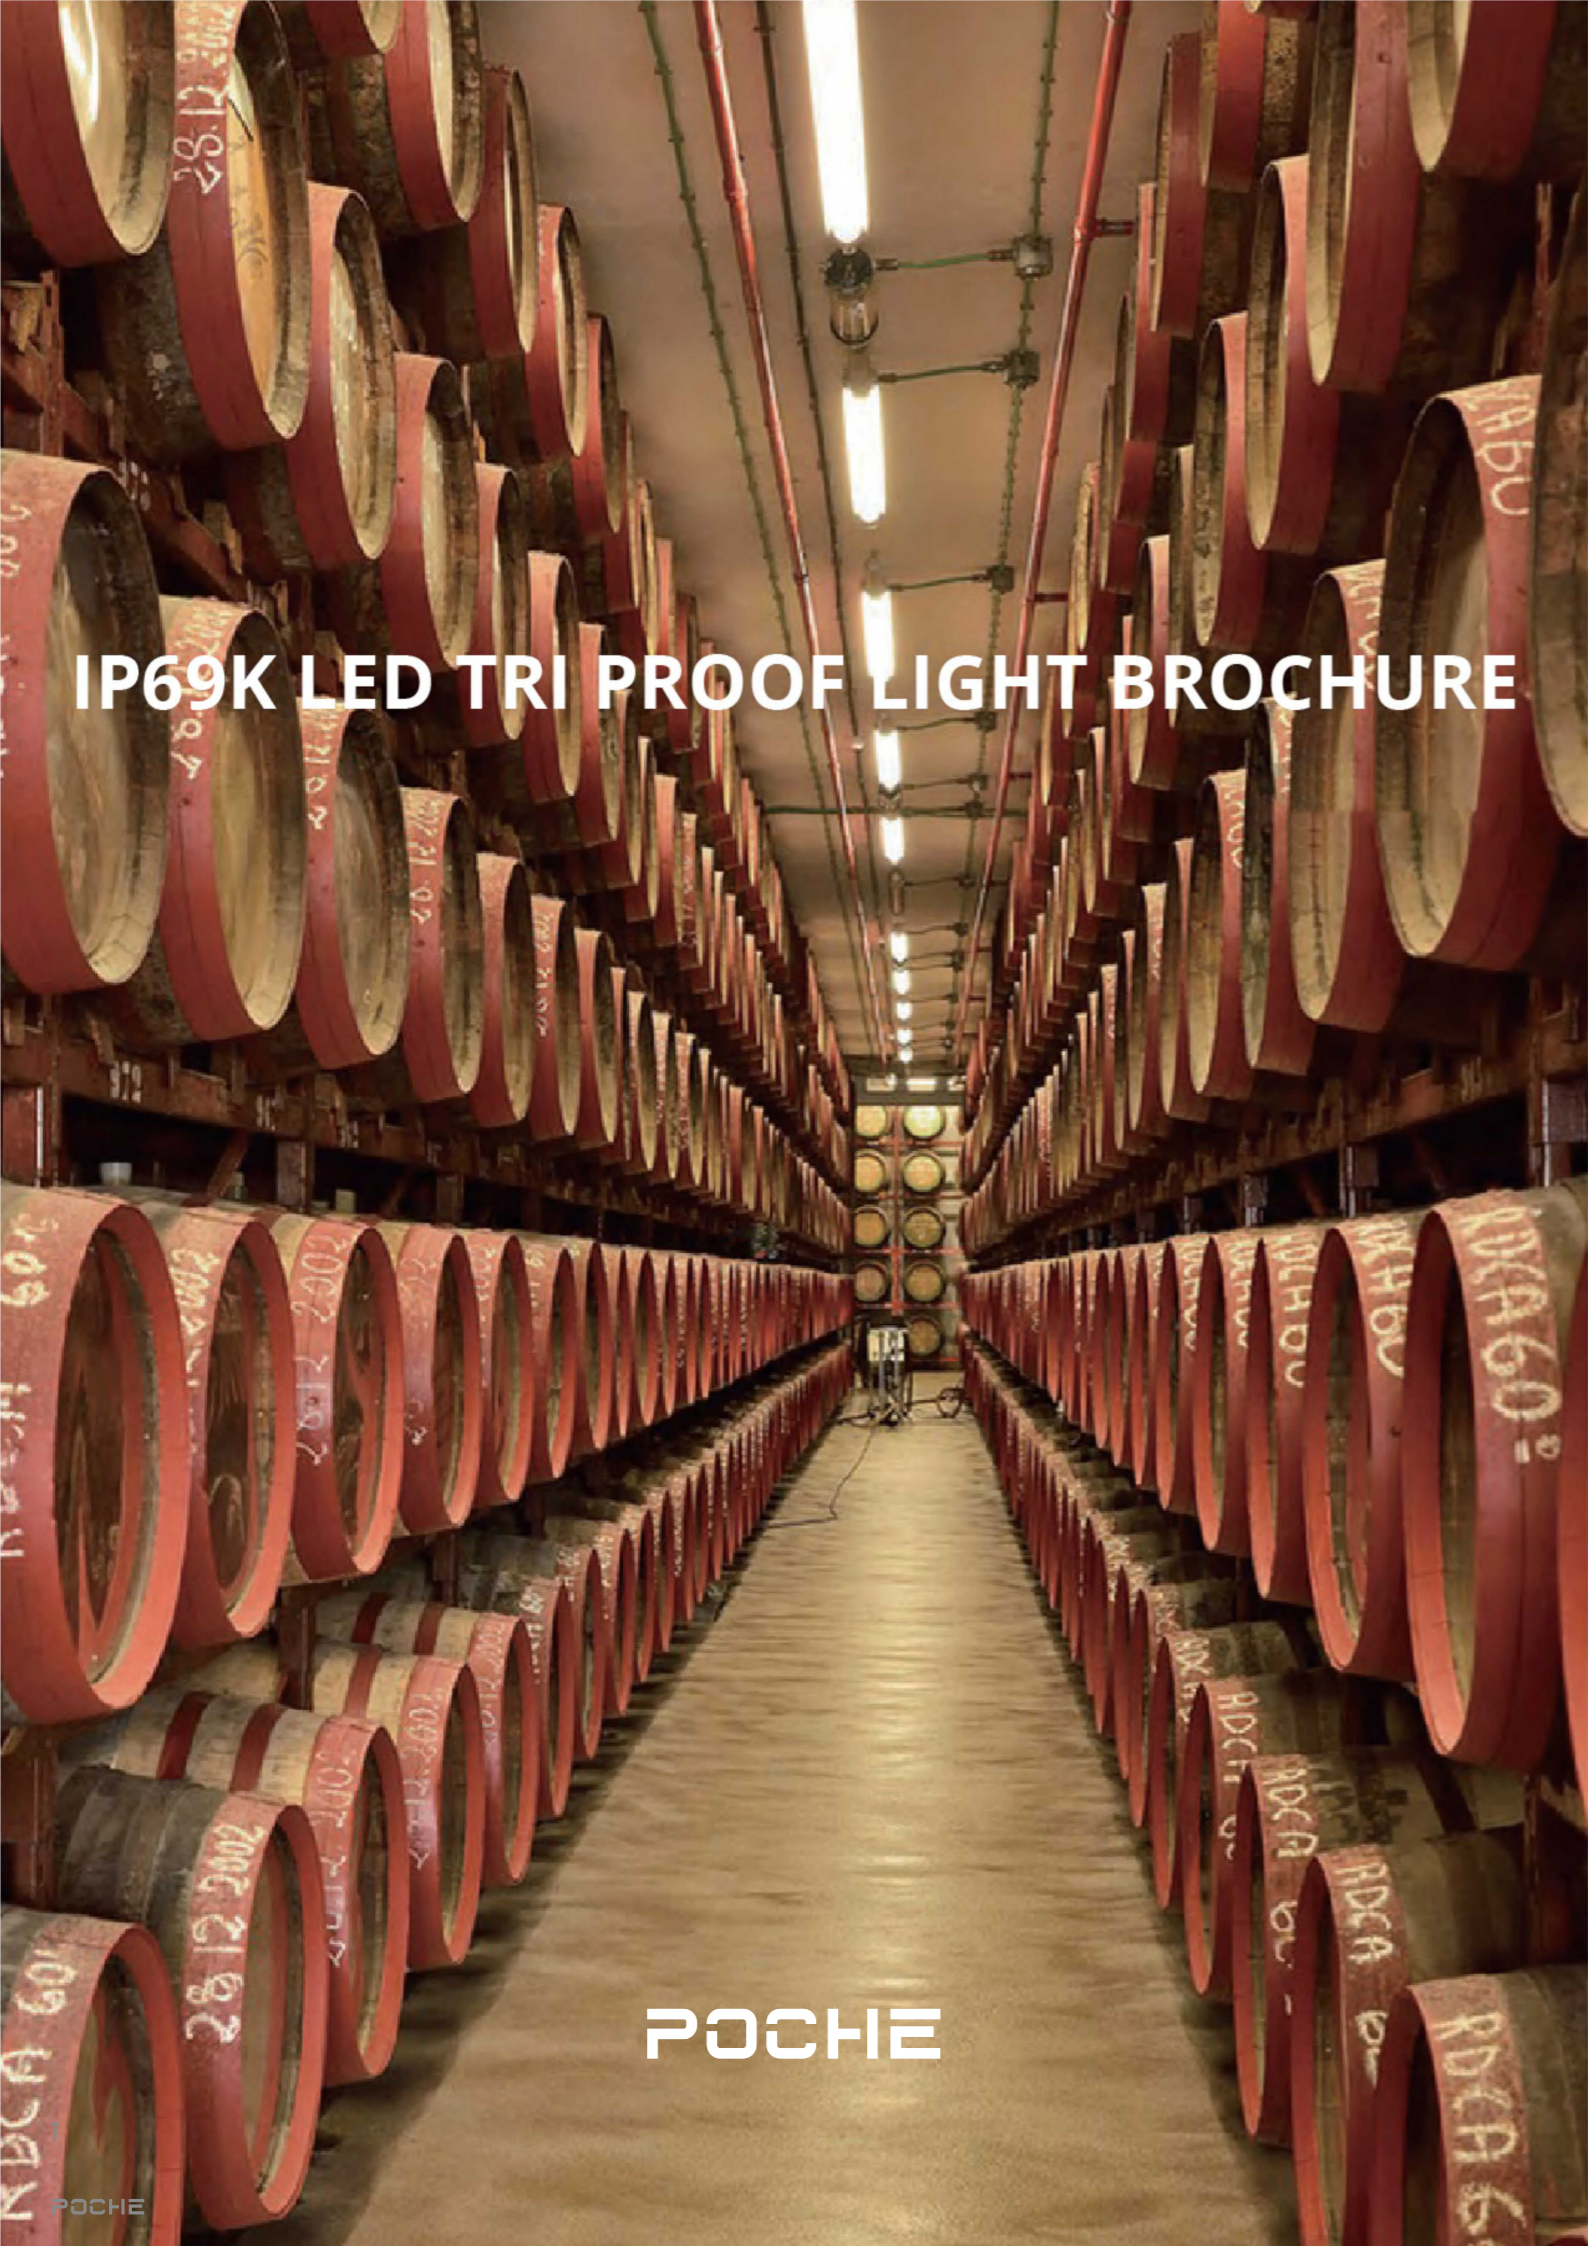

IP69K LED TRI PROOF LIGHT BROCHURE

POCHE


Architectural OUTDOOR

6091

Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP67

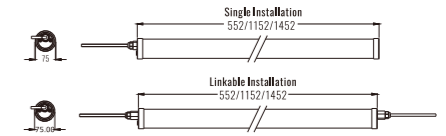


OSRAM 50,000hrs SMD LED LM80 Fixed Ra >90 UGR <19 IP67 5 years Warranty AC100-277V 50/60Hz CE Stainless Steel+Glass +High Borosilicate 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	20W	∅75x552mm	2108lm	1623lm	● 2700K	609112.B.P.C
SMD LED	20W	∅75x552mm	2250lm	1733lm	● 3000K	609113.B.P.C
SMD LED	20W	∅75x552mm	2392lm	1842lm	○ 4000K	609114.B.P.C
SMD LED	20W	∅75x552mm	2484lm	1913lm	○ 5000K	609115.B.P.C
SMD LED	40W	∅75x1152mm	4217lm	3247lm	● 2700K	609122.B.P.C
SMD LED	40W	∅75x1152mm	4500lm	3465lm	● 3000K	609123.B.P.C
SMD LED	40W	∅75x1152mm	4784lm	3683lm	○ 4000K	609124.B.P.C
SMD LED	40W	∅75x1152mm	4968lm	3825lm	○ 5000K	609125.B.P.C
SMD LED	50W	∅175x1452mm	5271lm	4058lm	● 2700K	609132.B.P.C
SMD LED	50W	∅175x1452mm	5625lm	4331lm	● 3000K	609133.B.P.C
SMD LED	50W	∅175x1452mm	5979lm	4604lm	○ 4000K	609134.B.P.C
SMD LED	50W	∅175x1452mm	6210lm	4782lm	○ 5000K	609135.B.P.C
SMD LED	60W	∅175x1452mm	6325lm	4870lm	● 2700K	609142.B.P.C
SMD LED	60W	∅175x1452mm	6750lm	5198lm	● 3000K	609143.B.P.C
SMD LED	60W	∅175x1452mm	7175lm	5525lm	○ 4000K	609144.B.P.C
SMD LED	60W	∅175x1452mm	7452lm	5738lm	○ 5000K	609145.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-0n/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)




6092

Downlight Recessed. Ambience/UGR

TRI-PROOF series



IP67



ADJUSTABLE 80° - 120° TRI PROOF LIGHT TF SERIES -Grid type

- IP67 & IP69K
- PMMA IK08 / PC IK10
- Against water pressure of 100bar (1450psi) and temperature of 80 C
- System efficiency up to 60Lm/W
- High CRI>80
- Environmentally friendly, no mercury, no UV, no IR

- Environmentally friendly, no mercury, no UV, no IR
- Wide beam angle 80*120°
- Quick start instant 100% luminous flux
- 5 years warranty
- Certificate: CE, RoHS certified
- Surface mount or suspended

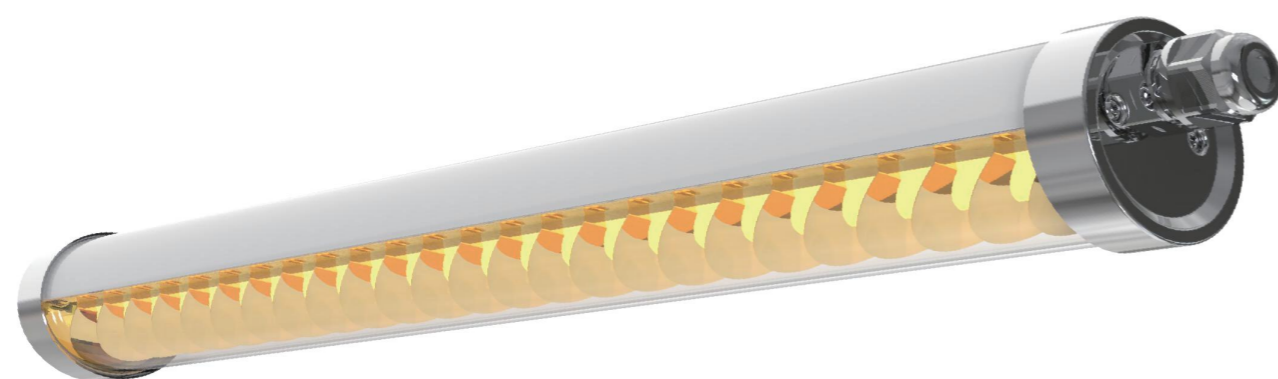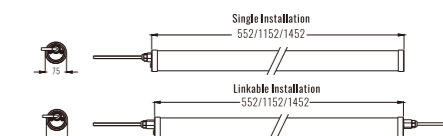


OSRAM 50,000hrs SMD LED LM80 Fixed Ra >80 UGR <19 IP67 5 years Warranty AC100-277V 50/60Hz CE Stainless Steel+PC 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	20W	∅75x552mm	1434lm	1104lm	● 2700K	609212.B.P.C
SMD LED	20W	∅75x552mm	1530lm	1178lm	● 3000K	609213.B.P.C
SMD LED	20W	∅75x552mm	1626lm	1252lm	● 4000K	609214.B.P.C
SMD LED	20W	∅75x552mm	1689lm	1301lm	● 5000K	609215.B.P.C
SMD LED	40W	∅75x1152mm	2867lm	2208lm	● 2700K	609222.B.P.C
SMD LED	40W	∅75x1152mm	3060lm	2356lm	● 3000K	609223.B.P.C
SMD LED	40W	∅75x1152mm	3253lm	2505lm	● 4000K	609224.B.P.C
SMD LED	40W	∅75x1152mm	3378lm	2601lm	● 5000K	609225.B.P.C
SMD LED	50W	∅175x1452mm	3584lm	2760lm	● 2700K	609232.B.P.C
SMD LED	50W	∅175x1452mm	3825lm	2945lm	● 3000K	609233.B.P.C
SMD LED	50W	∅175x1452mm	4066lm	3131lm	● 4000K	609234.B.P.C
SMD LED	50W	∅175x1452mm	4223lm	3252lm	● 5000K	609235.B.P.C
SMD LED	60W	∅175x1452mm	4301lm	3312lm	● 2700K	609242.B.P.C
SMD LED	60W	∅175x1452mm	4590lm	3534lm	● 3000K	609243.B.P.C
SMD LED	60W	∅175x1452mm	4879lm	3757lm	● 4000K	609244.B.P.C
SMD LED	60W	∅175x1452mm	5067lm	3902lm	● 5000K	609245.B.P.C

Beam Angle: B(1-80X120°)

Power Supply: P(1-0n/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



6093


Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP67



Architectural OUTDOOR

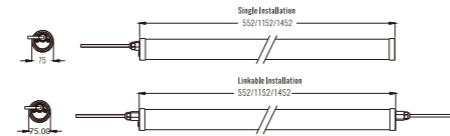


OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >90 | UGR <16 | IP67 | 5 years Warranty | AC100-277V 50/60Hz | CE | Stainless Steel+PC | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	20W	∅75x552mm	2361lm	1818lm	● 2700K	609312.B.P.C
SMD LED	20W	∅75x552mm	2520lm	1940lm	● 3000K	609313.B.P.C
SMD LED	20W	∅75x552mm	2679lm	2063lm	○ 4000K	609314.B.P.C
SMD LED	20W	∅75x552mm	2782lm	2142lm	○ 5000K	609315.B.P.C
SMD LED	40W	∅75x1152mm	4722lm	3636lm	● 2700K	609322.B.P.C
SMD LED	40W	∅75x1152mm	5040lm	3881lm	● 3000K	609323.B.P.C
SMD LED	40W	∅75x1152mm	5358lm	4125lm	○ 4000K	609324.B.P.C
SMD LED	40W	∅75x1152mm	5564lm	4284lm	○ 5000K	609325.B.P.C
SMD LED	50W	∅175x1452mm	5903lm	4545lm	● 2700K	609332.B.P.C
SMD LED	50W	∅175x1452mm	6300lm	4851lm	● 3000K	609333.B.P.C
SMD LED	50W	∅175x1452mm	6697lm	5157lm	○ 4000K	609334.B.P.C
SMD LED	50W	∅175x1452mm	6955lm	5356lm	○ 5000K	609335.B.P.C
SMD LED	60W	∅175x1452mm	7084lm	5454lm	● 2700K	609342.B.P.C
SMD LED	60W	∅175x1452mm	7560lm	5821lm	● 3000K	609343.B.P.C
SMD LED	60W	∅175x1452mm	8036lm	6188lm	○ 4000K	609344.B.P.C
SMD LED	60W	∅175x1452mm	8346lm	6427lm	○ 5000K	609345.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



6094


Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP67



Architectural OUTDOOR

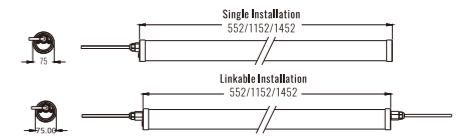


OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >90 | UGR <19 | IP67 | 5 years Warranty | AC100-277V 50/60Hz | CE | Stainless Steel+PC | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	20W	∅75x552mm	2530lm	1948lm	● 2700K	609412.B.P.C
SMD LED	20W	∅75x552mm	2700lm	2079lm	● 3000K	609413.B.P.C
SMD LED	20W	∅75x552mm	2870lm	2210lm	○ 4000K	609414.B.P.C
SMD LED	20W	∅75x552mm	2981lm	2295lm	○ 5000K	609415.B.P.C
SMD LED	40W	∅75x1152mm	4891lm	3766lm	● 2700K	609422.B.P.C
SMD LED	40W	∅75x1152mm	5220lm	4019lm	● 3000K	609423.B.P.C
SMD LED	40W	∅75x1152mm	5549lm	4273lm	○ 4000K	609424.B.P.C
SMD LED	40W	∅75x1152mm	5763lm	4437lm	○ 5000K	609425.B.P.C
SMD LED	50W	∅175x1452mm	6114lm	4708lm	● 2700K	609432.B.P.C
SMD LED	50W	∅175x1452mm	6525lm	5024lm	● 3000K	609433.B.P.C
SMD LED	50W	∅175x1452mm	6936lm	5341lm	○ 4000K	609434.B.P.C
SMD LED	50W	∅175x1452mm	7204lm	5547lm	○ 5000K	609435.B.P.C
SMD LED	60W	∅175x1452mm	7337lm	5649lm	● 2700K	609442.B.P.C
SMD LED	60W	∅175x1452mm	7830lm	6029lm	● 3000K	609443.B.P.C
SMD LED	60W	∅175x1452mm	8323lm	6409lm	○ 4000K	609444.B.P.C
SMD LED	60W	∅175x1452mm	8644lm	6656lm	○ 5000K	609445.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



6095


Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP67



Architectural OUTDOOR

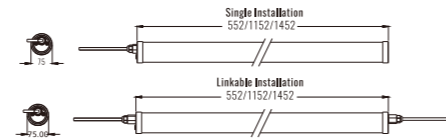


OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >90 | UGR <19 | IP67 | 5 years Warranty | AC100-277V 50/60Hz | CE | Stainless Steel+PC | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	20W	∅75x552mm	928lm	714lm	● 2700K	609512.B.P.C
SMD LED	20W	∅75x552mm	990lm	762lm	● 3000K	609513.B.P.C
SMD LED	20W	∅75x552mm	1052lm	810lm	○ 4000K	609514.B.P.C
SMD LED	20W	∅75x552mm	1093lm	842lm	○ 5000K	609515.B.P.C
SMD LED	40W	∅75x1152mm	1855lm	1429lm	● 2700K	609522.B.P.C
SMD LED	40W	∅75x1152mm	1980lm	1525lm	● 3000K	609523.B.P.C
SMD LED	40W	∅75x1152mm	2105lm	1621lm	○ 4000K	609524.B.P.C
SMD LED	40W	∅75x1152mm	2186lm	1683lm	○ 5000K	609525.B.P.C
SMD LED	50W	∅175x1452mm	2319lm	1786lm	● 2700K	609532.B.P.C
SMD LED	50W	∅175x1452mm	2475lm	1906lm	● 3000K	609533.B.P.C
SMD LED	50W	∅175x1452mm	2631lm	2026lm	○ 4000K	609534.B.P.C
SMD LED	50W	∅175x1452mm	2732lm	2104lm	○ 5000K	609535.B.P.C
SMD LED	60W	∅175x1452mm	2783lm	2143lm	● 2700K	609542.B.P.C
SMD LED	60W	∅175x1452mm	2970lm	2287lm	● 3000K	609543.B.P.C
SMD LED	60W	∅175x1452mm	3157lm	2431lm	○ 4000K	609544.B.P.C
SMD LED	60W	∅175x1452mm	3279lm	2525lm	○ 5000K	609545.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)



6096


Downlight Recessed. Ambience/UGR

TRI-PROOF series

IP65



Architectural OUTDOOR



OSRAM 50,000hrs | SMD | LED LM80 | Fixed | Ra >90 | UGR <19 | IP65 | 5 years Warranty | AC100-240V 50/60Hz | CE | PC+PC | 120°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	18W	600x73x63mm	2201lm	1695lm	● 2700K	609612.B.P.C
SMD LED	18W	600x73x63mm	2349lm	1809lm	● 3000K	609613.B.P.C
SMD LED	18W	600x73x63mm	2497lm	1923lm	○ 4000K	609614.B.P.C
SMD LED	18W	600x73x63mm	2593lm	1997lm	○ 5000K	609615.B.P.C
SMD LED	36W	1200x73x63mm	4402lm	3390lm	● 2700K	609622.B.P.C
SMD LED	36W	1200x73x63mm	4698lm	3617lm	● 3000K	609623.B.P.C
SMD LED	36W	1200x73x63mm	4994lm	3845lm	○ 4000K	609624.B.P.C
SMD LED	36W	1200x73x63mm	5187lm	3994lm	○ 5000K	609625.B.P.C
SMD LED	40W	1500x73x63mm	4891lm	3766lm	● 2700K	609632.B.P.C
SMD LED	40W	1500x73x63mm	5220lm	4019lm	● 3000K	609633.B.P.C
SMD LED	40W	1500x73x63mm	5549lm	4273lm	○ 4000K	609634.B.P.C
SMD LED	40W	1500x73x63mm	5763lm	4437lm	○ 5000K	609635.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-White)

