

WALL MOUNT

---



WALL MOUNT 7030  
7W/10W/15W  
P.2



WALL MOUNT 7032  
1\*15W/1\*20W/1\*30W  
P.3



WALL MOUNT 7034  
7W/10W/15W  
P.4



WALL MOUNT 7036  
1\*15W/1\*20W/1\*30W  
P.5



WALL MOUNT 7031  
2\*5W/2\*7W  
P.6



WALL MOUNT 7033  
2\*10W/2\*15W  
P.7



WALL MOUNT 7035  
2\*5W/2\*7W  
P.8



WALL MOUNT 7037  
2\*10W/2\*15W  
P.9



WALL MOUNT 7038  
2\*5W/2\*6W  
P.12



WALL MOUNT 7039  
1\*5W  
P.13



WALL MOUNT 7040  
2\*5W  
P.14



WALL MOUNT 7041  
2\*6W  
P.15



WALL MOUNT 7042  
2\*6W  
P.16



WALL MOUNT 7043  
1\*6W  
P.17



WALL MOUNT 7044  
2\*6W  
P.18



WALL MOUNT 7045  
2\*5W  
P.19

# LED WALL LIGHT BROCHURE

POCHE



Architectural OUTDOOR

7030

Downlight Recessed. Ambience/UGR

WALL MOUNT series

IP65

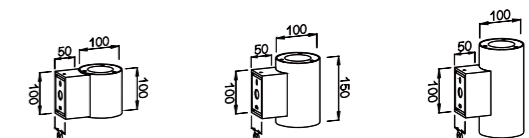

OSRAM 50,000hrs COB LED LM80 Fixed Ra >90 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 12° 24° 36° 40°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	1x7W	ø100x100mm	708lm	545lm	● 2700K	703012.B.P.C
COB LED	1x7W	ø100x100mm	756lm	582lm	● 3000K	703013.B.P.C
COB LED	1x7W	ø100x100mm	804lm	619lm	● 4000K	703014.B.P.C
COB LED	1x7W	ø100x100mm	835lm	643lm	● 5000K	703015.B.P.C
COB LED	1x10W	ø100x150mm	1012lm	779lm	● 2700K	703022.B.P.C
COB LED	1x10W	ø100x150mm	1080lm	832lm	● 3000K	703023.B.P.C
COB LED	1x10W	ø100x150mm	1148lm	884lm	● 4000K	703024.B.P.C
COB LED	1x10W	ø100x150mm	1192lm	918lm	● 5000K	703025.B.P.C
COB LED	1x15W	ø100x200mm	1518lm	1169lm	● 2700K	703032.B.P.C
COB LED	1x15W	ø100x200mm	1620lm	1247lm	● 3000K	703033.B.P.C
COB LED	1x15W	ø100x200mm	1722lm	1326lm	● 4000K	703034.B.P.C
COB LED	1x15W	ø100x200mm	1788lm	1377lm	● 5000K	703035.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-40°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



# 7031



Downlight Recessed. Ambience/UGR

WALL MOUNT series

IP65



## Architectural OUTDOOR

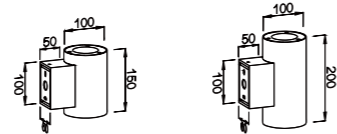


OSRAM 50,000hrs COB LED LM80 Fixed Ra >90 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 12° 24° 36° 40°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2x5W	∅100x150mm	1012lm	779lm	● 2700K	703112.B.P.C
COB LED	2x5W	∅100x150mm	1080lm	832lm	● 3000K	703113.B.P.C
COB LED	2x5W	∅100x150mm	1148lm	884lm	○ 4000K	703114.B.P.C
COB LED	2x5W	∅100x150mm	1192lm	918lm	○ 5000K	703115.B.P.C
COB LED	2x7W	∅100x200mm	1417lm	1091lm	● 2700K	703122.B.P.C
COB LED	2x7W	∅100x200mm	1512lm	1164lm	● 3000K	703123.B.P.C
COB LED	2x7W	∅100x200mm	1607lm	1238lm	○ 4000K	703124.B.P.C
COB LED	2x7W	∅100x200mm	1669lm	1285lm	○ 5000K	703125.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-40°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



# 7032



Downlight Recessed. Ambience/UGR

WALL MOUNT series

IP65



## Architectural OUTDOOR

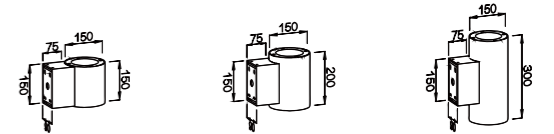

OSRAM 50,000hrs COB LED LM80 Fixed Ra >90 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 12° 24° 36° 40°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	1x15W	∅150x150mm	1518lm	1169lm	● 2700K	703212.B.P.C
COB LED	1x15W	∅150x150mm	1620lm	1247lm	● 3000K	703213.B.P.C
COB LED	1x15W	∅150x150mm	1722lm	1326lm	○ 4000K	703214.B.P.C
COB LED	1x15W	∅150x150mm	1788lm	1377lm	○ 5000K	703215.B.P.C
COB LED	1x20W	∅150x200mm	2024lm	1558lm	● 2700K	703222.B.P.C
COB LED	1x20W	∅150x200mm	2160lm	1663lm	● 3000K	703223.B.P.C
COB LED	1x20W	∅150x200mm	2296lm	1768lm	○ 4000K	703224.B.P.C
COB LED	1x20W	∅150x200mm	2385lm	1836lm	○ 5000K	703225.B.P.C
COB LED	1x30W	∅150x300mm	2909lm	2240lm	● 2700K	703222.B.P.C
COB LED	1x30W	∅150x300mm	3105lm	2391lm	● 3000K	703223.B.P.C
COB LED	1x30W	∅150x300mm	3301lm	2541lm	○ 4000K	703224.B.P.C
COB LED	1x30W	∅150x300mm	3428lm	2639lm	○ 5000K	703225.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-40°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



# 7033



Downlight Recessed. Ambience/UGR

WALL MOUNT series

IP65



## Architectural OUTDOOR

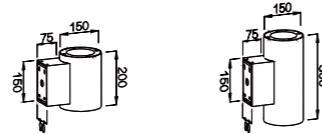


OSRAM 50,000hrs COB LED LM80 Fixed Ra >90 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 12° 24° 36° 40°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2x10W	∅150x200mm	2024lm	1558lm	● 2700K	703312.B.P.C
COB LED	2x10W	∅150x200mm	2160lm	1663lm	● 3000K	703313.B.P.C
COB LED	2x10W	∅150x200mm	2296lm	1768lm	○ 4000K	703314.B.P.C
COB LED	2x10W	∅150x200mm	2385lm	1836lm	○ 5000K	703315.B.P.C
COB LED	2x15W	∅150x300mm	2909lm	2240lm	● 2700K	703322.B.P.C
COB LED	2x15W	∅150x300mm	3105lm	2391lm	● 3000K	703323.B.P.C
COB LED	2x15W	∅150x300mm	3301lm	2541lm	○ 4000K	703324.B.P.C
COB LED	2x15W	∅150x300mm	3428lm	2639lm	○ 5000K	703325.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-40°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



# 7034


Downlight Recessed. Ambience/UGR

WALL MOUNT series

IP65



## Architectural OUTDOOR

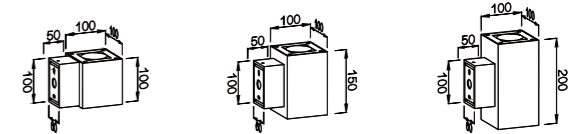


OSRAM 50,000hrs COB LED LM80 Fixed Ra >90 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 12° 24° 36° 40°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	1x7W	100x100x100mm	708lm	545lm	● 2700K	703412.B.P.C
COB LED	1x7W	100x100x100mm	756lm	582lm	● 3000K	703413.B.P.C
COB LED	1x7W	100x100x100mm	804lm	619lm	○ 4000K	703414.B.P.C
COB LED	1x7W	100x100x100mm	835lm	643lm	○ 5000K	703415.B.P.C
COB LED	1x10W	100x100x150mm	1012lm	779lm	● 2700K	703422.B.P.C
COB LED	1x10W	100x100x150mm	1080lm	832lm	● 3000K	703423.B.P.C
COB LED	1x10W	100x100x150mm	1148lm	884lm	○ 4000K	703424.B.P.C
COB LED	1x10W	100x100x150mm	1192lm	918lm	○ 5000K	703425.B.P.C
COB LED	1x15W	100x100x200mm	1455lm	1120lm	● 2700K	703432.B.P.C
COB LED	1x15W	100x100x200mm	1553lm	1195lm	● 3000K	703433.B.P.C
COB LED	1x15W	100x100x200mm	1650lm	1271lm	○ 4000K	703434.B.P.C
COB LED	1x15W	100x100x200mm	1714lm	1320lm	○ 5000K	703435.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-40°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



# 7035



Downlight Recessed. Ambience/UGR

WALL MOUNT series

IP65



# Architectural OUTDOOR

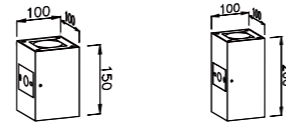


OSRAM 50,000hrs | COB | LED LM80 | Fixed | Ra >90 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 12° 24° 36° 60°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2x5W	100x100x150mm	1012lm	779lm	● 2700K	703512.B.P.C
COB LED	2x5W	100x100x150mm	1080lm	832lm	● 3000K	703513.B.P.C
COB LED	2x5W	100x100x150mm	1148lm	884lm	○ 4000K	703514.B.P.C
COB LED	2x5W	100x100x150mm	1192lm	918lm	○ 5000K	703515.B.P.C
COB LED	2x7W	100x100x200mm	1122lm	864lm	● 2700K	703522.B.P.C
COB LED	2x7W	100x100x200mm	1197lm	922lm	● 3000K	703523.B.P.C
COB LED	2x7W	100x100x200mm	1272lm	980lm	○ 4000K	703524.B.P.C
COB LED	2x7W	100x100x200mm	1321lm	1018lm	○ 5000K	703525.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-40°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



# 7036



Downlight Recessed. Ambience/UGR

WALL MOUNT series

IP65



# Architectural OUTDOOR

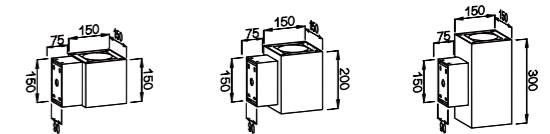


OSRAM 50,000hrs | COB | LED LM80 | Fixed | Ra >90 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 12° 24° 36° 40°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	1x15W	150x150x150mm	1455lm	1120lm	● 2700K	703612.B.P.C
COB LED	1x15W	150x150x150mm	1553lm	1195lm	● 3000K	703613.B.P.C
COB LED	1x15W	150x150x150mm	1650lm	1271lm	○ 4000K	703614.B.P.C
COB LED	1x15W	150x150x150mm	1714lm	1320lm	○ 5000K	703615.B.P.C
COB LED	1x20W	150x150x200mm	2024lm	1558lm	● 2700K	703622.B.P.C
COB LED	1x20W	150x150x200mm	2160lm	1663lm	● 3000K	703623.B.P.C
COB LED	1x20W	150x150x200mm	2296lm	1768lm	○ 4000K	703624.B.P.C
COB LED	1x20W	150x150x200mm	2385lm	1836lm	○ 5000K	703625.B.P.C
COB LED	1x30W	150x150x300mm	2909lm	2240lm	● 2700K	703732.B.P.C
COB LED	1x30W	150x150x300mm	3105lm	2391lm	● 3000K	703733.B.P.C
COB LED	1x30W	150x150x300mm	3301lm	2541lm	○ 4000K	703734.B.P.C
COB LED	1x30W	150x150x300mm	3428lm	2639lm	○ 5000K	703735.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-40°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)





7037

Downlight Recessed. Ambience/UGR

WALL MOUNT series

IP65  


Architectural OUTDOOR

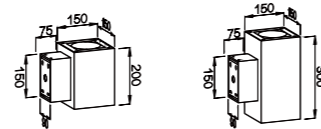















Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2x10W	150x150x200mm	2155lm	1616lm	● 2700K	703712.B.P.C
COB LED	2x10W	150x150x200mm	2300lm	1725lm	● 3000K	703713.B.P.C
COB LED	2x10W	150x150x200mm	2445lm	1834lm	○ 4000K	703714.B.P.C
COB LED	2x10W	150x150x200mm	2539lm	1904lm	○ 5000K	703715.B.P.C
COB LED	2x15W	150x150x300mm	3233lm	2424lm	● 2700K	703722.B.P.C
COB LED	2x15W	150x150x300mm	3450lm	2588lm	● 3000K	703723.B.P.C
COB LED	2x15W	150x150x300mm	3607lm	2751lm	○ 4000K	703724.B.P.C
COB LED	2x15W	150x150x300mm	3809lm	2857lm	○ 5000K	703725.B.P.C

Beam Angle: B(1-12° 2-24° 3-36° 4-40°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



**Waterproof**  
Wall Light

# IP65

Touchless control  
Not available for outdoor use




Architectural OUTDOOR

7038

Downlight Recessed. Ambience/UGR

WALL MOUNT series

IP65

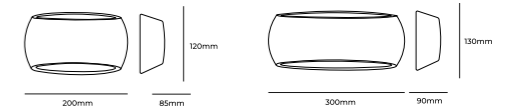

OSRAM 50,000hrs COB LED LM80 Fixed Ra >90 UGR <19 IP65 5 years Warranty AC220-240V 50/60Hz CE Die-cast Aluminum Heatsink 100%

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2x5W	200x120x85mm	1031lm	773lm	● 2700K	703812.B.P.C
COB LED	2x5W	200x120x85mm	1100lm	825lm	● 3000K	703813.B.P.C
COB LED	2x5W	200x120x85mm	1169lm	877lm	● 4000K	703814.B.P.C
COB LED	2x5W	200x120x85mm	1214lm	911lm	● 5000K	703815.B.P.C
COB LED	2x6W	300x130x90mm	1237lm	928lm	● 2700K	703822.B.P.C
COB LED	2x6W	300x130x90mm	1320lm	990lm	● 3000K	703823.B.P.C
COB LED	2x6W	300x130x90mm	1403lm	1052lm	● 4000K	703824.B.P.C
COB LED	2x6W	300x130x90mm	1457lm	1093lm	● 5000K	703825.B.P.C

Beam Angle: B(1-100°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-White 3-Grey)



# 7039


Downlight Recessed. Ambience/UGR

WALL MOUNT series

IP65



## Architectural OUTDOOR



OSRAM 50,000hrs | SMD LED LM80 | Adj. | Ra >90 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 24° 36°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	1x5W	80x80x125mm	443lm	341lm	● 2700K	703912.B.P.C
SMD LED	1x5W	80x80x125mm	473lm	364lm	● 3000K	703913.B.P.C
SMD LED	1x5W	80x80x125mm	502lm	387lm	○ 4000K	703914.B.P.C
SMD LED	1x5W	80x80x125mm	522lm	402lm	○ 5000K	703915.B.P.C

Beam Angle: B(1-24°2-36°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black)



Black



# 7040


Downlight Recessed. Ambience/UGR

WALL MOUNT series

IP65



## Architectural OUTDOOR



OSRAM 50,000hrs | SMD LED LM80 | Adj. | Ra >90 | UGR <19 | IP65 | 5 years Warranty | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink | 24° 36°

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	2x5W	∅63x175mm	885lm	682lm	● 2700K	704012.B.P.C
SMD LED	2x5W	∅63x175mm	945lm	728lm	● 3000K	704013.B.P.C
SMD LED	2x5W	∅63x175mm	1005lm	773lm	○ 4000K	704014.B.P.C
SMD LED	2x5W	∅63x175mm	1043lm	803lm	○ 5000K	704015.B.P.C

Beam Angle: B(1-24°2-36°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



Black



Grey




# 7041

Downlight Recessed. Ambience/UGR

**WALL MOUNT**series

**IP65**  


## ArchitecturalOUTDOOR

















Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	6W	Ø80x125mm	587lm	470lm	● 2700K	704112.B.P.C
SMD LED	6W	Ø80x125mm	627lm	502lm	● 3000K	704113.B.P.C
SMD LED	6W	Ø80x125mm	669lm	533lm	○ 4000K	704114.B.P.C
SMD LED	6W	Ø80x125mm	692lm	554lm	○ 5000K	704115.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)




# 7042

Downlight Recessed. Ambience/UGR

**WALL MOUNT**series

**IP65**  


## ArchitecturalOUTDOOR

















Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	2x6W	Ø80x192mm	1122lm	897lm	● 2700K	704212.B.P.C
SMD LED	2x6W	Ø80x192mm	1197lm	958lm	● 3000K	704213.B.P.C
SMD LED	2x6W	Ø80x192mm	1272lm	1018lm	○ 4000K	704214.B.P.C
SMD LED	2x6W	Ø80x192mm	1321lm	1057lm	○ 5000K	704215.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



# 7043


Downlight Recessed. Ambience/UGR

WALL MOUNT series

IP65



## Architectural OUTDOOR




OSRAM 50,000hrs | SMD | LED LM80 | | Ra >90 | UGR <19 | IP65 | | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink |

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	6W	65x65x125mm	561lm	449lm	● 2700K	704312.B.P.C
SMD LED	6W	65x65x125mm	599lm	479lm	● 3000K	704313.B.P.C
SMD LED	6W	65x65x125mm	636lm	509lm	○ 4000K	704314.B.P.C
SMD LED	6W	65x65x125mm	661lm	529lm	○ 5000K	704315.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



# 7044


Downlight Recessed. Ambience/UGR

WALL MOUNT series

IP65



## Architectural OUTDOOR



OSRAM 50,000hrs | SMD | LED LM80 | | Ra >90 | UGR <19 | IP65 | | AC220-240V 50/60Hz | CE | Die-cast Aluminum Heatsink |

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
SMD LED	2x6W	Ø65x192mm	1122lm	897lm	● 2700K	704412.B.P.C
SMD LED	2x6W	Ø65x192mm	1197lm	958lm	● 3000K	704413.B.P.C
SMD LED	2x6W	Ø65x192mm	1272lm	1018lm	○ 4000K	704414.B.P.C
SMD LED	2x6W	Ø65x192mm	1321lm	1057lm	○ 5000K	704415.B.P.C

Beam Angle: B(1-120°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)



# Architectural OUTDOOR

7045

Downlight Recessed. Ambience/UGR

WALL MOUNT series

IP65



<b>OSRAM</b> 50,000hrs	COB	LED LM80		Ra >90	UGR <19	<b>IP65</b>		AC220-240V 50/60Hz	<b>CE</b>	Die-cast Aluminum Heatsink		
---------------------------	-----	-------------	--	-----------	------------	-------------	--	-----------------------	-----------	-------------------------------	--	--

Light Source	Power	Size	Source Lumens	System Lumens	CCT	Code
COB LED	2x5W	Ø80x180mm	885lm	682lm	● 2700K	704512.B.P.C
COB LED	2x5W	Ø80x180mm	945lm	728lm	● 3000K	704513.B.P.C
COB LED	2x5W	Ø80x180mm	1005lm	773lm	○ 4000K	704514.B.P.C
COB LED	2x5W	Ø80x180mm	1043lm	803lm	○ 5000K	704515.B.P.C

Beam Angle: B(1-24° 2-36°)

Power Supply: P(1-On/Off 2-DALI Dim 3-0-10V Dim)

Colour Finish: C(1-Black 2-Grey)

