

# ECtox

## Long Lifetime

## Ammonia Gas Sensor Device

## Datasheet





## Product Overview

The Ammonia Gas Sensor Device, in combination with the principle of coulometry, delivers a high-precision gas detection technology. The higher the ammonia concentration the faster the sensor will be drained. Therefore the sensor lifetime will deteriorate rapidly and more maintenance will be needed.

The ammonia concentration in the livestock industry has various negative effects on the animals and our environment. In a high ammonia concentrated environment the livestock has a higher risk of contracting a disease. The air surrounding the farm, both inside and outside, is polluted and has a pungent smell.

ECtox's big advantage, while continuously working with a high ammonia concentration, is its long lifetime. A pump easily transports the gas to the sensor without the need to calibrate. The sensor can be used for livestock farms, ammonia leakage detection and cooling storages. The output signal, RS485 (Modbus), will effortlessly connect with a gas detector, DCS, PLC or wireless systems.



## Features

- Smart measuring system
- Works on back Ammonia concentration continually
- Combined with intelligent algorithms it has better adaptability to the environment
- Higher accuracy in detection and stable zero point
- With pump, no calibration with  $\text{NH}_3$  gas needed
- New microcircuit design, strong anti-electromagnetic interference ability
- No temperature and humidity influence
- RS485 output, 5-12V DC power
- Stainless steel housing, water and dust proof, anti-corrosion
- The detection range is automatically adjusted to the concentration range of the measured gas, from ppb to higher ppm level
- Continuously monitors its own fault conditions, Sensor, Pump, Power etc.
- RoHS eco-friendly design
- Self-monitoring of the sensor function

## Application

- Livestock farming
- Leakage detection
- High concentration monitoring
- High temperature conditions
- Process Ammonia monitoring
- Cooling storage

# ECtox Ammonia Sensor Device Datasheet

## Easy Gas Sensor Device Innovations

### Principle

The ECtox device contains an solid electrolyte  $\text{NH}_3$  gas sensor featuring long lifetime, robustness and selectivity. Based on a specific electro-chemical reaction and in combination with a sample pump the device measures Ammonia concentration in a wide range.

The gas reaches the working electrode of the sensor by a certain pump volume, which is always constant. All  $\text{NH}_3$  in the offered gas volume will be consumed by the sensor. It creates a signal peak, which is proportional to the Ammonia concentration in the measuring gas. No calibration is necessary due to the coulometric measuring principle.

The sampling system is good for different densities, the speed of diffusion and convection is usually slow or depends on the environment, and temperature and different concentration influenced the speed of molecular motion. Sampling System let gas easy going to sensor.

### Cross Sensitivity

Gas	Formula	Concentration (ppm)	Response(ppm)
Carbon Dioxide	$\text{CO}_2$	1000	0
Carbon Monoxide	$\text{CO}$	50	0
Chlorine	$\text{Cl}_2$	10	-1
Hydrogen	$\text{H}_2$	100	0
Hydrocarbons (unsaturated)	/	/	n.a
Hydrogen Sulfide	$\text{H}_2\text{S}$	50	20
Hydrogen Cyanide	$\text{HCN}$	10	<-5
Isopropanol	$\text{C}_3\text{H}_7\text{OH}$	1000	n.a
Nitric Oxide	$\text{NO}$	25	<-3
Nitrogen Dioxide	$\text{NO}_2$	10	-10
Sulfur Dioxide	$\text{SO}_2$	50	0

Note:

1 ) The above interference factors may differ from sensor to sensor and service life, please refer to the actual test results.

2 ) This table is not complete for all gases, and the sensor may be sensitive to other gases.

### Order Informations

Product Name	Part Number	Range	Resolution
Ammonia Gas Sensor Device	05-ECtox- $\text{NH}_3$ -500-01	0-500ppm	0.1ppm
Ammonia Gas Sensor Device	05-ECtox-HT- $\text{NH}_3$ -500-01	0-500ppm	0.1ppm
Cable	02-LEMO-HXT-1423-1M-01	1m	
	02-LEMO-HXT-1423-10M-01	10m	
Fixed Assembly	02-ECtox-Bracket-SS-01	Optional accessories	

Note: 05-ECtox-HT in above order information are for higher temperature application.

## Specification


Principle	Solid Polymer Electrochemical Detection Technology		
Detection of gas	Ammonia		
Detection Range	0-500ppm	Resolution: 0.1ppm	Lowest Detection Limit: 1ppm
Full-scale accuracy error	± 5% F.S		
Repeatability	≤ 2%		
Settling time	Note: Exposure to harsh chemicals, high concentrations of alcohol, acetone, and ethanol gas during storage may lead to extended warm-up time		
Response time	Dependent on the selected measuring period, between 1 to 10min		
Calibration Gas	The gas distribution standard uses clean air as the background gas, the humidity is 50%, and the normal temperature environment		
Sensor expected life time	≥ 2 years Note: Temperature (0-25) °C, humidity (30-50)% RH, the measured gas concentration is within the range, there is no gas environment that affects the warm-up time mentioned above		
Long-Term Drift	< 1% /month		
Output	RS485 (Modbus protocol), Baud rate: 9600 4Pin Leomo Cable with 1m (Other lengths on request)		
Get data command	See ECTox protocol document for details		
Working Voltage	5V to 12V DC		
Maximum Current Consumption	1A		
Maximum Power Consumption	5W		
Working temperature	-20°C to +55°C		
Optimal working temperature	25°C		
Working humidity	15 ~ 95% RH. Non-condensing		
Optimum working humidity	50% RH.		
Working pressure	Atm ± 10% Keep Stable Pressure		
Size	159 x 43 (mm)		
Weight	ECTox: 450g		
Temperature and humidity sensor data	Temperature Range: -40 to +85°C Humidity measurement range: 10 to 95% RH. non-condensing		Relative error: ± 0.2 °C Relative error: ± 2%
Warranty	12 months		

# ECtox Ammonia Sensor Device Datasheet


## Easy Gas Sensor Device Innovations

### Mechanical Drawing (unit: mm)

05-ECtox-NH<sub>3</sub>-500-01 Dimension Diagram

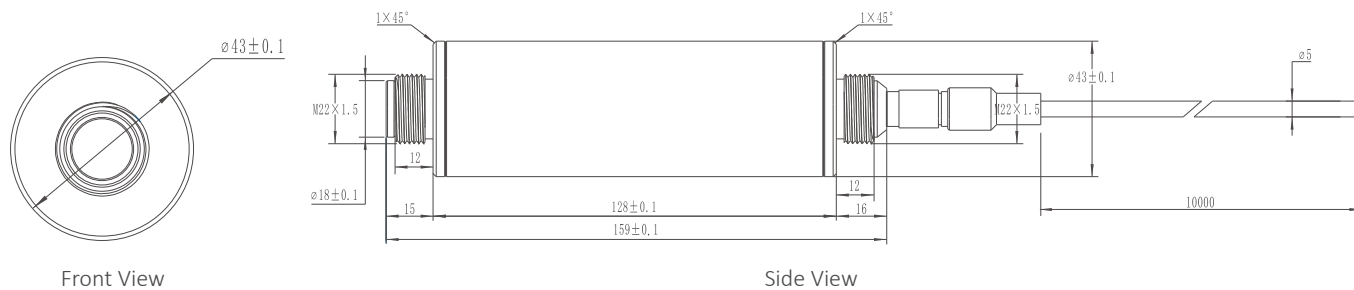


05-ECtox-HT-NH<sub>3</sub>-500-01 Dimension Diagram

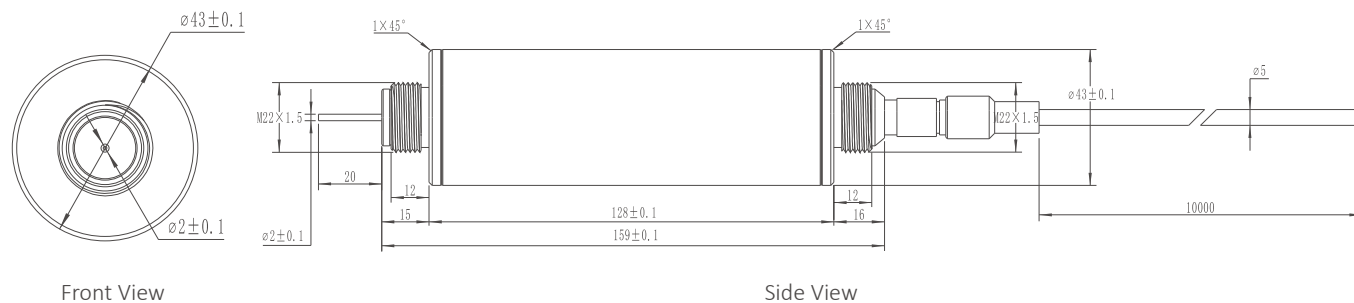


### Connection

05-ECtox-NH<sub>3</sub>-500-01 Connection

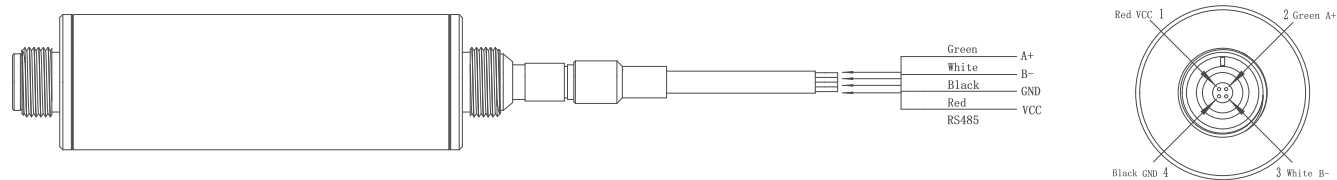

05-ECtox-HT-NH<sub>3</sub>-500-01 Connection

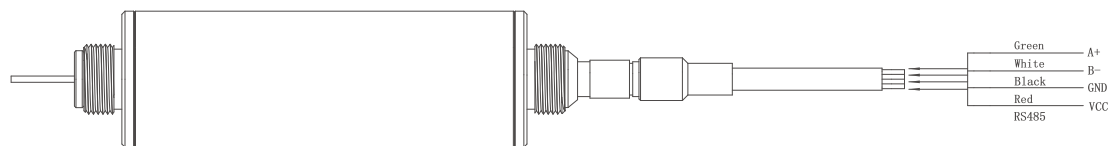

## Disclaimer

The AQ Sense performance data stated above is based on data obtained under test conditions using the AQ Sense gas distribution system and AQ Sense test software. In the interest of continuous product improvement, AQ Sense reserves the right to change design features and specifications without notice. We are not responsible for any loss, injury or damage caused by this. AQ Sense assumes no responsibility for any indirect loss, injury or damage resulting from the use of this document, the information contained therein or any omissions or errors herein. This document does not constitute an offer to sell. The data it contains are for informational purposes only and cannot be considered a guarantee. Any use of the given data must be evaluated and determined by the user to comply with federal, state and local laws and regulations. All specifications outlined are subject to change without notice.

## Warning

AQ Sense devices are designed for use in a variety of environmental conditions. However, due to the principles and characteristics of sensors and to ensure normal use, users must strictly follow this article during storage, assembly and operation of the device. Although our products are highly reliable, we recommend checking the device's response to the target gas prior to utilization to ensure on-site use. At the end of the products service life, please do not discard any electronics in the domestic waste, instead follow the local governments electronic waste recycling regulations for disposal.





### **AQ Sense GmbH**

Wolfratshauser Str. 53, 82067 Ebenhausen, Germany

Tel: +49(0)8178 9999 231

Email: [info@aq-s.de](mailto:info@aq-s.de)

[www.aq-s.de](http://www.aq-s.de)

ECtox Ammonia Sensor Device\_Datasheet\_V1.3\_20240507

Copyright©2024 AQ Sense GmbH