




TEE/TEM/TEM...G/TEM...S | 5-step transformer

With plastic housing

- Input voltage
230 V 1~, 50/60 Hz
- With motor protection
- Surface mounting
- Max. ambient temp 35 °C
- Protection class IP 54
- TEM ... G
With contact for gas solenoid valve
- TEM ... S
With contact for damper motor

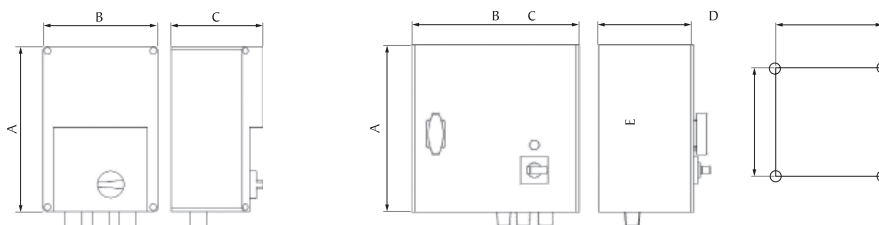

- With metal housing

	I_{max}	Fuse	Output voltage U_A	Casing	A	B	C	D	E	Weight
Type	A	A	V		in	in	in	in	in	lbs
TEE 015	1,5	2,0	110/140/170/190/230	Plastic	8,1	4,5	3,9	3,9	5,5	0,2
TEM 035	3,5	5,0	110/140/170/190/230	Plastic	10,0	6,7	5,5	6,1	7,6	0,4
TEM 050	5,0	8,0	110/140/170/190/230	Plastic	10,0	6,7	5,5	6,1	7,6	0,5
TEM 075	7,5	10,0	110/140/170/190/230	Plastic	12,0	7,9	5,5	7,2	9,3	0,7
TEM 100	10,0	14,0	110/140/170/190/230	Metal	12,8	11,8	7,3	10,0	10,0	1,1
TEM 130	13,0	18,0	110/140/170/190/230	Metal	12,8	11,8	7,3	10,0	10,0	1,3
TEM 035G	3,5	5,0	110/140/170/190/230	Plastic	10,0	6,7	5,5	6,1	7,6	0,4
TEM 050G	5,0	8,0	110/140/170/190/230	Plastic	10,0	6,7	5,5	6,1	7,6	0,5
TEM 075G	7,5	10,0	110/140/170/190/230	Plastic	12,0	7,9	5,5	7,2	9,3	0,7
TEM 100G	10,0	14,0	110/140/170/190/230	Metal	12,8	11,8	7,3	10,0	10,0	1,1
TEM 130G	13,0	18,0	110/140/170/190/230	Metal	12,8	11,8	7,3	10,0	10,0	1,3
TEM 035S	3,5	5,0	110/140/170/190/230	Plastic	10,0	6,7	5,5	6,1	7,6	0,4
TEM 050S	5,0	8,0	110/140/170/190/230	Plastic	10,0	6,7	5,5	6,1	7,6	0,5
TEM 075S	7,5	10,0	110/140/170/190/230	Metal	12,0	7,9	5,5	7,2	9,3	0,7
TEM 100S	10,0	14,0	110/140/170/190/230	Metal	12,8	11,8	7,3	10,0	10,0	1,1
TEM 130S	13,0	18,0	110/140/170/190/230	Metal	12,8	11,8	7,3	10,0	10,0	1,3