


EM-SILENT

Very silent and Very powerful

- Energy saving fan with highest aerodynamic efficiency
- Corrosion and weather-resistant plastic housing
- 2 speed steps selectable through external step switch
- Built-in thermostatic switch with automatic reset
- Appealing design suitable for visible installation
- Compact construction and reduced weight for an easy installation
- Plastic blades
- Diagonal fan with plastic, 3D shaped rotor and stator blades




Type	U _N V	f _N Hz	I _{max.}	P _N W	Q cfm / m³/h	RPM	Noise level (dBA)	A*B*C*D
EM 100L E2 01 silent (4")	230V ~	50	0,2	25	147 / 250	2500	40	371*173*216*99
EM 125L E2 01 silent (5")	230V ~	50	0,3	29	209 / 355	2450	39	291*173*216*124
EM 160L E2 01 silent (6")	230V ~	50	0,3	50	335 / 570	2600	49	340*190*238*159
EM 200 E2 01 silent (8")	230V ~	50	0,6	105	647 / 1100	2600	58	376*250*265*198.5
EM 250 E2 01 silent (10")	230V ~	50	0,8	180	917 / 1560	2550	60	450*290*323*250
EM 315 E2 01 silent (12")	230V ~	50	2,1	285	1211 / 2060	2350	69	445*324*420*312

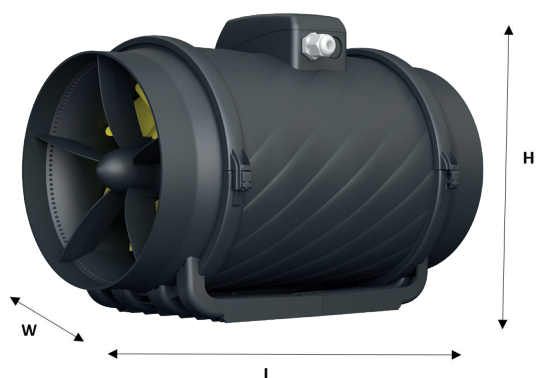

- Variable installation in horizontal or vertical position
- Direct in-line installation
- Integrated mounting bracket for easy fan installation
- By releasing the mounting brackets, the wiring box can be oriented to best suit the application

EM-SILENT (4")

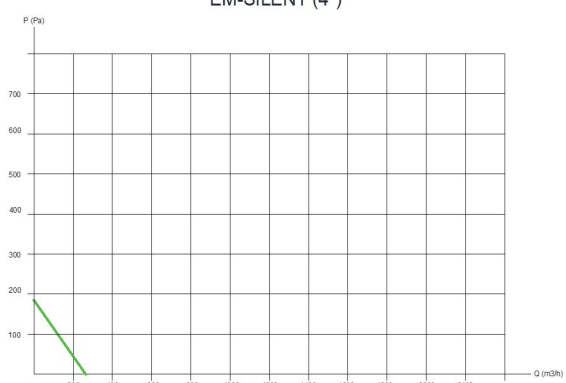


EM-SILENT (5")



EM-SILENT (6")



EM-SILENT (8")

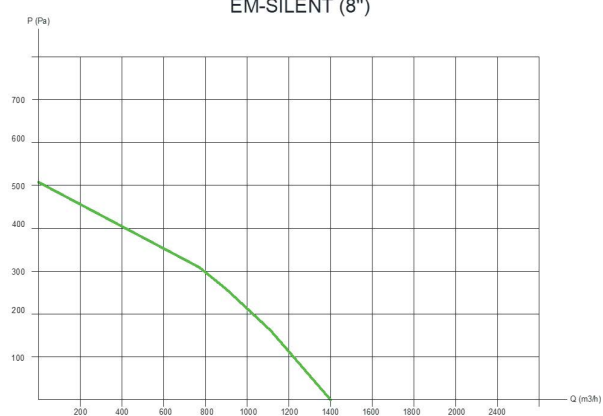

EM-SILENT main specifications

Model	Speed	Voltage / Frequency	Power (W)	Speed (RPM)	Performance (m ³ /h)	Air pressure (Pa)	Noise level (dBA)
EM 100L E2 01 SILENT(4")	L2	220~240V/50Hz	25	2500	250	190	40
	L1		23	1850	180	110	31
EM 125L E2 01 SILENT(5")	L2	220~240V/50Hz	29	2450	355	190	39
	L1		25	1800	240	110	30
EM 150L E2 01 SILENT(6")	L2	220~240V/50Hz	50	2600	570	305	49
	L1		42	2000	415	225	40
EM 160L E2 01 SILENT(6")	L2	220~240V/50Hz	50	2600	570	305	49
	L1		42	2000	415	225	40
EM 200L E2 01 SILENT(8")	L2	220~240V/50Hz	105	2600	1100	350	58
	L1		75	2250	850	300	50
EM 250L E2 01 SILENT(10")	L2	220~240V/50Hz	180	2550	1560	510	60
	L1		134	1985	1150	370	52
EM 315L E2 01 SILENT(12")	L2	220~240V/50Hz	285	2350	2060	715	69
	L1		215	1900	1650	480	61

Type	Dimensions, cm				WEIGHT
	A	B	C	D	
EM 100L E2 01 SILENT(4")	371	173	216	99	2,3
EM 125L E2 01 SILENT(5")	291	173	216	124	2,3
EM 150L E2 01 SILENT(6")	323	190	238	149	3,3
EM 160L E2 01 SILENT(6")	340	190	238	159	3,3
EM 200L E2 01 SILENT(8")	376	250	266	198,5	4,0
EM 250L E2 01 SILENT(10")	450	290	323	250	7,5
EM 315L E2 01 SILENT(12")	446	324	420	312	11,5