




- IP 55 Similar to image



- IP 20/21 Similar to image

### FU I Frequency converter

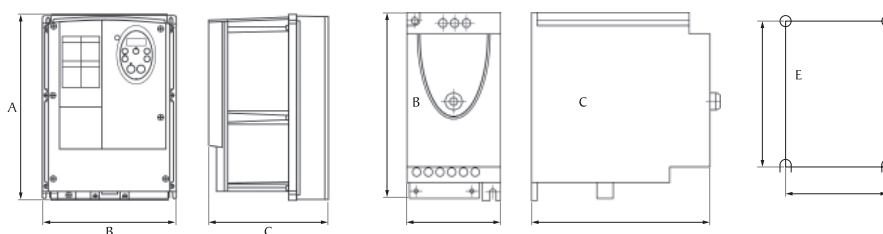

- Power supply  
230 V 1~, 50/60 Hz
- Variable speed control
- Output voltage 0 - 230 V 3~
- Motor-/converter protection
- Integrated interference filter/  
class A
- Integrated Modbus interface
- Easy start-up

| Type      | p<br>W | I <sub>A</sub><br>A | p <sub>V</sub><br>W | Protection<br>class | t <sub>U</sub><br>°C | A<br>in | B<br>in | C<br>in | D<br>in | E<br>in | Weight<br>lbs |
|-----------|--------|---------------------|---------------------|---------------------|----------------------|---------|---------|---------|---------|---------|---------------|
| FU 075 01 | 750    | 4,8                 | 60                  | IP 55               | -10/+40              | 9,4     | 8,3     | 8,5     | 8,6     | 7,6     | 13,9          |
| FU 15 01  | 1500   | 8,0                 | 90                  | IP 55               | -10/+40              | 11,7    | 8,5     | 9,6     | 10,9    | 7,8     | 19,4          |
| FU 22 01  | 2200   | 11                  | 123                 | IP 55               | -10/+40              | 13,4    | 9,1     | 10,3    | 12,5    | 8,3     | 23,6          |
| FU 075 03 | 750    | 4,2                 | 44                  | IP 20               | -10/+40              | 5,6     | 2,8     | 5,2     | 4,7     | 2,4     | 2,0           |
| FU 15 03  | 1500   | 7,5                 | 72                  | IP 20               | -10/+40              | 5,6     | 4,1     | 6,1     | 4,7     | 3,7     | 3,1           |
| FU 22 04  | 2200   | 10,0                | 93                  | IP 20               | -10/+40              | 5,6     | 4,1     | 6,1     | 4,7     | 3,7     | 3,3           |

- Power supply  
400 V 3~, 50/60 Hz
- Output voltage 0 - 400 V 3~
- Variable speed control
- Motor-/converter protection
- Integrated interference filter/  
class A
- Integrated Modbus interface
- Easy start-up

| Type     | p <sub>IN</sub><br>W | I <sub>A</sub><br>A | p <sub>V</sub><br>W | Protection<br>class | t <sub>U</sub><br>°C | A<br>in | B<br>in | C<br>in | D<br>in | E<br>in | Weight<br>lbs |
|----------|----------------------|---------------------|---------------------|---------------------|----------------------|---------|---------|---------|---------|---------|---------------|
| FU 22 05 | 2200                 | 5,5                 | 79                  | IP 21               | -10/+50              | 7,2     | 5,6     | 6,0     | 6,2     | 5,0     | 5,1           |
| FU 30 03 | 3000                 | 7,1                 | 123                 | IP 21               | -10/+50              | 7,2     | 5,6     | 6,0     | 6,2     | 5,0     | 5,5           |
| FU 40 03 | 4000                 | 9,5                 | 150                 | IP 21               | -10/+50              | 7,2     | 5,6     | 6,0     | 6,2     | 5,0     | 5,5           |
| FU 55 03 | 5500                 | 14,3                | 232                 | IP 21               | -10/+50              | 9,1     | 7,1     | 6,8     | 8,3     | 6,3     | 10,4          |
| FU 22 03 | 2200                 | 5,5                 | 79                  | IP 55               | -10/+40              | 13,4    | 9,1     | 10,3    | 12,5    | 8,3     | 23,6          |
| FU 30 04 | 3000                 | 7,1                 | 123                 | IP 55               | -10/+40              | 13,4    | 9,1     | 10,3    | 12,5    | 8,3     | 23,6          |
| FU 40 04 | 4000                 | 9,5                 | 150                 | IP 55               | -10/+40              | 13,4    | 9,1     | 10,3    | 12,5    | 8,3     | 23,6          |