

E3600 (FP)



USER MANUAL

Please read the user manual thoroughly before using

FUNCTION INTRODUCTION

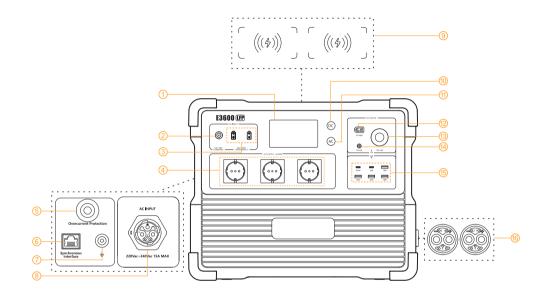

- ① LCD Display
- 4 AC 220V~240V Output
- 7 External Grounding Port
- ODC 12V/USB/ Wireless Switch
- **10** DC12V Auxiliary Output
- **6** Battery Expansion Port

- ② DC 12V~30V Charging Port
- 5 Overcurrent Protection
- 8 AC 220V~240V Input
- ① AC 220V~240V Switch
- 4 DC12V(5525)Output

- 3 DC 32V~150V Charging Port
- 6 RJ45 Signal Sync Interface
- Wireless Charger
- OC12V XT60 Output
- USB-A/USB-C Ports

SPECIFICATIONS


GENERAL INFO							
	Capacity	3072Wh(51.2V60Ah)	×	Temperature	0°C~45°C/32°F~113°F (Charging) -20°C~45°C/-4°F~113°F (Discharging)		
\$	Battery Type	LiFePO4 (3500+Cycles to 80%)	(Julip	Dimension	L17.5*W12.1*H13.8 in L445*W307*H350 mm		
	Net Weight	Around 79lb Around 36Kg					

	DC OUTPUT			
USB-A	(5V,9V,12V,Max 18W)*4			
USB-C	(5V,9V,12V,Max 18W)*1 (5V,9V,12V,20V,Max 100W)*1			
©,© XT60-F	Output *1 DC 12V-30A	360W Max		
Cigar P	ort *1 DC 12V-10A	SOUVV IVIAX		
O DC 552	5 Output *1 DC 12V-5A			
[(((\$))] Wireles	s Charger *2 15W Max			
AC OUTPUT				
AC Out	out *3 Pure sine wave 220V~240V Rated 3600W Max			

AC INPUT					
	MJ25 (3+2) *1	220Vac~240Vac 50/60HZ 3200W Max (Charging cable with 15A)			
DC INPUT					
(•)	5521 *1	12V~30V Max 7A Max 150W			
	XT60-M *2	32V~150V Max 20A Max 1200W*2			


EXTRA BATTERY PORT					
MJ32 *2	Cascade with max 4 pieces of EP3000-48V				

HOW TO USE THE E3600 LFP

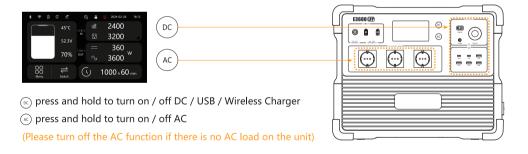

DETAILS AND OPERATING INSTRUCTIONS OF THE DISPLAY

Display and switch of home page 1



- Bluetooth connection
- WIFI connection
- 3 Connection of expansion battery pack
- 4 UPS ON
- 6 ECO ON

- 6 TIMER SWITH ON
- 7 Touchscreen Lock
- 8 Warning
- 9 Date
- 10 Time

- Battery Temperature
- Battery Voltage
- Battery Volume Percentage
- Menu
- 6 Switch Button

- 6 Display of Input
- Oisplay of Output
- Remaining Discharge Time /Remaining Charge Time

Display and switch of home page 2



HOW TO SET THE TIME AND LANGUAGE OF THE SCREEN?

Click "Menu" showed as (Picture 1).

Then click "System Setting" showed as (Picture 2).





(Picture 2)

- 1: Page up/down by clicking "^"/" v " on the left side.
- 2: Click "Time setting" to adjust the time showed as (Picture 3).





3: Click "Language" to adjust language type. Showed as (Picture 4).






HOW TO CONNECT WITH APP?

Click "Menu" showed as (Picture 1).

Then click "System Setting" showed as (Picture 2).



(Picture 1)



(Picture 2)

- 1: Click "WIFI reset" showed as (Picture 5).
- 2: Click "\" to reset the WIFI and enter the pairing mode showed as (Picture 6).

And then search the device model through the near field on the APP.

If you connect to the APP via WIFI successfully, the WIFI symbol will be displayed.



(Picture 5)



(Picture 6)

HOW TO OPERATE THE SETTING OF INPUT AND OUTPUT?

Click "Menu" showed as (Picture 1).

Then click "Input Output Settings" showed as (Picture 7).



(Picture 1)



(Picture 7)


Click each option to make the corresponding settings showed as (Picture 8).



(Picture 8)


PACKING LIST

Standard Product List

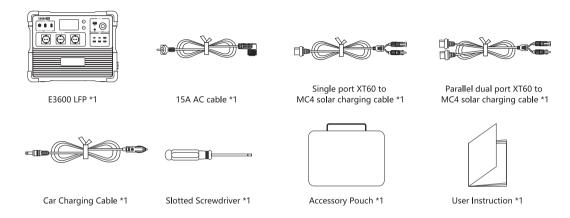

Optional product accessory

(* The following accessories are not included in the standard package and can be purchased separately)





EP3000-48V


T2 Trolley

UPS FUNCTION

The E3600 LFP supports UPS function. It can provide the loads(such as computers, data centers, telecommunication equipment) near-instantaneous(within 8~20ms) protection from unexpected power interruptions of the main power supply.

Note: Not applicable to specific applications that need transfer time under 8ms, such as servers and workstations.

This UPS function only support protection for loads under 3600W(120V), we recommend that you only connect one device at a time to avoid overload and thus result in protection failure.

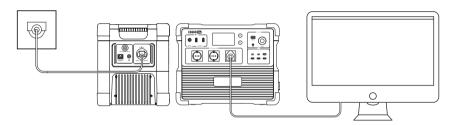


EXPANDABLE BATTERY


Please use the official cascading cable with MJ32 socket when you want to connect with 4 pcs of expansion battery pack (EP3000-48V) to avoid damage of the power station. Notes about cascade:

- 1: Cascading will be faster if there is only 10% difference between the main power station and the expansion battery pack.
- 2: Before cascading, please make sure the number of knob on the battery pack is unique. The number should be adjusted to 0,1,2,3 according to the number of packs.


If the number is wrong, the parameters of the packs will not be shown on the display of the main power station.



EP3000-48V




HOW TO CHARGE THE E3600 LFP BY VEHICLE?



USING SOLAR PANELS TO CHARGE THE E3600 LFP


- 1. DC5521 Charging Port: PV/DC 12V~30V, 150W maximum; VOC(open circuit voltage) of solar panel must be less than 30V;
- 2. XT60-M Charging Port: PV(operating voltage) range 32V~150V, 2400W maximum; VOC(open circuit voltage) of solar panel/array must be less than 150V, otherwise, it will damage the unit! Do not wire more than three 36V solar panels in series, or more than six 18V solar panels in series.

(18V/36V stands for Vmp of the solar panel)

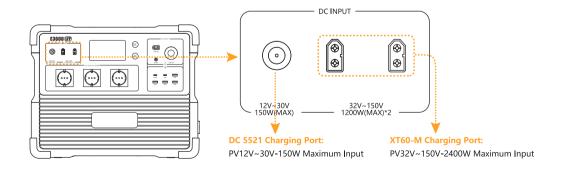


USING SOLAR PANELS TO CHARGE THE E3600 LFP


panel should be less than 75V, and the VMP should be greater than 16V.

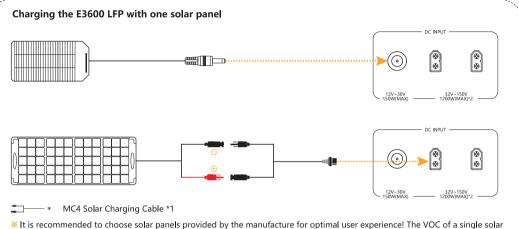

panel should be less than 150V, and the VMP should be greater than 32V.

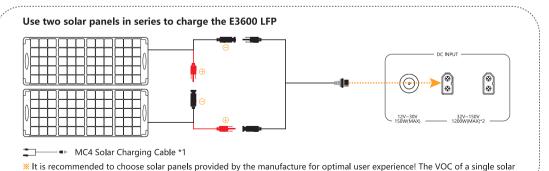


Use three solar panels in series to charge the E3600 LFP (It is recommended to use solar panels with same specifications for optimal power.)

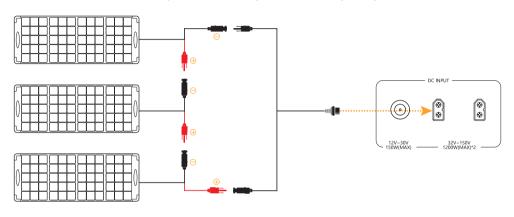


MC4 Solar Charging Cable *1

** It is recommended to choose solar panels provided by the manufacture for optimal user experience! The VOC of a single solar panel should be less than 50V, and the VMP should be greater than 11V.

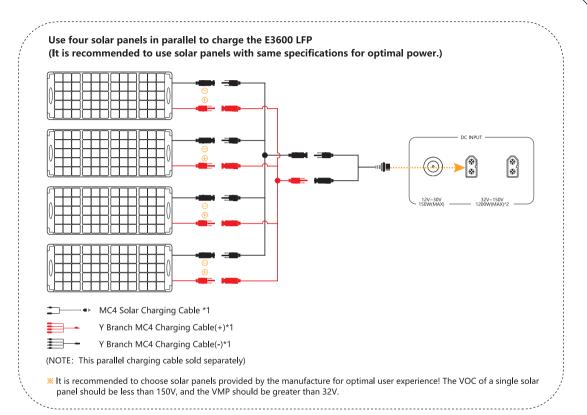

DO NOT WIRE FOUR SOLAR PANELS IN SERIES!

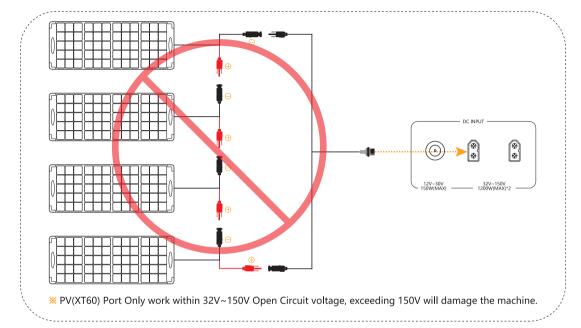

FAQS

- Q1: What kind of battery is used in E3600 LFP? How long it can last?
- A: E3600 LFP utilizes high quality UL certified automotive LiFePO4 battery, it can retain 80% of its original capacity at 3500 complete charge cycles.
- Q2: What devices can E3600 LFP power?
- A: Please note that the AC output port can only charge or power devices that operate at less than 3600W. DC output port can only charge or power that operate at less than 12V-30A.

- Q3: Can the E3600 LFP be used as UPS?
- A: E3600 LFP supports UPS function with an automatic switchover time of 8~20ms.
- Q4: Can the E3600 LFP be charged while discharging?
- A: Yes, E3600 LFP can run devices while it is being charged. The battery will eventually run out if the discharging is greater than the charging during the pass through charging.
- Q5: How to calculate the E3600 LFP running time?
- A: Running Time=Total Capacity(3072Wh) * 0.85(Depth of Discharge)/Loading Power(Watts)
- Q6: Can I use the E3600 LFP indoors and charge the E3600 LFP indoors?
- A: Yes, the E3600 LFP is safe to use indoors.
- Q7: Does E3600 LFP have built-in MPPT charge controller?
- A: Yes, there are two independent 1200W(PV 32V-150V) MPPT charge controllers inside, and one step up 150W (PV 12V~30V) MPPT charge controller, The Voc (Open Circuit Voltage) of the solar panels should not exceed 150V.
- Q8: How to store the E3600 LFP?
- A: Please turn off the unit and then store it in a dry, ventilated place at normal room temperature. Do not place this unit near water sources or a wet/moist environment. For long-term storage, it is recommended to discharge the battery to 30% every three months and recharge it to 60% to sustain the battery life.

DISCLAIMER

Please read the user manual thoroughly before using this product, and keep this manual in a safe place for future reference. Failure to follow the instructions for proper set up, use, and care for the device can increase the risk of serious personal injury, death, or property damage. Once you use this device, you are deemed to have understood, recognized and accepted all terms and contents of this document. The user shall be responsible for his own actions and all consequences arising from failure to use the device in accordance with the "User Manual", or as authorized in the current product literature.

In compliance with laws and regulations, the original company reserves all rights for final explanation, and to change these terms and conditions at any time without prior notice. In the event that any revisions are made, the revised terms and conditions will be posted on our website correspondingly, please visit our website to inform yourself of any changes.

WARNING

- 1. Do not place the device near heat source, such as a fire or a heating furnace.
- 2. Do not immerse in any liquid, or expose the unit to rain or wet conditions.
- 3. Do not use the battery in a strong static electricity or electromagnetic environment.
- 4. Do not disassemble or puncture the product with sharp objects in any way.

- 5. Short circuits can be caused by: vermin or pests chewing through wires; water or other fluids coming into contact with electrical wiring.
- 6. It's prohibited to be used as car jump starter, only can be used to charge the car battery.
- 7. Do not use unauthorized accessories or parts provided by third-party manufacturers.
- 8. When using this product, please strictly follow the ambient temperature for use in the user manual. If the temperature is too high, the battery can potentially result in self-combustion and will burst into flames, which can cause widespread damage. If the temperature is too low, the performance of the battery will be seriously degraded, and it
- 9. Do not stack heavy objects on this product.
- 10. Do not block the air vents during use, or leave the device in a non-ventilated or dusty space.
- 11. Please avoid impacts, fall off, and violent vibration. Please turn off the device immediately and stop using it in the event of major exterior impact. Please fasten the unit firmly during transportation to avoid vibration and impact.
- 12. In the event of immersing the device into the water accidently, please place the unit in a safe open area and keep away from the unit until it is completely dry. The dried unit should not be reused and should be disposed of properly according to the local regulation. If the device catches fire, use the fire extinguishing equipment in the following recommended order: water or mist, sand, fire blanket, dry chemical, carbon dioxide fire extinguisher.
- 13. Please wipe it with a dry cloth to clean the surface of the device.

may even fail to meet the normal use requirements.

- 14. Please place this device with care to prevent the product from being damaged due to fall off. If the product is damaged due to fall off, please turn off the unit immediately and place it in an open area, keep away from combustibles and crowds, and dispose of in accordance with local laws and regulations.
- 15. Please store this device in a place out of reach of children and pets.

DISPOSAL

- 1. When conditions permit, please be sure to completely discharge the battery of this product, and then put the product in the designated battery recycling box. This product contains batteries. Batteries are dangerous chemicals and are strictly prohibited from being disposed of in ordinary trash. For details, please follow local laws and regulations on battery recycling and disposal.
- 2. If the battery cannot be completely discharged due to the failure of the product itself, please do not dispose of the battery directly in the battery recycling box, and contact a professional battery recycling company for further disposal.
- 3. The battery will not be able to start after being over-discharged, please dispose of it according to the principle of disposal.

EXCLUSIONS

Warranty	does	not	annly	/ to:
vvariantly	uoes	HOL	appi	, ιο.

Misused, abused, modified,damaged by accident, or used for anything other than normal consumer use as authorized in the current product literature.

