



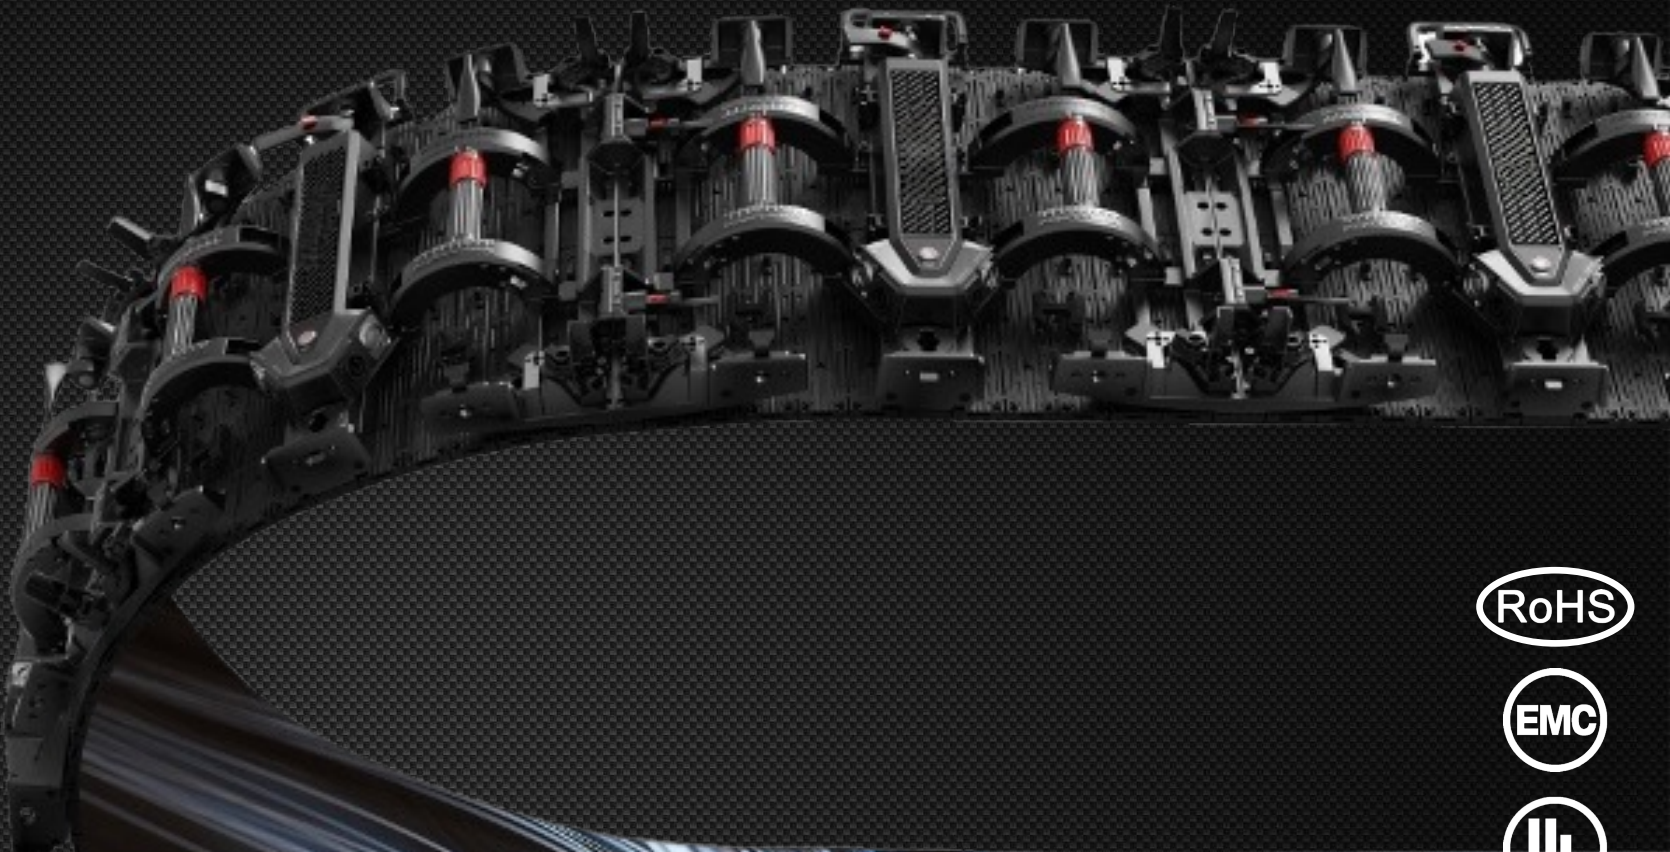






# SNAKE

# HIGHEST PRECISION CURVE LOCK

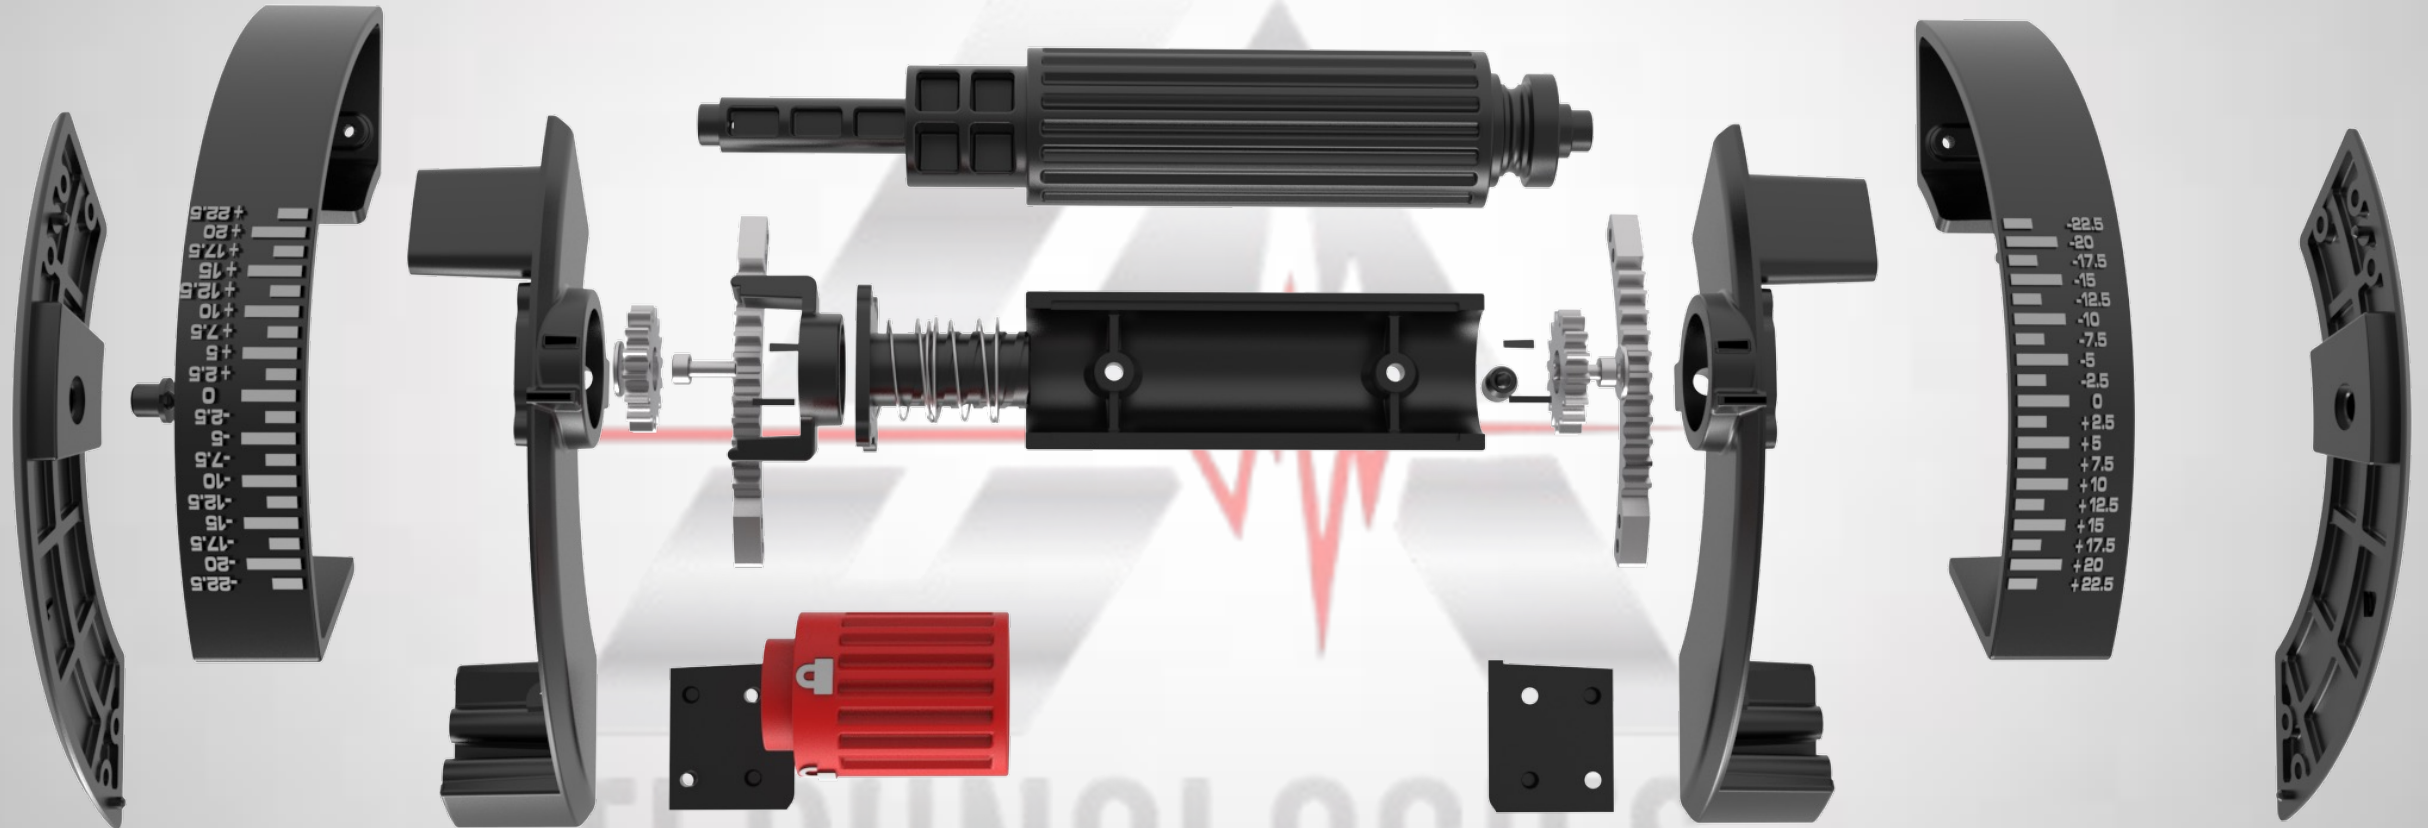


TECHNOLOGIES

# MORE PANNEL OPTIONS

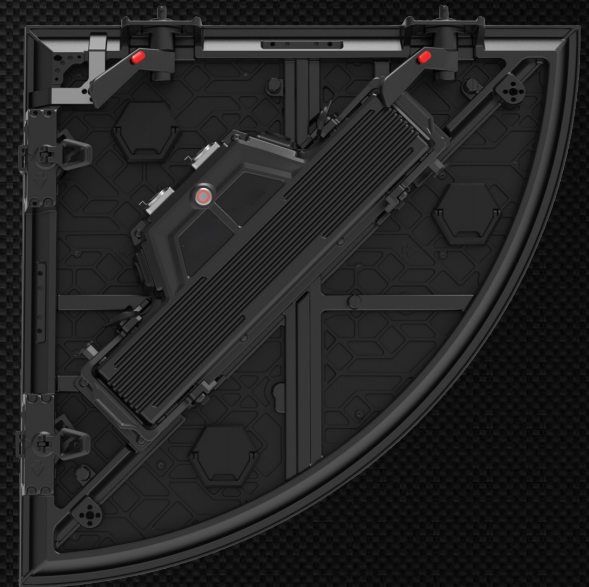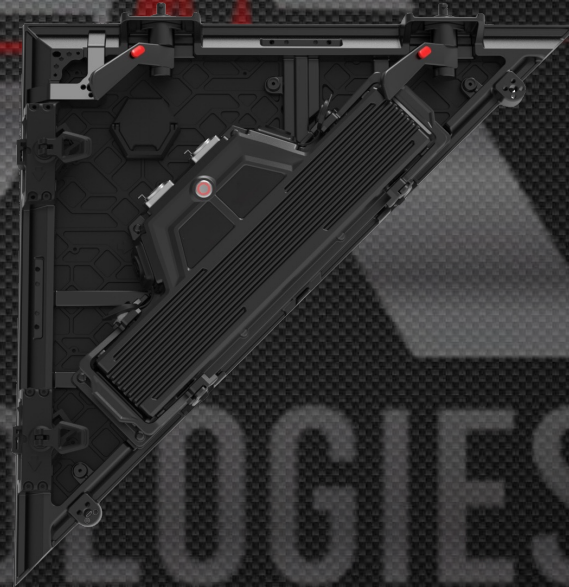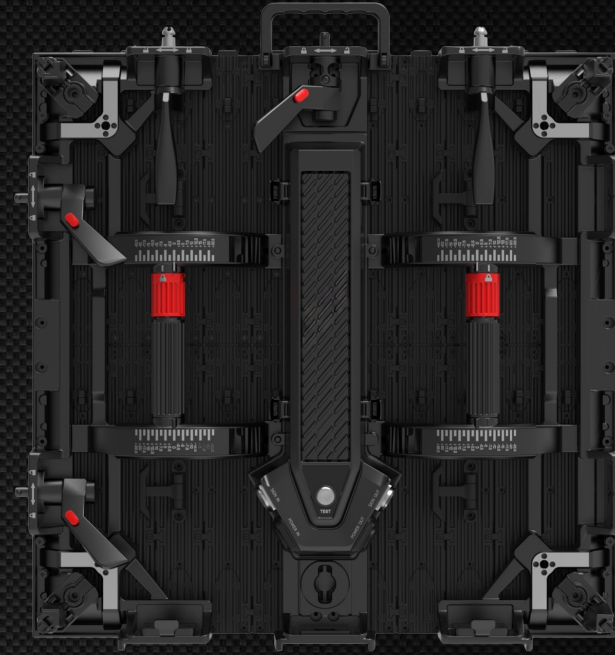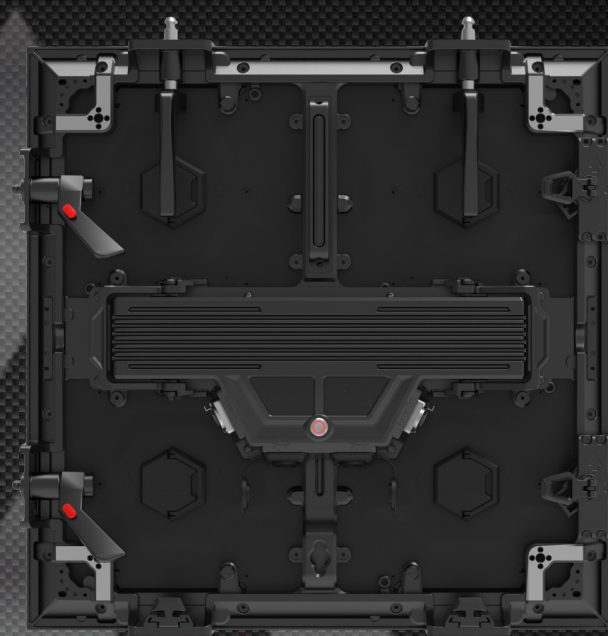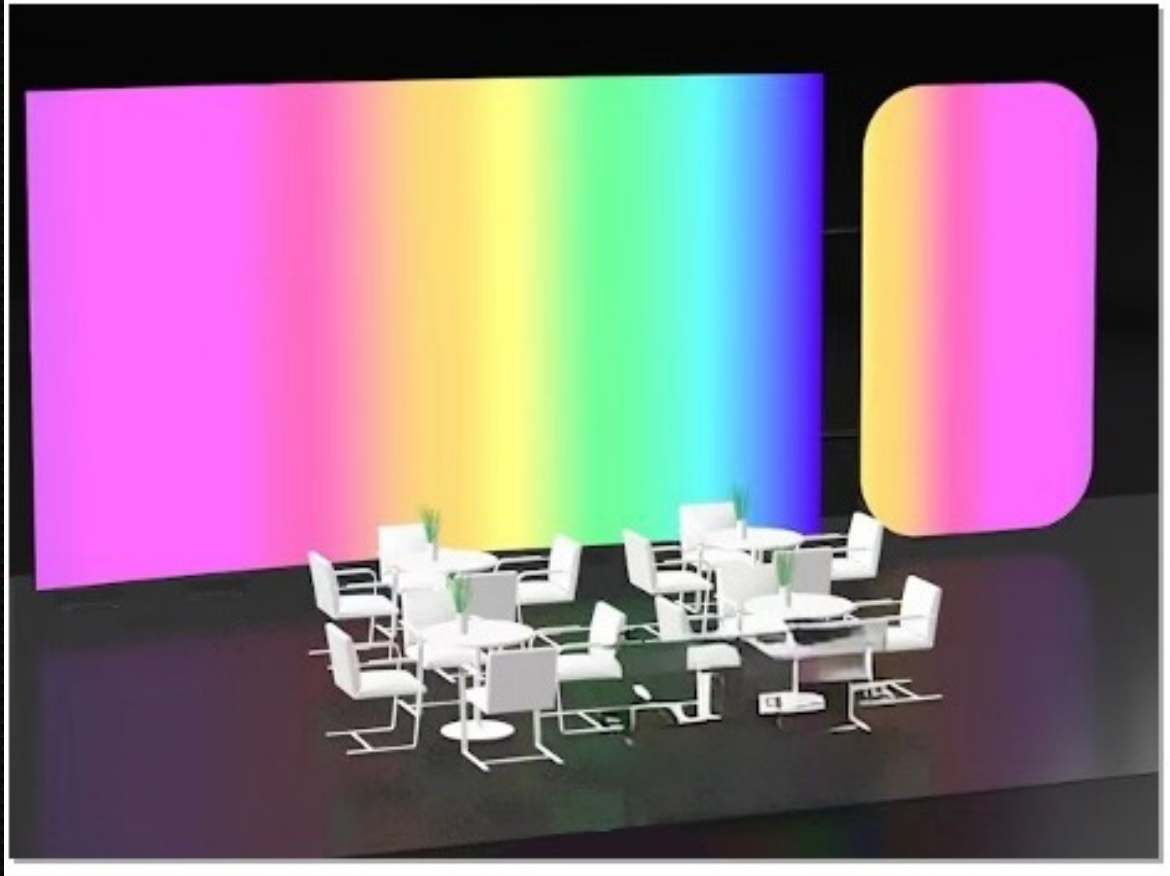


TECHNOLOGIES

# MODULAR DESIGN

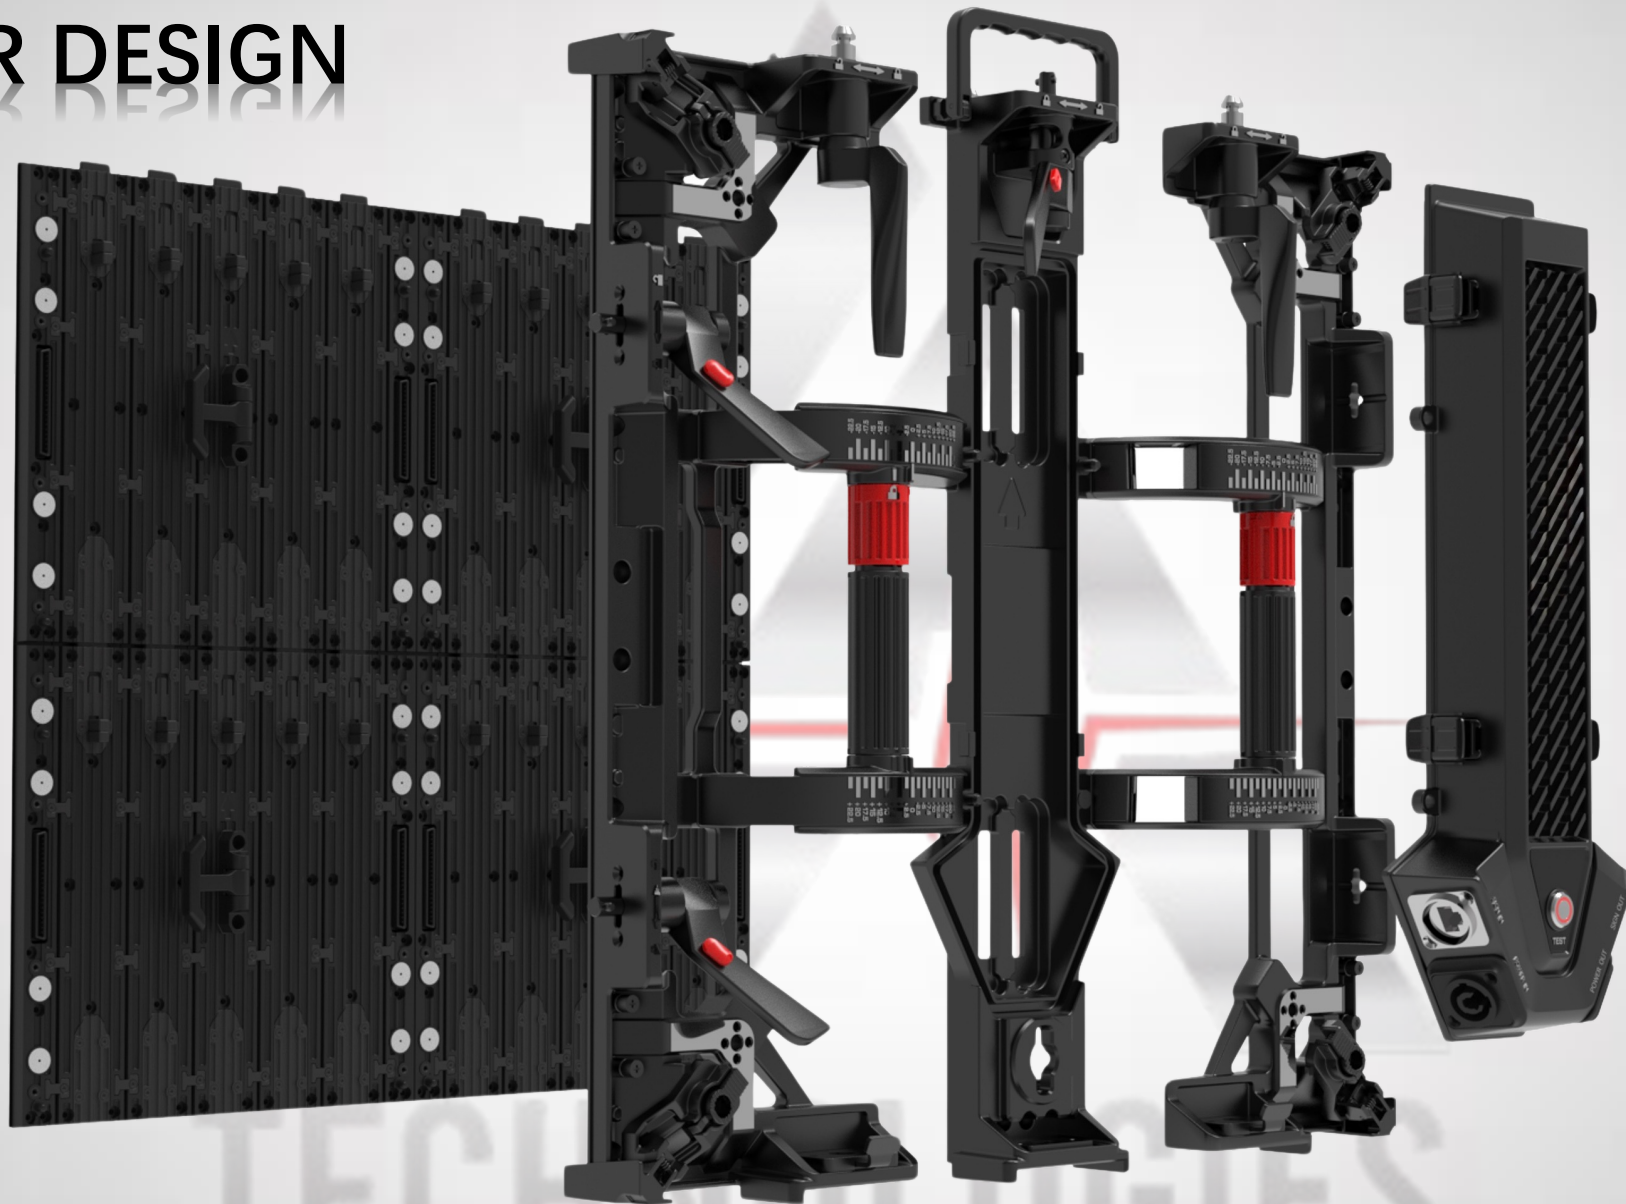

# PANNEL DETAILS

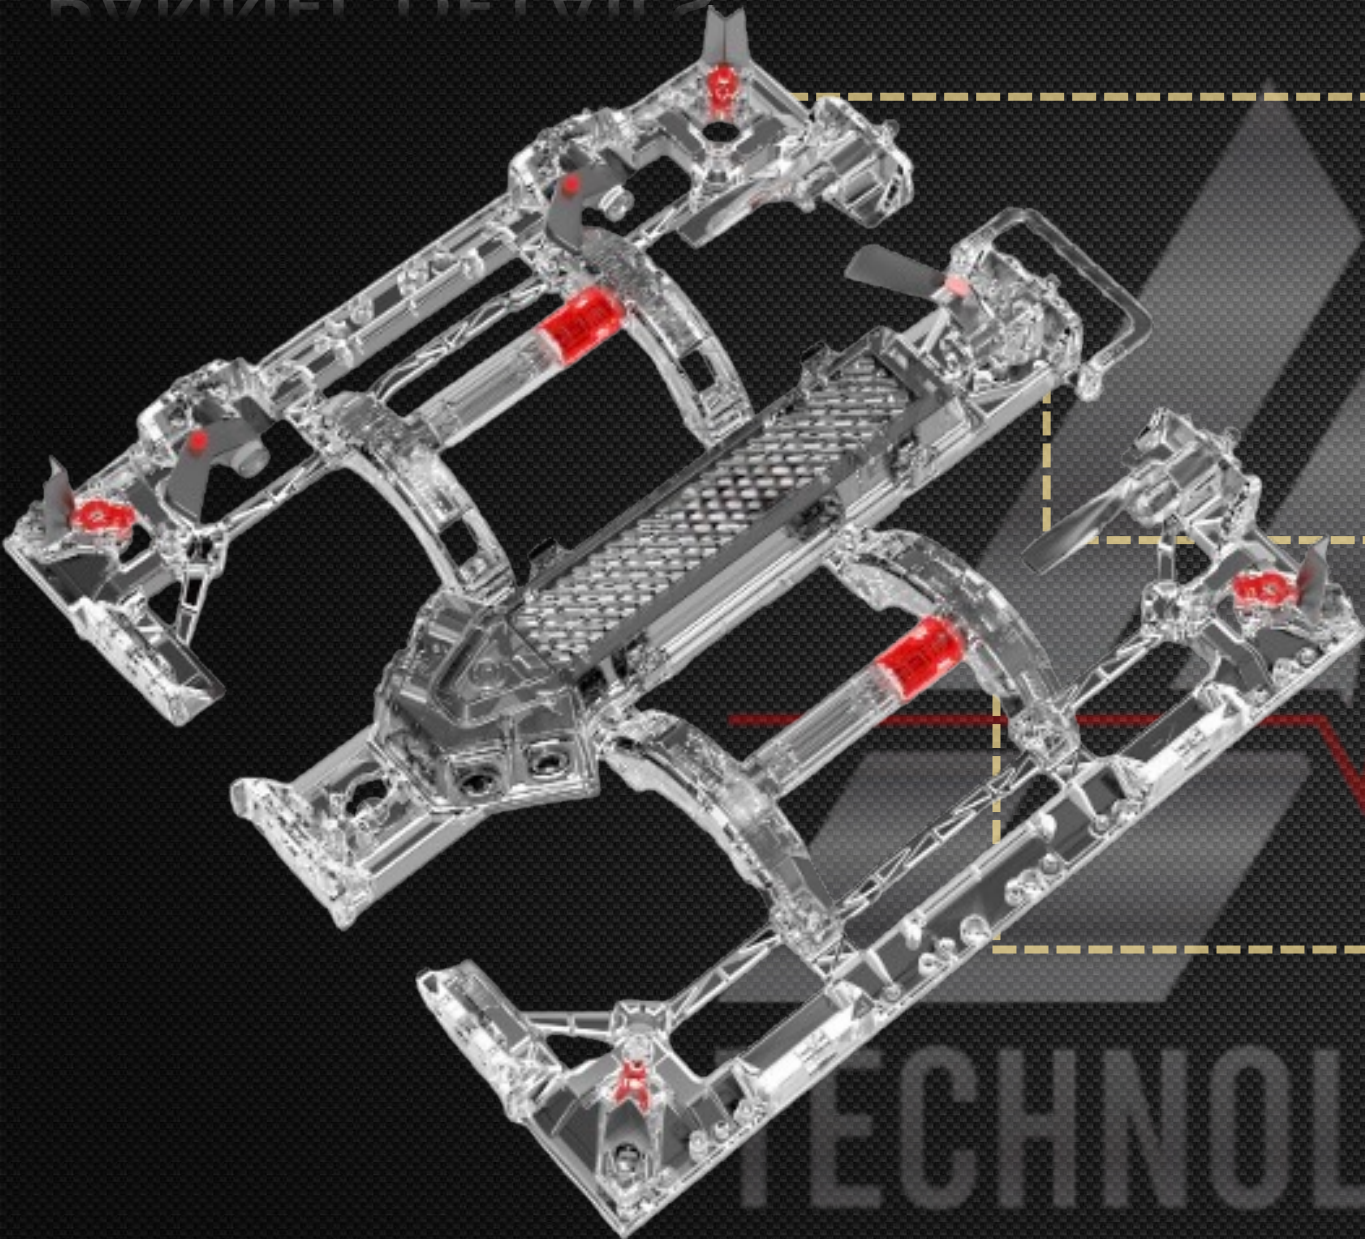

Corner Protection



Fast Lock




Highest Precision Curve Lock

# 8 CABINETS FOR 1 CIRCULAR RING




x 8 pcs =

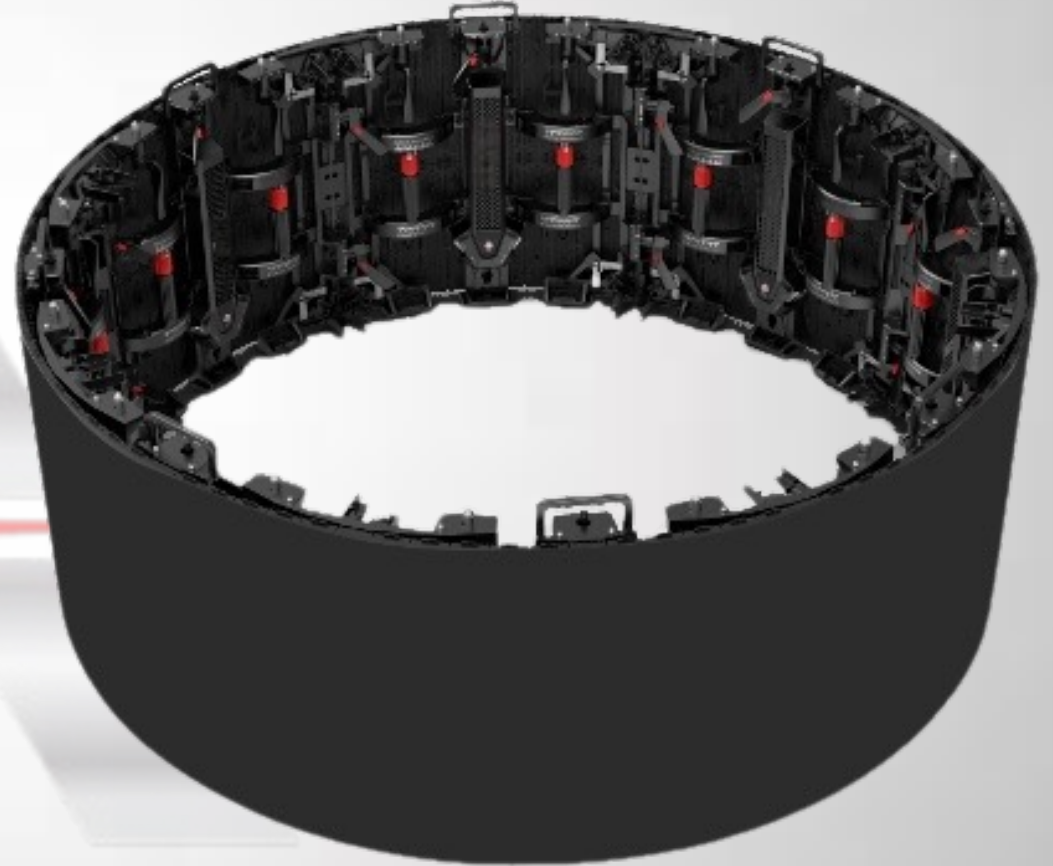


TECHNOLOGIES

# INDOOR & OUTDOOR AVAILABLE

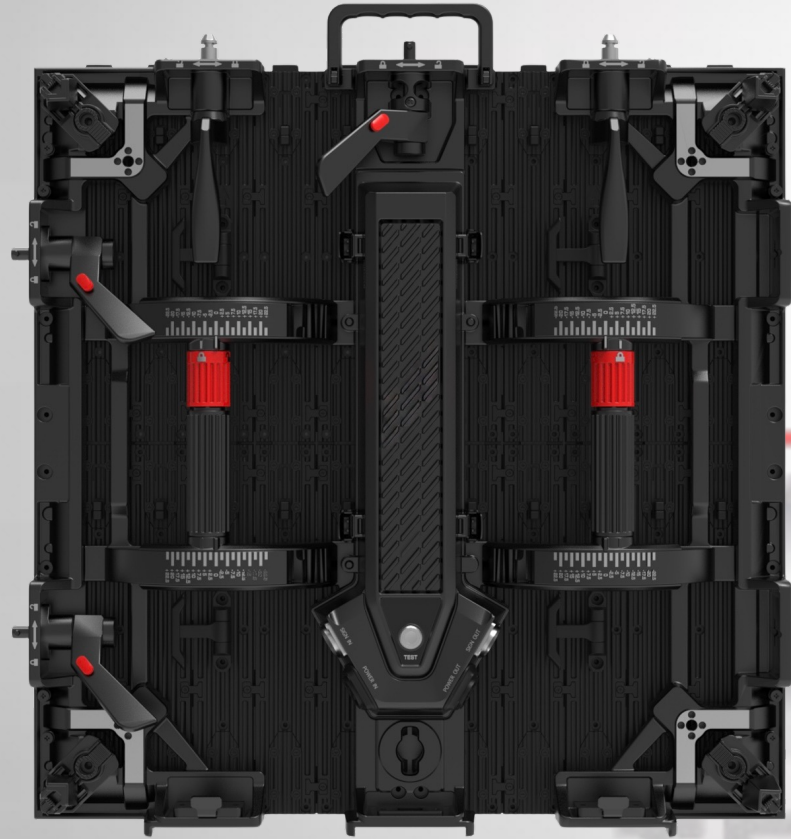

Indoor

P1.5 ~ P3.9

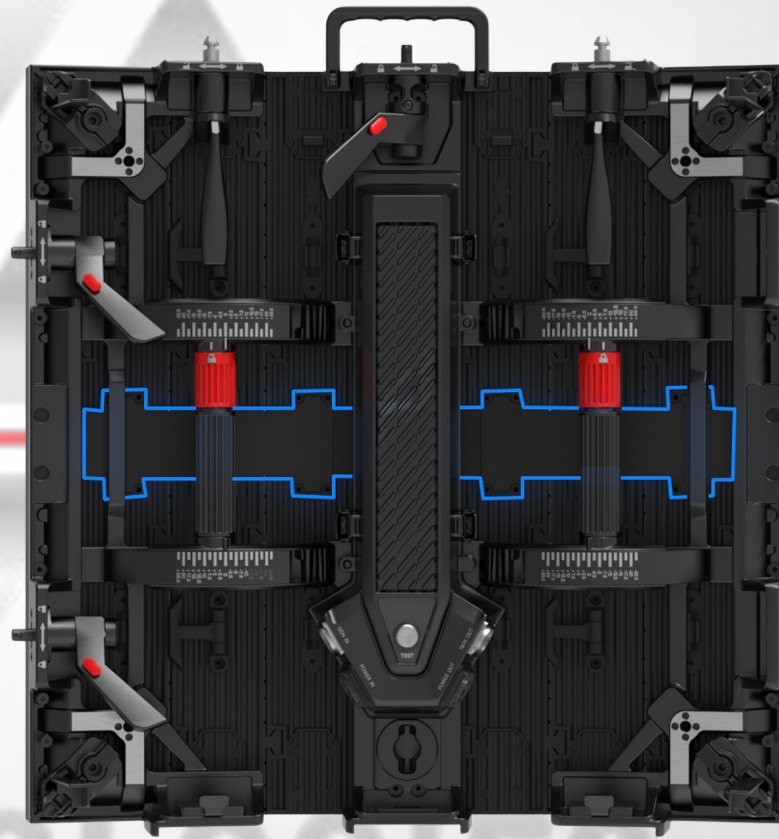

Outdoor

P2.9 ~ P3.9

\* Promising waterproof with module flat cable.

TECHNOLOGIES

# TECHNICAL PARAMETERS

|                                  |                                                   |           |           |           |           |           |                |            |
|----------------------------------|---------------------------------------------------|-----------|-----------|-----------|-----------|-----------|----------------|------------|
| Model No.                        | SNAKE 1.9                                         | SNAKE 1.5 | SNAKE 1.9 | SNAKE 2.6 | SNAKE 2.9 | SNAKE 3.9 | SNAKE 2.9      | SNAKE 3.9  |
| Application                      | Indoor (IP30)                                     |           |           |           |           |           | Outdoor (IP65) |            |
| Pixel Pitch (mm)                 | 1,953                                             | 1,5625    | 1,953     | 2,604     | 2,976     | 3,906     | 2,976          | 3,906      |
| LED Encapsulation                | SMD 1212                                          | SMD 1212  | SMD 1212  | SMD 1515  | SMD 2121  | SMD 2121  | SMD 1415       | SMD 1921   |
| Scan Mode                        | 1/16 scan                                         | 1/40 scan | 1/32 scan | 1/24 scan | 1/28 scan | 1/16 scan | 1/14 scan      | 1/8 scan   |
| Brightness (nits)                | 1,200 nits                                        | 600 nits  | 700 nits  | 800 nits  | 800 nits  | 800 nits  | 5,000 nits     | 5,500 nits |
| Pixel Density (dot/m2)           | 262.144                                           | 409.600   | 262.144   | 147.456   | 112.896   | 65.536    | 112.896        | 65.536     |
| Module Size (mm)                 | 500 x 250                                         |           |           |           |           |           | 500 x 250      |            |
| Module Resolution                | 128 x 128                                         | 160 x 160 | 128 x 128 | 96 x 96   | 84 x 84   | 64 x 64   | 84 x 84        | 64 x 64    |
| Cabinet Size (mm)                | 500 x 500                                         |           |           |           |           |           | 500 x 500      |            |
| Cabinet Resolution               | 256 x 256                                         | 320 x 320 | 256 x 256 | 192 x 192 | 168 x 168 | 128 x 128 | 168 x 168      | 128 x 128  |
| Maximum Power Consumption (W/m2) | 720                                               | 600       | 600       | 500       | 500       | 500       | 850            | 800        |
| Average Power Consumption (W/m2) | 360                                               | 225       | 225       | 200       | 200       | 200       | 320            | 320        |
| Cabinet weight (kg)              | 7.5kg                                             |           |           |           |           |           | 8.5 kg         |            |
| Refresh Rates (Hz)               | 7,680 Hz                                          | 3,840 Hz  |           |           |           |           |                |            |
| Grey Level                       | 22 bit                                            | 16 bit    |           |           |           |           |                |            |
| LED Control System               | Novastar A series (A10PLUS for SNAKE application) |           |           |           |           |           |                |            |