


TECHNICAL SPECIFICATION

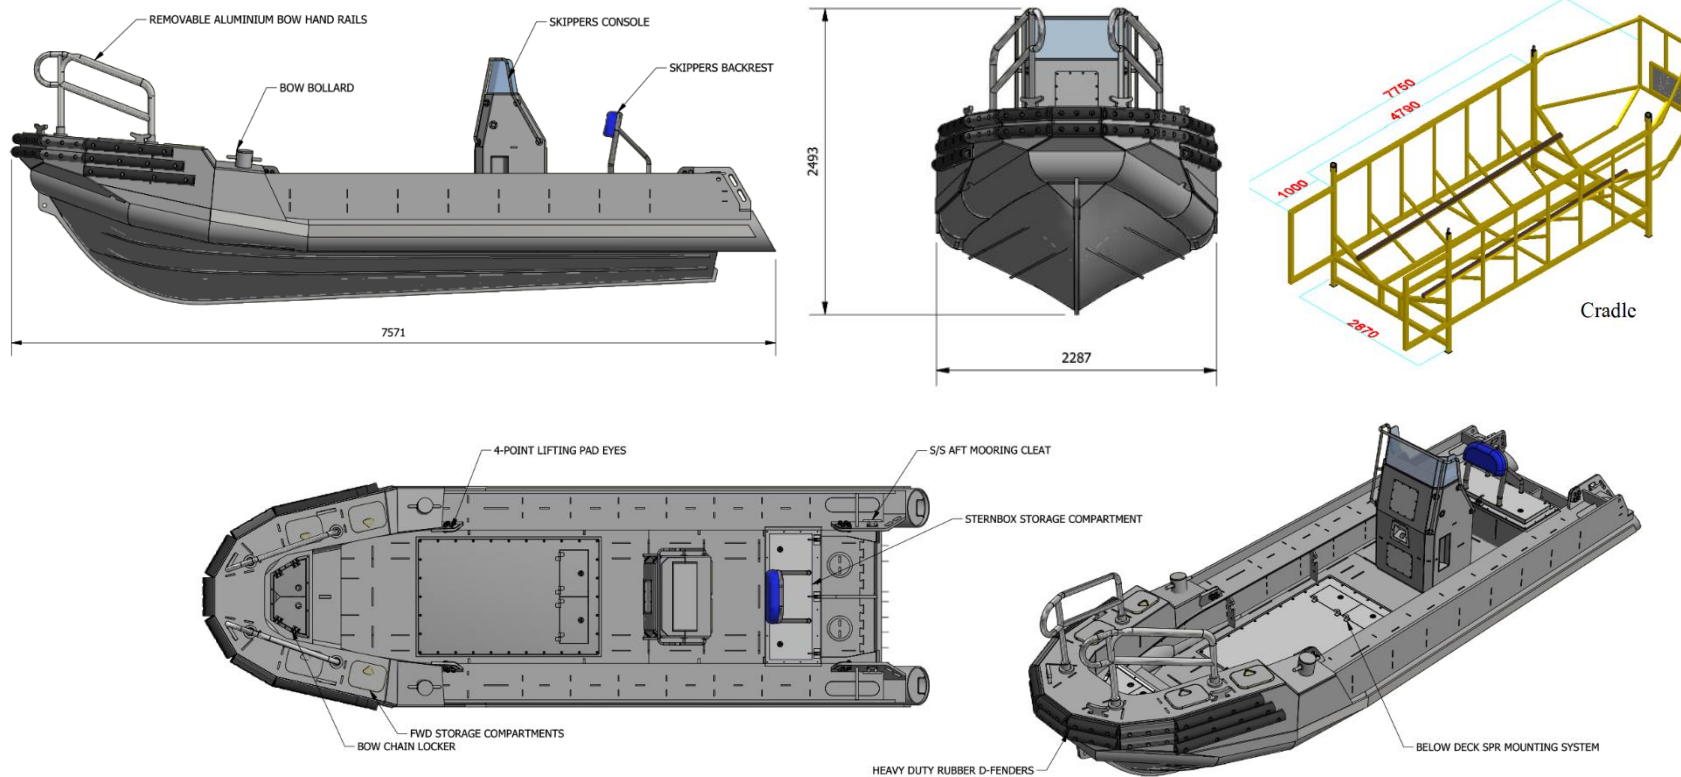

HDPE Rhino boat with integrated SRP Unit

Six Alliance Co. Ltd

Road No 114,
1st Jubail Industrial Area,
Al Jubail -39161,
Kingdom of Saudi Arabia
Tel: +966 55 134 5338
www.six-alliance.com

Copyright: Six Alliance Co.
Ltd 2021



PRINCIPAL PARTICULARS

<u>Rhino Boat</u>		<u>Cradle</u>	
Class	: Work boat	Dimensions	: 2,400 (H) x 7,750(L) x 2,780 (W)
Material	: High Density Polyethylene	Safe working load	: 3,700 Kg
ISO Design Category	: Category B	Payload	: 2,500 Kg
Length Overall	: 7.57 m	Max Gross weight	: 3,700 Kg
Breadth	: 2.29 m	Lifting	: 4-point lifting
Depth- Hand Rail to Keel	: 2.47 m		
Light Draft	: 0.35m		
Weight	: 2,200 Kg		
Rec. Max Payload	: 2,140 Kg		
Sealed Buoyancy Compartments	: 7		
Max Personnel Capacity	: 9 Pax (8 crew 1 + 1 Coxswain)		

Property of Six Alliance Co. Ltd

MAIN MACHINERIES & EQUIPMENT

Main Propulsion : 2 x 40 HP Yanmar Outboards (D40) c/w guards for propellers.
Dive Spread : Integrated SRP bottles.

PHOTOGRAPHS



Property of Six Alliance Co. Ltd