



BQ Model - Torque Wrench with Quick Release

- Accuracy is $\pm 4\%$ from 20-100% of capacity.
- All metal structure, alloy steel pipe, durable.
- Clear scale, easy to read.
- Minor scale is 1/10 of increment of main scale.
- Pull to unlock lock ring keeps selected torque secure from accidental change.
- Quick release head.
- Grooved non-slip grip.

BQLM-QR

With Reversible Ratchet Head

Bi-directional operation, 8 degrees swing, suitable for confined space



Item No.	Square Drive	Torque Range		Increment	Length	Width	Weight
		N.m	Lb.ft				
BQLM260-QR	3/8"	10-60	5-45	0.5	396	32	0.96
BQLM360-QR	1/2"	10-60	5-45	0.5	396	42	0.96
BQLM3100-QR	1/2"	20-100	5-75	0.5	435	32	1.04
BQLM3150-QR	1/2"	30-150	10-110	1	468	42	1.05
BQLM3220-QR	1/2"	40-220	15-165	1	507	42	1.16
BQLM3350-QR	1/2"	70-350	40-265	2	567	42	1.34
BQLM3400-QR-IN	1/2"	80-400	30-300	2	700	42	1.43

BMH-QR

With Rectangular Shank Head Holder

for 9x12mm, 14x18mm rectangular shank head inserts



Item No.	Shank Size	Torque Range		Increment	Length	Width	Weight
		N.m	Lb.ft				
BMH960-QR	9x12	10-60	5-45	0.5	390.5	22	0.96
BMH9100-QR	9x12	20-100	5-75	0.5	445.5	22	1.04
BMH14150-QR	14x18	30-150	10-110	1	460	32	1.05
BMH14220-QR	14x18	40-220	15-165	1	481	32	1.16
BMH14350-QR	14x18	70-350	40-265	2	544	32	1.34
BMH14400-QR-IN	14x18	80-400	30-300	2	700	32	1.43

Mini Size for BQLM-QR

Item No.	Square Drive	Torque Range		Increment	Length	Width	Weight
		N.m	Lb.in				
BQLSM15-QR	1/4"	1.0-5	5-45	0.05	217	28	0.3
BQLSM110-QR	1/4"	2.0-10	20-90	0.1	227	28	0.32
BQLSM125-QR	1/4"	5.0-25	40-220	0.2	265	28	0.33
BQLSM225-QR	3/8"	5.0-25	40-220	0.2	265	28	0.35


Mini Size for BMH-QR

Item No.	Shank Size	Torque Range		Increment	Length	Width	Weight
		N.m	Lb.in				
BMH95S-QR	9x12	1.0-5	5-45	0.05	200	22	0.32
BMH910S-QR	9x12	2.0-10	20-90	0.1	210	22	0.33
BMH925S-QR	9x12	5.0-25	40-220	0.2	248	22	0.35

Note: Due to the product improvement, the technical parameters are subject to variation, please confirm with the supplier when placing an order.

100% Calibrated

Unique serial number for each torque wrench, corresponding to the certificate of calibration

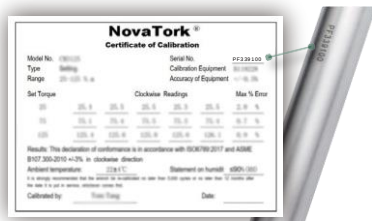

Shockproof packaging

Specially designed for all series of "NovaTork" torque products

