




EJ Series Electronic Torque Wrench

- Accuracy: CW $\pm$ 2%, CCW $\pm$ 3% from 10% to 100% of capacity.
- Display range: 2% to 110% of maximum torque value.
- Units: Lbft, Lbin, Nm.
- Modes: Peak Torque mode, Track mode.
- Target torque can be set.
- LED light and buzzer alarming when reaches target torque.
- Automatic zero clearing when used continuously.
- Optional backlight, good for dark working condition.
- Torque error% display function.
- Battery level display.
- Automatically shut off after 2 minutes of non use.
- 3 Pcs AAA batteries, easy replacement.

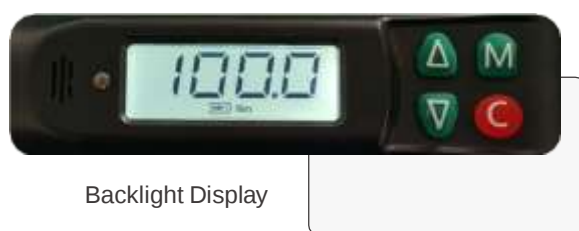

Backlight Display



Cbuufsz replacement



- ✓ 187
- ⊗
- ⚠
- ⊖
- ⚡
- Nm Lb.in Lb.ft
- Torque unit
- Battery level
- Less than the required torque
- The required torque is exceeded
- Track mode
- Error%
- The required torque is achieved

EJM Model

Reversible Ratchet Head Torque Wrench

Both directions, 8° swing suitable for confined space

EJ Model (English Unit)



Item No.	Square Drive	Torque Range		Length mm	Width mm	Weight kg
		N.m	Lb.ft			
EJM120	1/4"	2-20	17.7-177*	427	38	0.88
EJM230	3/8"	3-30	26.6-266*	427	38	0.88
EJM250	3/8"	5-50	44.3-443*	452	38	0.93
EJM2100	3/8"	10-100	7.4-73.8	482	38	1
EJM3200	1/2"	20-200	14.8-148	522	40	1.12
EJM3300	1/2"	30-300	22.1-221	590	40	1.27
EJM4400	3/4"	40-400	29.5-295	795	57	3.3
EJM4600	3/4"	60-600	44.3-443	1050	60	4.6
EJM4800	3/4"	80-800	59.0-590	1250	60	5.2
EJM41000	3/4"	100-1000	73.8-738	1250	60	5.2

*Unit is Lb.in

English

Item No.	Square Drive	Torque Range		Length mm	Width mm	Weight kg
		Lb.ft	N.m			
EJ1200	1/4"	20-200*	2.3-22.6	427	38	0.88
EJ2250	3/8"	25-250*	2.8-28.2	427	38	0.88
EJ2450	3/8"	45-450*	5.1-50.8	452	38	0.88
EJ2100	3/8"	10-100	13.6-136	482	38	1
EJ3150	1/2"	15-150	20.3-203	522	40	1.12
EJ3250	1/2"	25-250	33.9-339	590	40	1.27

*Unit is Lb.in

EJMH Model

Rectangular Shank Head Holder Torque Wrench

For rectangular shank head inserts

EJH Model (English Unit)



Metric

Item No.	Shank Size mm	Torque Range		Length mm	Width mm	Weight kg
		N.m	Lb.ft			
EJMH920	9×12	2-20	17.7-177*	399	24	0.82
EJMH930	9×12	3-30	26.6-266*	399	24	0.82
EJMH950	9×12	5-50	44.3-443*	423	24	0.87
EJMH9100	9×12	10-100	7.4-73.8	453	24	0.93
EJMH14200	14×18	20-200	14.8-148	506	32	1.08
EJMH14300	14×18	30-300	22.1-221	575	32	1.25
EJMH14400	14×18	40-400	29.5-295	780	32	3
EJMH24600	24×32	60-600	44.3-443	1050	56	4.5
EJMH24800	24×32	80-800	59.0-590	1250	56	5
EJMH241000	24×32	100-1000	73.8-738	1250	56	5.1

*Unit is Lb.in

English

Item No.	Shank Size mm	Torque Range		Length mm	Width mm	Weight kg
		Lb.ft	N.m			
EJH9200	9×12	20-200*	2.3-22.6	399	24	0.82
EJH9250	9×12	25-250*	2.8-28.2	399	24	0.82
EJH9450	9×12	45-450*	5.1-50.8	423	24	0.87
EJH9100	9×12	10-100	13.6-136	453	24	0.93
EJH14150	14×18	15-150	20.3-203	506	32	1.08
EJH14250	14×18	25-250	33.9-339	575	32	1.25

*Unit is Lb.in

EJML Model

Teardrop Ratchet Head Torque Wrench

Both directions, easily operated reverse lever

EJL Model (English Unit)



Metric

Item No.	Square Drive	Torque Range		Length mm	Width mm	Weight kg
		N.m	Lb.ft			
EJML120	1/4"	2-20	17.7-177*	417	25	0.9
EJML230	3/8"	3-30	26.6-266*	431	38	0.95
EJML250	3/8"	5-50	44.3-443*	456	38	1.01
EJML2100	3/8"	10-100	7.4-73.8	486	38	1.08
EJML3200	1/2"	20-200	14.8-148	531	40	1.17
EJML3300	1/2"	30-300	22.1-221	599	40	1.33

*Unit is Lb.in

English

Item No.	Square Drive	Torque Range		Length mm	Width mm	Weight kg
		Lb.ft	N.m			
EJL1200	1/4"	20-200*	2.3-22.6	417	25	0.9
EJL2250	3/8"	25-250*	2.8-28.2	431	38	0.95
EJL2450	3/8"	45-450*	5.1-50.8	456	38	1.01
EJL2100	3/8"	20-100	13.6-136	486	38	1.08
EJL3150	1/2"	30-150	20.3-203	531	40	1.17
EJL3250	1/2"	50-250	33.9-339	599	40	1.33

*Unit is Lb.in

100% Calibrated

Unique serial number for each torque wrench, corresponding to the certificate of calibration

