


Vantageo 2230-RA

Flexible, Scalable, and Secure

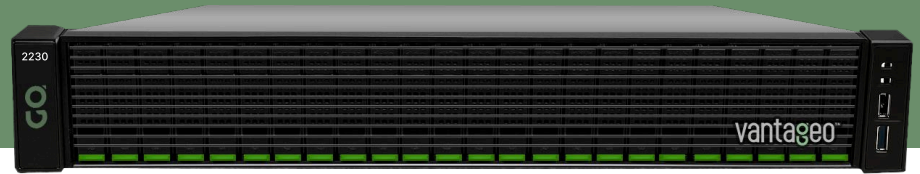

A 2U 24-bay high-density storage server solution. It supports 3rd Gen Intel® Xeon® Scalable Processors with PCIe 4.0 extension design. It has Front-to-back airflow and hot-swap redundant fans to provide optimal thermal conditions and Onboard Baseboard Management Controller for system management and IPMI control.

Key Features

1. 2U 24-Bay high density storage server barebone
2. Supports 3rd Gen. Intel® Xeon® Scalable processors (Ice Lake)
3. Intel® C621A Chipset to provide 5+ years product life cycle
4. Onboard Baseboard Management Controller for system management and IPMI control
5. Dedicated BMC management port
6. Front-to-back airflow and hot swap redundant fans to provide optimal thermal conditions

Vantageo 2230-RA	
Features	Technical Specification
Processor	3rd Gen Intel® Xeon® Scalable Processors (Ice Lake) Supports CPU TDP up to 270W *Use over 165W CPU, please contact AIC Technical Support for more info/details about optimized CPUs and specialized system.QPI Speeds : 11.2 GT/sSocket Type : Socket P+ (LGA-4189)
Chipset Support	Intel® C621A Chipset
System Memory	8 x memory channels per CPU, 1 x DIMM per channel 16 x DIMM slots support: DDR4 REG ECC 3200/2933/2666 Intel® Optane™ Persistent Memory 200 (Barlow Pass) support
Front Panel	System power on/off System ID System reset 1x USB 3.0 Type A
LEDs	Power status System alert LAN activity Drive activity System ID
Drive Bays	External : 24 x 2.5" SATA/SAS3/NVMe (15mm, front) 2 x 2.5" SATA hot-swap (7mm, rear) Internal : 2 x M.2(NGFF)/M-Key/2280
Expansion Slots (PCIe 4.0)	3 x PCIe X16 slots (HHHL) + 1 x OCP 3.0 2 x PCIe X8 slots (HHHL)
System BIOS	BIOS Type : AMI UEFI BIOS SPI (Serial Peripheral Interface) FLASH Interface BIOS Features : ACPI PXE WOL AC loss recovery IPMI 2.0 KCS interface SMBIOS Serial console redirection BIOS Boot BIOS Recovery Mode SRIOV iSCSI TPM PCIe NTB
Rear I/O	LAN: 1 x GbE RJ45 1 x GbE RJ45 dedicated to BMC managementUSB: 2 x USB 3.0 Type AVGA: 1 x external DB-15 VGA portSerial Port: 1 x external COM port phone jack

Disclaimer: Technical data is subject to modification and delivery subject to availability. . Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.

Vantageo 2230-RA	
Features	Technical Specification
On-board Devices	SATA / SAS : Intel® C621A PCH on-chip solution 8 x SATA 6.0 Gb/s (by 2 x mini-SAS) 2 x SATA 6.0 Gb/s (by 2 x SATA 7 pin) Optional SAS 3008/3108 modules (on OCP)IPMI : Aspeed AST2500 Advanced PCIe Graphics & Remote Management Processor Baseboard Management Controller Intelligent Platform Interface 2.0 (IPMI 2.0) iKVM, Media Redirection, IPMI over LAN, Serial over LAN SMASH SupportNetwork Controllers : Realtek RTL8211E GbE for BMC dedicated management port Intel I210 GbE for BMC shared NIC management port by onboard connector (NCSI shared NIC - reserved for OCP V3.0)Graphics : Aspeed AST2500 Advanced PCIe Graphics & Remote Management Processor PCIe VGA/2D Controller 1920x1200@60Hz 32bpp
Power Supply	1200W 1+1 redundant power supply 80+ Platinum AC INPUT : 100~240V,50/60Hz,10-5A
System Cooling	6 x 60x38mm easy swap fans
System Management	IPMI 2.0 <ul style="list-style-type: none">• KVM over IP• Media redirection• Temperature, fan, voltage, PSU sensor monitor• System temperature• System ID/System fail indicator• Remote power on/off/reset• SEL message alarm through mail• SNMP support• Intel NM
operating Environment	Storage temperature: -10°C(14°F) ~ 60°C(140°F) Operating temperature: 0°C(32°F) ~ 35°C(95°F) Storage operating humidity: 5%~95% non-condensing
Gross Weight (w/PSU & Rail)	kgs : 25.4 lbs : 56
Packaging Dimensions (W x D x H)	mm : 605 x 880 x 322 inches : 23.8 x 34.7 x 12.7
Mounting	Standard : 28" tool-less slide rail
Recommended support	24x7 - 4 hours Response, Next Business Day Call to Resolution CTR 24x7 - 4 hours Response, 24 Hours Call to Resolution CTR 24x7 - 4 Hours Response, 6 Hours Call to Resolution CTR

Disclaimer: Technical data is subject to modification and delivery subject to availability. . Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.