



PT. KHAMEL ENERGI SERVICE
Petroleum & Energy Services




PT KHAMEL ENERGI SERVICE



Solution at better value

National Presence

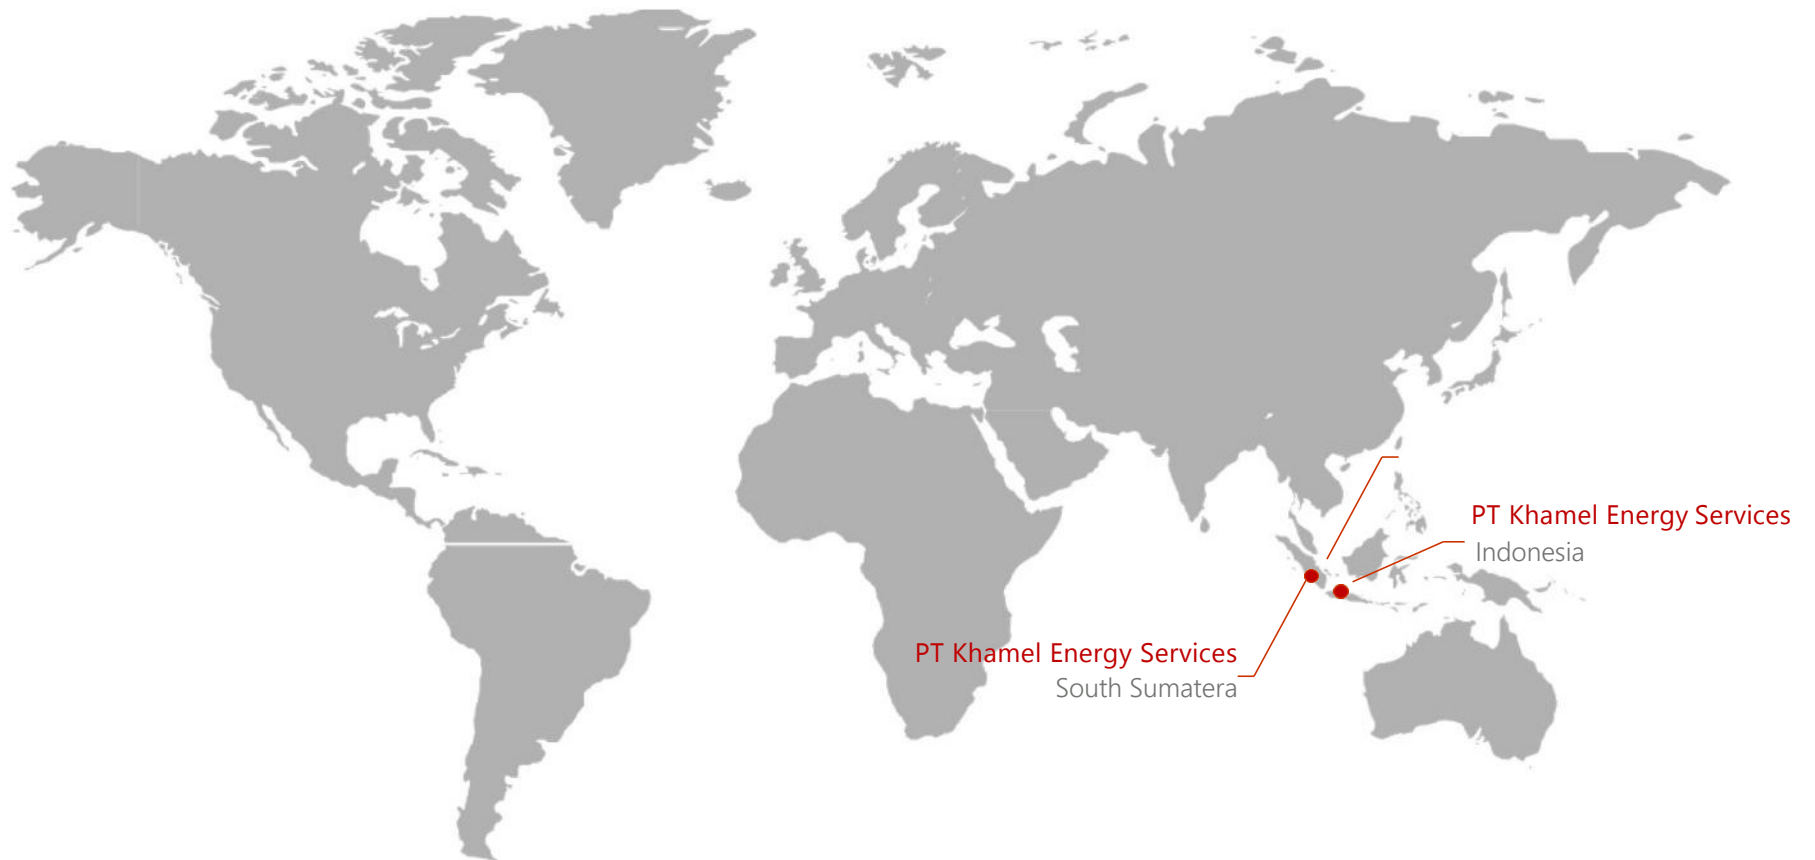



PT. KHAMEL ENERGI SERVICE


Petroleum & Energy Services

VISION



To become technical
solutions partner for most
of the Oil/Gas companies worldwide

MISSION



Oilfield Solutions
at Better Value



PT. KHAMEL ENERGI SERVICE

Petroleum & Energy Services

About Us

Our Uniqueness



EXPERIENCE TECHNICAL TEAM

Design, manufacture, and provide the unique and cost effective products and services



PROVEN PRODUCTS/SERVICES

Come-up with engineering and supply solutions to improve the product, delivery, and quality performance



COMMITMENT FOR EXCELLENCE IN AFTER SALES

Trusted by clients worldwide with many years of service performance



EXCELLENT NETWORK TO FIND RIGHT SOLUTIONS

Provide hard-to-find drilling tools and equipment and critical in operation



RESOURCES AND FACILITIES TO MEET CLIENT NEEDS

We have our own offices/teams in South Sumatera and Jakarta



PT. KHAMEL ENERGI SERVICE

Petroleum & Energy Services

COMPANY INTRODUCING

OUR COMPANY

PT. Khamel Energi Service is an organization that provides products/services related to Oil and Gas Services especially in production facility and well testing in exploration well. Our company is under KHAMEL Group which was established since 2021 with the aim to provide our customers with the best products and services available, our branding named KHAMEL has been working rigorously to achieve the best results.

OUR PRODUCTS AND SERVICES

Our products/services have been carefully designed by our workforce, with the customer's comfort in mind. The most demanded product and service of our business is Mining, Oil and Gas Facilities, Vessel Separators, various capacity of Storage Tanks, Gas Scrubber, Heat Exchanger, Boiler, Flare Stake, Piping System, Slick Line, EMR , Chemical, and other supporting equipment for oil and gas production facility, and well testing for well exploration.

Manufacturing

Threading for Casing & Tubing Connections

Licensed under API 5CT for threading of casing & tubing.




PT. KHAMEL ENERGI SERVICE
Petroleum & Energy Services



Manufacturing Wellhead & Christmas Tree Equipments

Scope Of Service;

- Casing and Tubing Heads
- Crossover Connectors
- Blind and Test Flanges
- Tees and Crosses
- Top Connectors
- Adapter Spools and Spacer Spools
- Slip Type Hangers
- Mandrel Type Hangers
- Gate, Ball, Plug Valves
- PSL 1, PSL 2, PSL 3

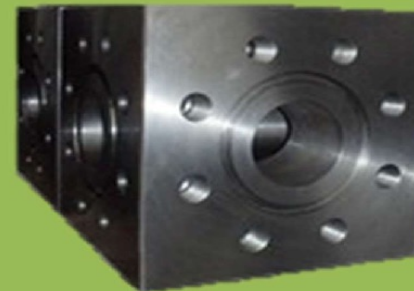



PT. KHAMEL ENERGI SERVICE

Petroleum & Energy Services

PIPE

PROVIDING THE BEST SOLUTIONS

Pipes are produced by high-frequency welding from carbon and low-alloy grades: up to X70.

During production pipes undergo multi-stage non-destructive testing, acceptance mechanical tests of base metal and weld and 100% hydraulic pressure test.





Oil & Gas Line Pipes

| Standard | Outside dia., inch (mm) | Wall thickness, mm | Steel grade | Scope of application |
|--------------------------------|-------------------------|--------------------|-------------|---------------------------------------|
| API Spec 5L / ISO 3183:2012 | 8% (219.1) | 4.8–12.7 | up to X70 | Oil & Gas and Water transportation |
| | 10% (273.0) | | | |
| | 12% (323.9) | | | |
| | 14 (355.6) | 5.6–12.7 | | |
| | 16 (406.4) | 6.3–12.7 | | |
| | 18 (457.0) | | | |
| DIN EN 10219-1(2) | 20 (508.0) | | | |
| | 8% (219.1) | 4.5–12.5 | S235 - S460 | For multi-purpose structures |
| | 10% (273.0) | 5.0–12.5 | | |
| | 12% (323.9) | | | |
| | 14 (355.6) | 5.6–12.5 | | |
| | 16 (406.4) | 6.3–12.5 | | |
| 18 (457.0) | | | | |
| DIN EN 10217-1, 2, 3 | 20 (508.0) | | | |
| | 8% (219.1) | 4.5–12.5 | P195 – P460 | Multi-purpose |
| | 10% (273.0) | 5.0–12.5 | | |
| | 12% (323.9) | | | |
| | 14 (355.6) | 5.6–12.5 | | |
| | 16 (406.4) | 6.3–12.5 | | |
| 18 (457.0) | | | | |
| | 20 (508.0) | | | |



Offshore Container

Portable unit for repeated use in the transport of goods or equipment handled in open seas to, from and between fixed and/or floating installations and ships. There are 3 categories:

- Offshore Freight Container
- Offshore Service Container
- Offshore Waste Skip

Offshore Tool Box

- 6ft x 5ft x 3ft x SWL 2.5 T
- 3,5m x 1.2m x 0.9m x SWL 3.5 T

Container / Cabin

Container in various size:

- 20' x 8' x 8'-6"
- 10' x 8' x 8'-6"
- 8' x 8' x 8'-6"

Dog House

Steel Sided room , usually having an access door close to the driller's controls. This general purpose shelter is a combination tool shed, office, etc.

Offshore Cradle Drum

1.68m x 1,42m x 1.28m x SWL 6T

Offshore Cargo Basket

- 45ft x 3.8ft x 4.3ft x SWL 10 T
- 20ft x 4ft x 3ft x SWL 6 T
- 12ft x 3.6ft x 1.5ft x SWL 3T
- 25ft x 3.4ft x 2.3ft x SWL 6T
- 10ft x 6ft x 4ft x SWL 6T
- 20ft x 8ft x 4ft x SWL 10T
- 40ft x 4ft x 4ft x SWL 10T

Offshore Explosive Bunkers

- 1.1m x 1.1m x 2m x SWL 1 T
- 1.1m x 1.1m x 1.2m x SWL .5 T



PT. KAMEL ENERGI SERVICE
Petroleum & Energy Services



Offshore Basket



Offshore Tool Basket



Shipping Skid



Half Height Open Top Container



Fuel Tank



Open Top Container



Oxygen Racks



Workshop Container



Offshore Basket Galvanized



WELL TESTING & PRODUCTION FACILITY

1440 PSI THREE-PHASE HORIZONTAL TEST SEPARATOR

| General Specifications | ASME VIII Div. 1 |
|--------------------------------|--------------------------------------------------------------------|
| ANSI | 600 |
| Nominal Vessel Size | 48" ID X 15' S/S |
| Maximum Operation Pressure | 1440 PSI/9928 kPa |
| Flow Rate Capacity | 100 mmcf/day gas & 10,000 bbl (1,592 m3) /day @ 2 minute retention |
| Inlet | 4" Hammer union Fig. 206 Female / 8" RF flange ANSI 600 Capable |
| Gas Outlet | 4" Hammer union Fig. 206 Male / 8" RF flange ANSI 600 Capable |
| Fluid Outlet | 4" Hammer union Fig. 206 Male |
| Min. Operating Temperature | -46C (-51F) |
| Max Operating Temperature | 54C (129F) |
| Overall Dimensions (L x W x H) | 53' X 8'6" X 12'6" |
| Aprox. Empty Weight | 60,000 lbs. |



WIRELINER & SLICKLINER

The double drum wireline is SSR manufacture featuring;

- ◆ Dual Drum capability for 0.125" slickline and 7/32 and 3/16" braided cables
- ◆ 79 HP
- ◆ Smart Monitor system
 - Line Speed
 - Line Tension
 - Depth
 - Over Tension Shutdown
- ◆ Lighting on cabin, engine bay, winch bay
- ◆ 4 speed gear box
- ◆ Open loop system
- ◆ 6000 series measuring head
- ◆ Martin Decker load cell / veeder root counter (back up)
- ◆ Air Start system
- ◆ Roof hatch (for drum removal)

| Item | Size | Connection Type | Tool Description | Quantity |
|------|-------|----------------------------|-------------------------------------|----------|
| 1 | 0.125 | 5-3/4" | Stuffing boxes | 2 |
| 2 | 3"ID | 5-3/4" | 8ft Lubricator sections | 9 |
| 3 | 3"ID | 5-3/4" | 1 x Hydraulic BOP | 1 |
| 4 | 3"ID | 4-3/4" | 1 x Manual BOP c/w | 1 |
| 5 | 3"ID | 4 3/4" Bowen x 5 3/4" Otis | Lubricator crossovers | 2 |
| 6 | 3"ID | | Cross overs 5.75" x 2 7/8" EUE pin. | 2 |
| 7 | 3"ID | 5-3/4" | Pump in Tees. | 2 |





PT. KHAMEL ENERGI SERVICE

Petroleum & Energy Services

TRANSFER PUMP

PROVIDING THE BEST SOLUTIONS

Our product line for marine application include horizontal and vertical end suction, axial split, self priming low NPSHr centrifugal pumps, triplex plunger are built in accordance with ASTM F 998, USCG and can be supplied with BV, ABS, DNV, Lloyd's classification certificate







PUMPS

| Model | Dimensions L x W x H | Max. output *** | Running power consumption | Connection in, out | Weight | Order number 115 V | Order number 230 V | Order number 400 V |
|-------------------------------|-------------------------------------------------|-----------------------------|-----------------------------------------------|--------------------------|--------------------|-----------------------|-----------------------|-----------------------|
| Magnetic Drive Pumps 50/60 Hz | | | | | | | | |
| WB250 | 180 x 95 x 109 mm 7.1 x 3.7 x 4.3 inch | 16 (l/min.) 4.2 (gpm) | 26 W, 0.36 amps (115 V) 0.18 amps (230 V) | Ø 14 mm Ø 14 mm | 1.6 kg 3.5 lbs | WBCL001301 | WBCL001104A | - |
| | 129 x 95 x 134 mm 7.1 x 3.7 x 4.3 inch | 16 (l/min.) 4.2 (gpm) | 26 W 0.2 amps (230 V) | G 3/4" M G 3/4" M | 1.6 kg 3.5 lbs | - | WBCL001090B* | - |
| WB350 | 200 x 106 x 105 mm 8.2 x 4.2 x 4.2 inch | 27 (l/min.) 7.1 (gpm) | 40 W, 0.48 amps (115 V) 0.24 amps (230 V) | Ø 18 mm Ø 17 mm | 2 kg 4.4 lbs | WBCL001302A | WBCL001105A | - |
| | 203 x 106 x 107 mm 8.1 x 4.2 x 4.2 inch | 27 (l/min.) 7.1 (gpm) | 45 W 0.24 amps (230 V) | G 3/4" M G 3/4" M | 2 kg 4.4 lbs | - | WBCL0010805A* | - |
| WB500 | 248 x 120 x 130 mm 9.8 x 4.8 x 5.2 inch | 32 (l/min.) 8.4 (gpm) | 60 W 0.4 amps (230 V) | G 3/4" M G 3/4" M | 3.5 kg 7.8 lbs | - | WBCL001101A | - |
| | 248 x 120 x 130 mm 9.8 x 4.8 x 5.2 inch | 32 (l/min.) 8.4 (gpm) | 60 W 0.4 amps (230 V) | G 3/4" M G 3/4" M | 3.5 kg 7.8 lbs | - | WBCL0010810A* | - |
| WB1000 | 250 x 120 x 130 mm 9.9 x 4.8 x 5.2 inch | 45 (l/min.) 11.8 (gpm) | 90 W, 1 amps (115 V) 0.52 amps (230 V) | G 3/4" M G 3/4" M | 3.9 kg 8.6 lbs | WBCL001303A | WBCL001106A | - |
| | 250 x 120 x 130 mm 9.9 x 4.8 x 5.2 inch | 45 (l/min.) 11.8 (gpm) | 90 W, 1 amps (115 V) 0.52 amps (230 V) | G 3/4" M G 3/4" M | 3.9 kg 8.6 lbs | - | WBCL0010820B* | - |
| WB1500 | 258 x 130 x 155 mm 10.2 x 5.2 x 6.1 inch | 86 (l/min.) 22.7 (gpm) | 235 W 1.21 amps (230 V) | G 1" M G 1" M | 6 kg 13.2 lbs | - | WBCL001107A | - |
| WB2000 | 322 x 156 x 175 mm 12.7 x 6.2 x 6.9 inch | 115 (l/min.) 30.3 (gpm) | 345 W 1.93 amps (230 V) | G 1" M G 1" M | 8.5 kg 18.8 lbs | - | WBCL001108A | - |
| Magnetic Drive Pumps 50 Hz | | | | | | | | |
| WB2500 | 423.5 x 149 x 210 mm 16.7 x 5.9 x 8.3 inch | 280 (l/min.) 74 (gpm) | 370 W, 2.4 amps (230 V) 1.1 amps (400 V) | G 1 1/2" M 1 1/2" M | 14 kg 30.9 lbs | - | WBCL001109B | WBCL001111B |
| WB3500 | 473 x 160 x 249 mm 18.9 x 6.3 x 9.8 inch | 320 (l/min.) 84.6 (gpm) | 750 W, 4 amps (230 V) 1.8 amps (400 V) | G 1 1/2" M 1 1/2" M | 22 kg 48.5 lbs | - | WBCL001110B | WBCL001112B |
| WB4000 | 478.5 x 260 x 274 mm 20.1 x 10.3 x 10.8 inch | 450 (l/min.) 118.8 (gpm) | 1,500 W, 7.1 amps (230 V) 3.1 amps (400 V) | G 2" M G 1 1/2" M | 25 kg 55.2 lbs | - | WBCL0010121B | WBCL001136A |
| WB5000 | 478.5 x 260 x 274 mm 22.1 x 10.3 x 10.8 inch | 520 (l/min.) 137.4 (gpm) | 2,200 W 4.5 amps (400 V) | G 2" M G 1 1/2" M | 32 kg 70.5 lbs | - | - | WBCL001139B |
| Bronze Pump 50 Hz | | | | | | | | |
| WB7500** | 382 x 190 x 250 mm 15.1 x 7.5 x 9.9 inch | 400 (l/min.) 105.7 (gpm) | 2,000 W 4.5 Amps (400 V) | G 2" F G 1 1/4" F | 23 kg 50.7 lbs | - | - | WBCL001136 |
| Bronze Pump 60 Hz | | | | | | | | |
| WB7500** | 382 x 190 x 250 mm 15.1 x 7.5 x 9.9 inch | 400 (l/min.) 105.7 (gpm) | 2,000 W 4.5 Amps (400 V) | G 2" F G 1 1/4" F | 23 kg 50.7 lbs | - | - | WBCL001137A |
| Bronze Pumps 50/60 Hz | | | | | | | | |
| WB2500G | 303 x 154 x 161 mm 11.9 x 6.1 x 6.4 inch | 80 (l/min.) 21.1 (gpm) | 550 W 2.5 Amps (230 V) | G 1" F G 1" F | 9 kg 19.9 lbs | - | WBCL001170A | - |
| WB3000G | 303 x 174 x 181 mm 11.9 x 6.9 x 7.2 inch | 125 (l/min.) 33 (gpm) | 1,100 W, 4.9 Amps (230 V) 2.8 Amps (400 V) | G 1" F G 1" F | 10 kg 22.1 lbs | - | WBCL001171A | WBCL001172A |
| WB5000G | 380 x 190 x 240 mm 15 x 7.6 x 9.5 inch | 250 (l/min.) 66 (gpm) | 1,000 W, 6.7 Amps (230 V) 4.5 Amps (400 V) | G 1 1/2" F G 1 1/2" F | 17 kg 37.5 lbs | - | WBCL001173A | WBCL001174A |

* White painted version with threaded hose connections. ** Can only be used for chilled water circulation, not for sea water cooling.
*** Effective water output varies with back pressure. Please respect the pump curves on the next pages in order to ensure the minimum water flows required for your applications.
Note: F = Female thread in inch. M = Male thread in inch.



Model WB2500



Model WB500G/1000G/2800G



Model WB8000/10500


SELF-PRIMING PUMPS

| Model | Dimensions L x W x H | Max. output | Running power consumption | Connection in, out | Weight | Order number 115 V | Order number 230 V | Order number 400 V |
|----------|----------------------------------------------|----------------------------------|------------------------------|-----------------------|--------------------|-----------------------|-----------------------|-----------------------|
| WB250** | 195 x 130 x 130 mm 7.7 x 5.2 x 5.2 inch | 12/3.2 (l/min.) 3.2/0.9 (gpm) | 25 W 0.2 amps (230 V) | 5/8", 16 mm | 1.2 kg 2.7 lbs | - | WBCL001103B | - |
| WB500G | 254 x 120 x 185 mm 10.0 x 4.7 x 7.3 inch | 18 (l/min.) 4.7 (gpm) | 250 W 1.2 amps (230 V) | G 1/2" F G 1/2" F | 6.2 kg | WBCL001306A | WBCL001305A | - |
| WB1000G | 260 x 120 x 143 mm 10.3 x 4.8 x 5.7 inch | 60 (l/min.) 15.8 (gpm) | 370 W 1.7 amps (230 V) | G 3/4" F G 3/4" F | 6.5 kg 14.4 lbs | WBCL001307A | WBCL001092A | - |
| WB3800G | 410 x 215 x 230 mm 16.1 x 8.5 x 9.1 inch | 120 (l/min.) 5.8 (gpm) | 1200 W 5.8 amps (230 V) | G 1 1/4" F | 21 kg | - | WBCL001094A | - |
| WB6000* | 592 x 215 x 302 mm 23.4 x 8.5 x 11.9 inch | 500 (l/min.) 132 (gpm) | 1,600 W 2.9 amps (400 V) | G 2" F G 2" F | 19 kg 41.9 lbs | - | - | WBCL001164A |
| WB10500* | 592 x 215 x 302 mm 23.4 x 8.5 x 11.9 inch | 667 (l/min.) 176 (gpm) | 3,000 W 5.3 amps (400 V) | G 2" F G 2" F | 21 kg 46.3 lbs | - | - | WBCL001165A |

* Contains straight hose nipple 5/8", 16 mm and 90° adaptor for hose nipple

* Can only be used for sea water cooling, not for chilled water circulation

Many Industries = Many Mats

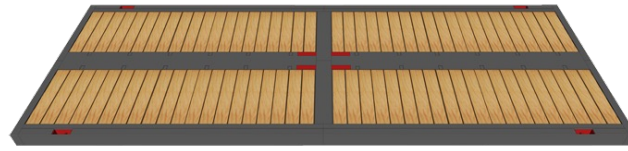


Why Bamboo?

Bamboo sequesters 35% more carbon than its tree counter parts

Bamboo also produces 30% more oxygen than a like sized timber forest area

Bamboo veneer is produced from only mature plants, anywhere from their 3rd to 6th year of life to allow for optimal hardness

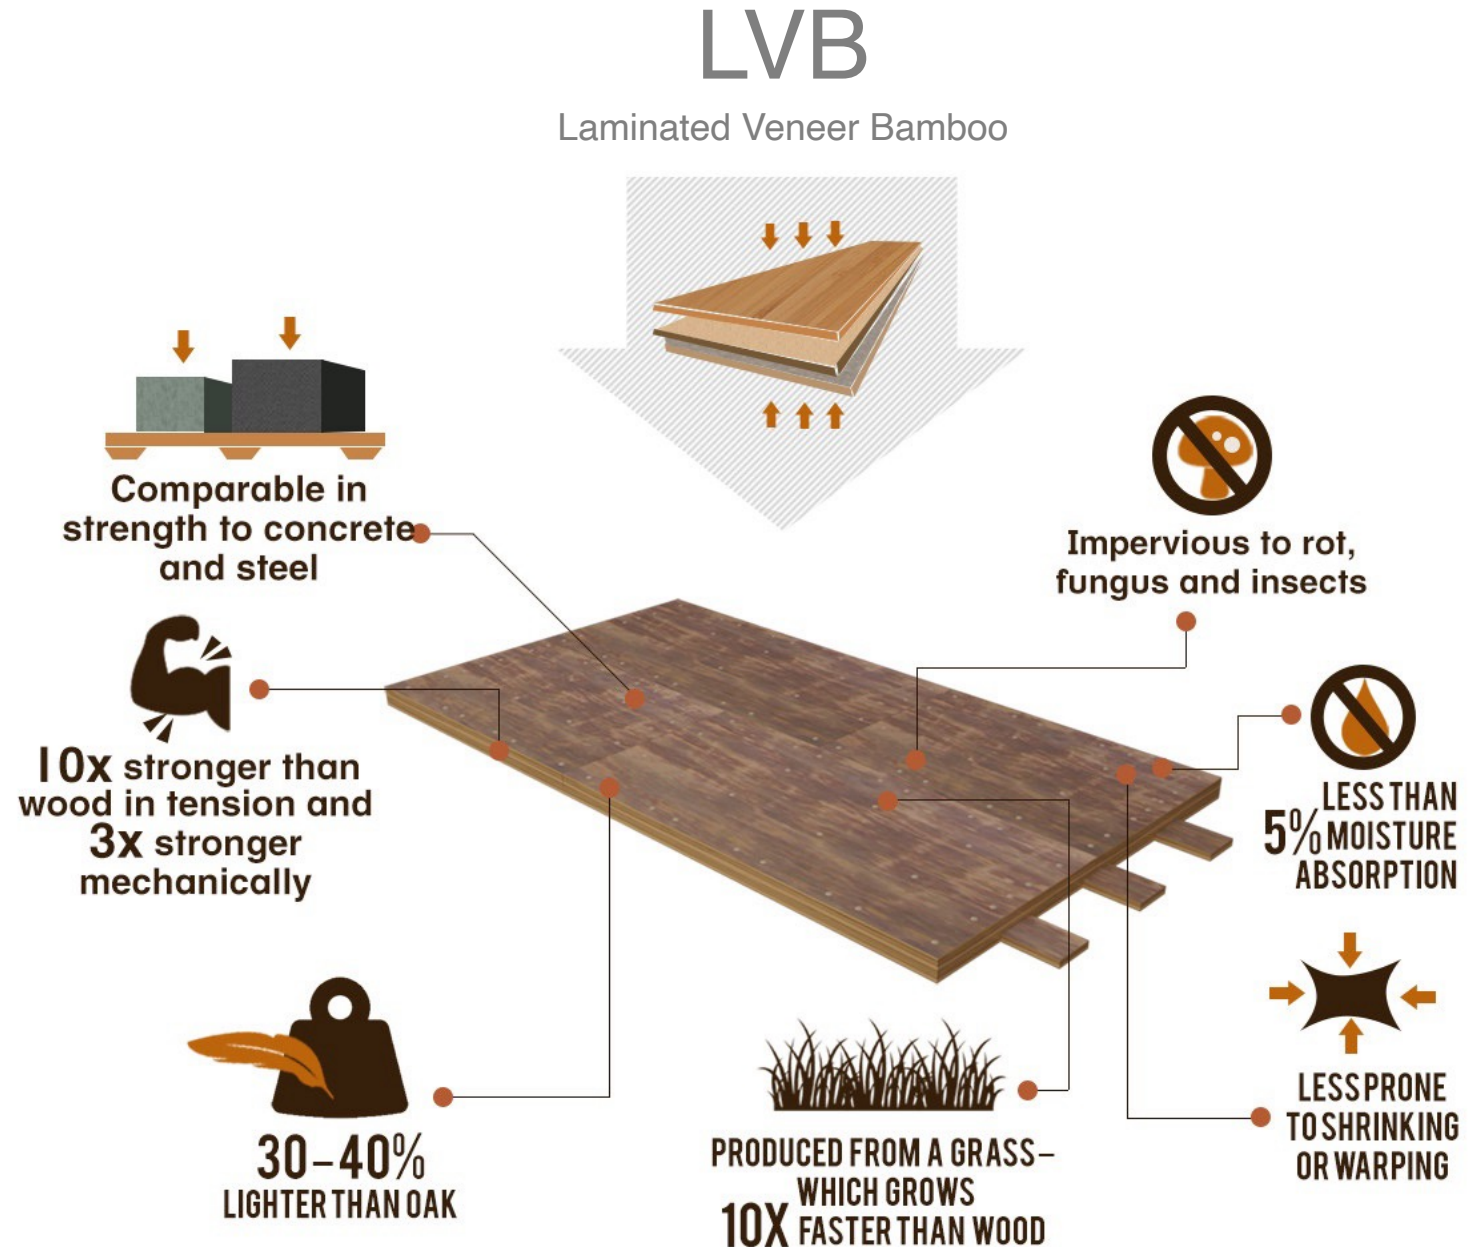

Technical Data



BENEFITS

- Eco-friendly
- Laminated Veneer Bamboo is less prone to shrinking and warping
- Prevents damage to sites in sensitive areas
- Impervious to rot, fungus, and insects
- Comparable to steel and concrete in strength
- 10x stronger than wood in tension and 3x stronger mechanically
- Flexible – bends over uneven ground
- Fast, efficient, and safe installation
- Durable – average 4 years working life
- Easy to clean and store

SPECIFICATIONS

| | |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Product Name | Bamboo Access Mats, Bamboo Road Mats, Bamboo Rig mats, Bamboo Mining Mats, Bamboo Construction Mats, Bamboo Ground Mats |
| Structure | Strand woven, hot pressed |
| Common Size | 3900 x 2200 x 60mm (custom sizes available to order) |
| Moisture Content | ≤ 12%. |
| Density | 1000 – 1100 kg / m ³ |
| Hardness | Brinell > 9.5kg/mm ² |
| Impact Intensity | ≥ 216.1 KJ/m ² |
| Bending Strength | ≥ 193.3 MPa (or N/mm ²) |
| Bending Elasticity Modulus | ≥ 8,100 MPa |
| Expansion Rate or water absorption | ≤ 5% |
| Formaldehyde Emission | 0.01 Ppm. Meets standards of US (CARB P2), EU (SE0) and Japan (F4*) |
| Finish | None or Outdoor Oil |
| Certificates | FSC, BCSI, ISO9001: 2015 |



vs



Fir Mat – 2 years

Crocodile Bamboo Mat – 4 years

NEW TECHNOLOGY INTO TRADITIONAL DESIGN




The original Bamboo Mat

Dimensions: 12.8' x 7.2' x 2.3"
3 Layers - 0.78" each

Weight: 1087 lbs

Flexible, durable, and built to endure
multiple applications in wet and muddy
environments

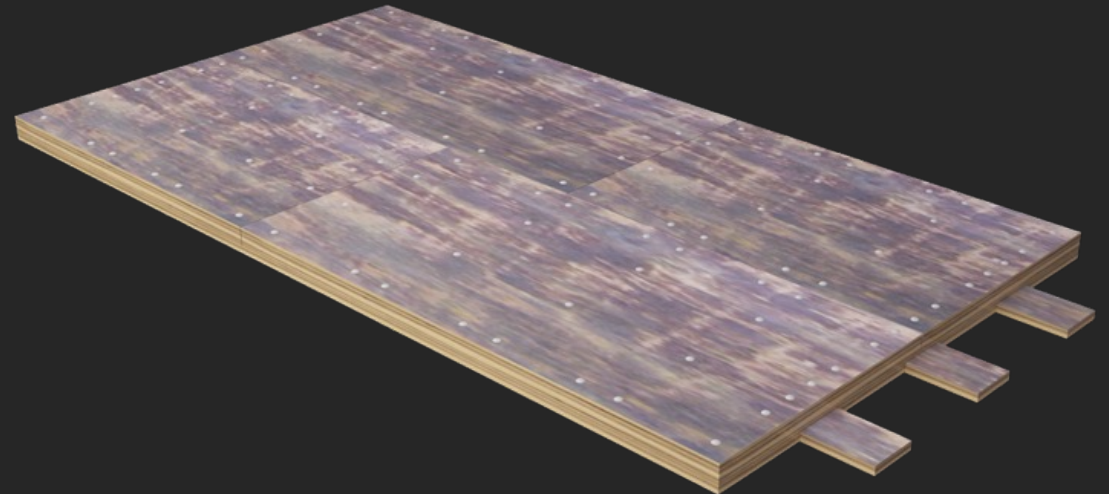


CrocodileProducts
INC.

20ft STEEL RIG MAT



19' x 7' x 4.9"
5900 x 2200 x 125 mm

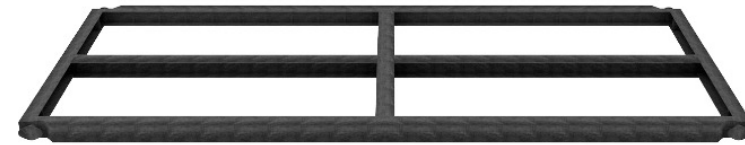

PATENT PENDING






40ft STEEL RIG MAT



Lifting Hooks

39' x 7' x 5.9"
11900 x 2200 x 1500 mm

Patented Door System

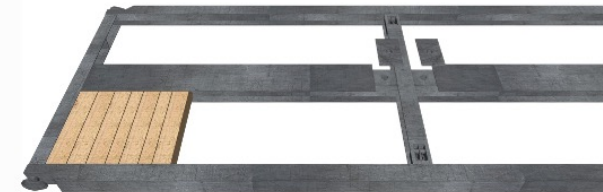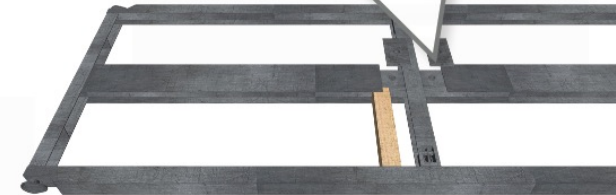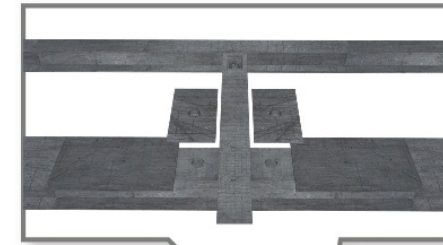

PATENT PENDING



3 LAYER HARDWOOD ACCESS MAT



7' x 12' x 4"
3657 x 2200 x 102 mm


PATENT PENDING



HARDWOOD ACCESS MAT W/ STEEL ENDS




13.8' x 7' x 4"
4200 x 2200 x 100 mm

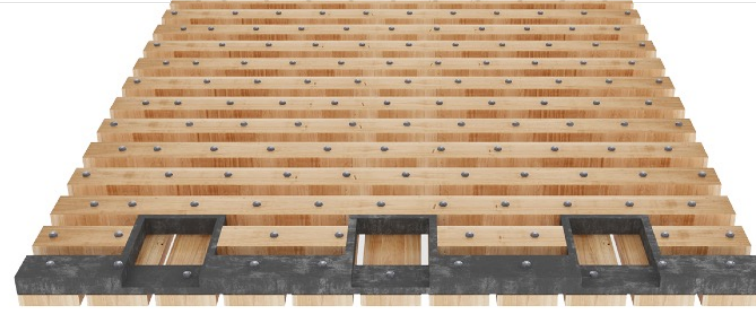

PATENT PENDING

CRANE MAT

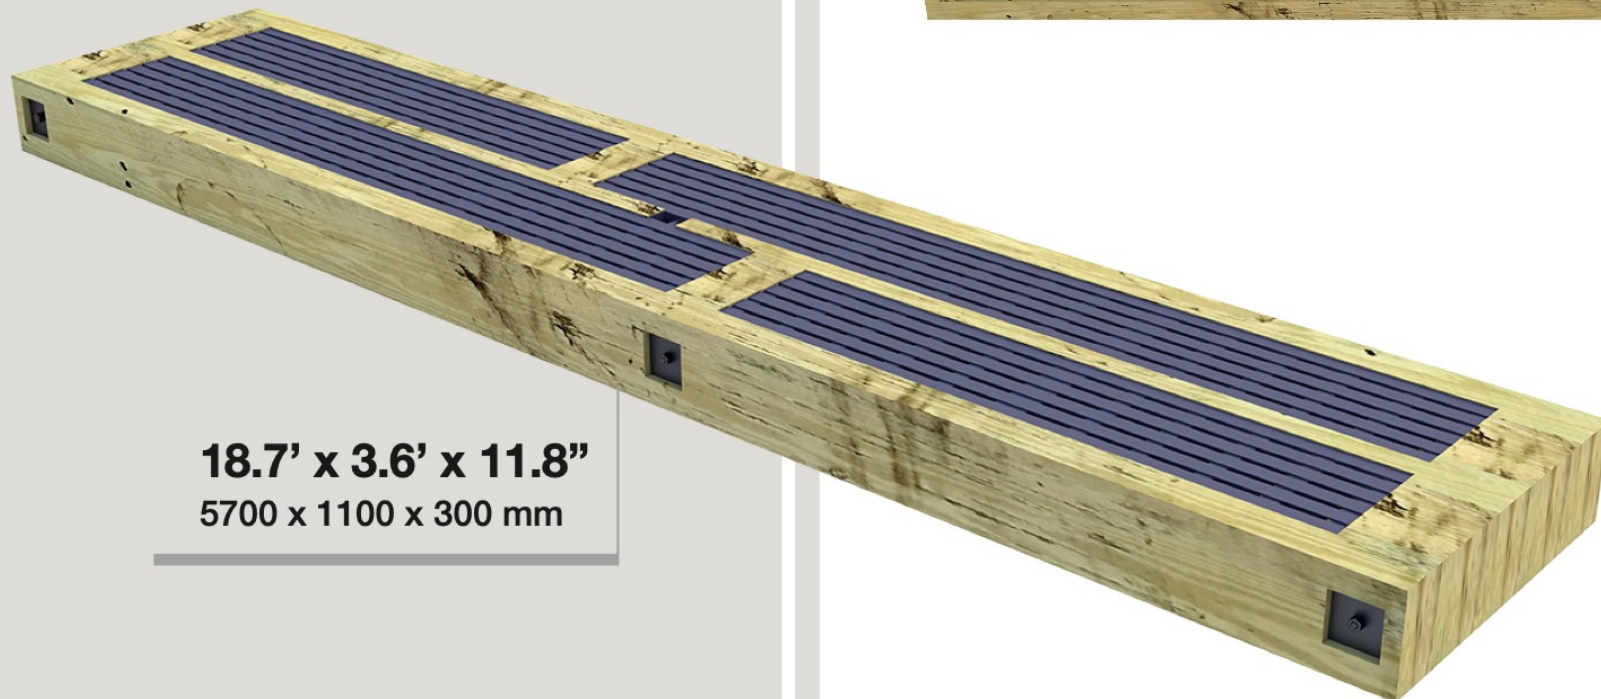

18.7' x 3.6' x 11.8"
5700 x 1100 x 300 mm



Indonesia

Indonesia Client Nov 2020

- Bill of Lading

BILL OF LADING

Shipper
BWG MAI CHAU JOINT STOCK COMPANY
CHIENG CHAU INDUSTRIAL CLUSTER, MAI CHAU
DISTRICT, HOA BINH PROVINCE, VIETNAM
MS PHUONG ANH - MOBILE NO: 02186553485
TAX ID: 5400454416 / HS CODE: N/A

Consignee (If 'To Order' so indicate)
PT. PROFAB INDONESIA
ADD: JL. BAWAL . KAV. V, BATU MERAH, BATU
AMPAR
BATAM, KEPULAUAN RIAU - 29432
TEL : +62 778 413 250/ATTN : MR. MASRONI

Notify Party (No claim shall attach for failure to notify)
AGILITY SHIPPING PTE LTD
ADD: 5 Changi North Way Level 5 SINGAPORE
498771
TEL : +65 6500 0663
ATTN : MS. KAREN

Place of receipt
HAIPHONG, VIETNAM

Vessel 0191-3428
UNI-PRUDENT

Port of loading
HAIPHONG, VIETNAM

Port of discharge
SINGAPORE, SINGAPORE

Place of delivery
SINGAPORE, SINGAPORE

| Marks and numbers | Number and kind of packages | Description of goods | Gross weight | Measurement |
|-------------------|-----------------------------|----------------------------------------------------------------------------------|-------------------|---------------|
| | 32 PIECES | 01X20' GP CONTAINER S.T.C. : Laminated veneer bamboo mats (3900x2200x60mm) | 16,640.000 KGS | 16.400 CBM |

Bill of Lading No.: PS0442SIN

CIFF GLOBAL LIMITED

AS THE CARRIER

9/F., THE WAVE, 4 Hing Yip Street, Kwun Tong,
Kowloon, Hong Kong

CIFF REF NO: PSE20110216

JURISDICTION AND LAW CLAUSE

The contract evidenced by this bill of lading is governed by the law of the Hong Kong
Special Administrative Region and any claim or dispute arising hereunder or in connection
herewith shall be determined exclusively by the courts in the Hong Kong Special
Administrative Region and no other court.

SURRENDERED

| CONTAINER NO. | SEAL NO. | SIZE | MOVEMENT | PKG UNIT | KGS | CBM |
|---------------|------------|------|---------------|-----------|------------|--------|
| EGHU3872015 | EMCGUW0930 | 20GP | FCL/FCL-CY/CY | 32 PIECES | 16,640.000 | 16.400 |

SHIPPED ON BOARD : 14 NOV, 2020
TOTAL: ONE 20' CONTAINER(S) ONLY.

The above particulars of the goods are according to the declaration of the shipper, and are unknown to the Carrier.

RECEIVED by the Carrier the Goods as specified above in apparent good order and
condition unless otherwise stated, to be transported to such place as agreed, authorised
or permitted herein and subject to all the terms and conditions appearing on the front
and reverse pages of this Bill of Lading to which the Merchant agrees by accepting this
Bill of Lading, any local privileges and customs notwithstanding.

The particulars given above are according to the declaration of the Shipper and the
weight, measure, quantity, condition, contents and value of the Goods are unknown to
the Carrier.

Excess Limit Declaration: Refer to Clause 15 on reverse page

One (1) original Bill of Lading must be surrendered duly endorsed in exchange for the
goods or delivery order. In WITNESS whereof one (1) original Bill of Lading has
been signed if not otherwise stated below, the same being accomplished,
the other(s), if any, to be void.

Freight amount
FREIGHT PREPAID AS ARRANGED

Freight payable at
HAIPHONG, VIETNAM

Place and date of issue 14 NOV, 2020
HAIPHONG, VIETNAM

Cargo insurance through the undersigned
☒ not covered ☐ Covered according to attached Policy

Number of Original Bill of Lading
THREE (03)



Stamp / signature of the Carrier or its agent

For delivery of goods please apply to:
I-BE SHIPPING INTERNATIONAL PTE LTD
21 BUKIT BATOK CRESCENT # 16-79 WCEGA TOWER SINGAPORE
658065 REG:201533797W

Indonesia

Indonesia Client Nov 2020

- Phytosanitary Certificate

| | | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------|
| BỘ NÔNG NGHIỆP & PHÁT TRIỂN NÔNG THÔN MINISTRY OF AGRICULTURE & RURAL DEVELOPMENT CỤC BẢO VỆ THỰC VẬT PLANT PROTECTION DEPARTMENT | | CỘNG HÒA XÃ HỘI CHỦ NGHĨA VIỆT NAM SOCIALIST REPUBLIC OF VIETNAM Độc lập - Tự do - Hạnh phúc INDEPENDENCE - FREEDOM - HAPPINESS | |  |
| GIẤY CHỨNG NHẬN KIỂM DỊCH THỰC VẬT PHYTOSANITARY CERTIFICATE | | | | ORIGINAL Số (No) 17468/20/0501 |
| Gửi: Cơ quan Bảo vệ thực vật nước TO: THE PLANT PROTECTION ORGANIZATION(S) OF SINGAPORE | | | | |
| DIỄN GIẢI VỀ LÔ HÀNG (DESCRIPTION OF CONSIGNMENT) | | | | |
| 1. Tên và địa chỉ người xuất khẩu: NAME AND ADDRESS OF THE EXPORTER: BWG MAI CHAU JSC., CHIENG CHAU INDUSTRIAL CLUSTER, CHIENG CHAU COMMUNE, MAI CHAU DISTRICT, HOA BÌNH PROVINCE, VIETNAM TEL: 0969970802 | | 5. Nơi sản xuất: SOCIALIST REPUBLIC OF VIETNAM PLACE OF ORIGIN: | | |
| 2. Tên và địa chỉ người nhận: DECLARED NAME AND ADDRESS OF THE CONSIGNEE: PT. PROFAB INDONESIA JL. BAWAL. KAV. V, BATU MERAH, BATU AMPAR BATAM, KEPULAUAN RIAU-29432 TEL: +62778413250 | | 6. Phương tiện chuyên chở: DECLARED MEANS OF CONVEYANCE: BY SEA; UNI-PRUDENT 0191-3425 | | |
| 3. Số lượng và loại bao bì: NUMBER AND DESCRIPTION OF PACKAGES: 32 PIECES | | 7. Cửa khẩu nhập: DECLARED POINT OF ENTRY: SINGAPORE, SINGAPORE | | |
| 4. Ký, mã hiệu: DISTINGUISHING MARKS: NIL | | 8. Tên và khối lượng sản phẩm: NAME OF PRODUCE AND QUANTITY DECLARED: LAMINATED VENEER BAMBOO G.W: 16,640.00 KGS ONLY. | | |
| | | 9. Tên khoa học của thực vật: BOTANICAL NAME OF PLANTS: Bambusa sp. | | |
| Nay chứng nhận rằng thực vật, sản phẩm thực vật hoặc vật thể thuộc diện kiểm dịch thực vật khác nêu trên đã được kiểm tra và/hoặc thử nghiệm theo quy trình thích hợp và được coi là không có đối tượng kiểm dịch thực vật của nước nhập khẩu cũng như phù hợp với yêu cầu kiểm dịch thực vật hiện hành của nước nhập khẩu. This is to certify that the plants, plant products or other regulated articles described herein have been inspected and/or tested according to appropriate official procedures and are considered to be free from the quarantine pests, specified by the importing contracting party and to conform with the current phytosanitary requirements of the importing contracting party. | | | | |
| KHAI BÁO BỔ SUNG (ADDITIONAL DECLARATION) NIL | | | | |
| XỬ LÝ (DISINFESTATION AND / OR DISINFECTION TREATMENT) | | | | |
| 10. Ngày (DATE): NIL | 12. Tên thuốc (hoạt chất) CHEMICAL (active ingredient): NIL | 14. Thời gian và nhiệt độ: DURATION AND TEMPERATURE: NIL | | |
| 11. Phương pháp xử lý (TREATMENT): NIL | 13. Nồng độ (CONCENTRATION): NIL | 15. Thông tin thêm (ADDITIONAL INFORMATION): NIL | | |
| 16. Dấu của cơ quan STAMP OF ORGANIZATION  | 17. Nơi cấp giấy: PLACE OF ISSUE: HA NOI 18. Ngày cấp: DATE ISSUED: NOV 14 2020 | 19. Tên, chữ ký của cán bộ Kiểm dịch thực vật có thẩm quyền NAME AND SIGNATURE OF AUTHORIZED OFFICER NGUYEN THANH YEN DIRECTOR | | |
| Cục Bảo vệ thực vật hoặc viên chức Kiểm dịch thực vật của Việt Nam không có trách nhiệm nào về mặt tài chính liên quan đến giấy chứng nhận này. No financial liability with respect to this certificate shall attach to Plant Protection Department of Vietnam or to any of its officers or representatives). | | | | |

Indonesia

Indonesia Client Nov 2020

- Fumigation Certificate

| | | | |
|-------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | | TERMITE CONTROL AND FUMIGATION COMPANY HANOI BRANCH | |
| | | Address: Lane 2, No 33 Vương Thừa Vũ Str., Thanh Xuân Dist., Hanoi, Vietnam Tel: (84.24) 35655 768 - 35681 292 - Fax: 35655 767 Website: www.tcfchanoi.com.vn * Email: tcfchn33@gmail.com | |
|  | | FUMIGATION CERTIFICATE | |
| No.8639.20 – HN/TCFC | | LICENCE No. : 05/PPD - Plant Protection Department MINISTRY OF AGRICULTURE AND RURAL DEVELOPMENT | |
| We hereby certify that the cargo with following details: | | | |
| ➤ B/L No.: | | PS0442SIN | |
| ➤ Shipper: | | BWG MAI CHAU JOINT STOCK COMPANY CHIENG CHAU INDUSTRIAL CLUSTER, MAI CHAU DISTRICT, HOA BINH PROVINCE, VIETNAM MS PHUONG ANH - MOBILE NO: 02186553485 TAX ID: 5400454416 / HS CODE: N/A PT. PROFAB INDONESIA ADD: JL. BAWAL . KAV. V, BATU MERAH, BATU AMPAR BATAM, KEPULAUAN RIAU - 29432 TEL : +62 778 413 250/ATTN : MR. MASRONI | |
| ➤ Consignee: | | AGILITY SHIPPING PTE LTD ADD: 5 Changi North Way Level 5 SINGAPORE 498771 TEL : +65 6500 0663 ATTN : MS. KAREN | |
| ➤ Notify Party: | | Laminated veneer bamboo mats (3900x2200x60mm) | |
| ➤ Name of the commodity: | | 01X20' GP CONTAINER S.T.C.: 32 PIECES G.W: 16,640.00 KGS | |
| ➤ Quantity: | | EGHU3872015/EMCGUW0930 | |
| ➤ Weight: | | UNI-PRUDENT 0191-342S | |
| ➤ Container/Seal No.: | | HAIPHONG, VIETNAM | |
| ➤ Vessel/ Voy.No: | | SINGAPORE, SINGAPORE | |
| ➤ Port Of Loading: | | Has been fumigated with: METHYL BROMIDE (CH ₃ Br) 48GRS/ CBM 24 HOURS HA NOI NOV. 12, 2020 | |
| ➤ Port of Discharge: | | | |
| ➤ Fumigant: | | | |
| ➤ Dosage: | | | |
| ➤ Duration of exposure: | | | |
| ➤ Place of fumigation: | | | |
| ➤ Date fumigated: | | | |
| | | HANOI DATE NOV. 14, 2020 FOR DIRECTOR  PHÓ GIÁM ĐỐC Trần Thị Lành | |



PT. KAMEL ENERGI SERVICE

Petroleum & Energy Services



// HYDRAULIC HOSE

// WIRE BRAID

// FLEXOPAK PLT



Tube: oil resistant synthetic rubber.
Reinforcement: one high tensile steel braid.
Cover: abrasion, ozone and hydrocarbon resistant synthetic rubber.
Application: medium pressure hydraulic lines, fuel oil, antifreeze solutions, air and water. Specially designed for hydraulic pilot lines.
Constant operation: -40 °C +100 °C (-40 °F +212 °F)
air max T = +70 °C (+160 °F)
Length: random

| Item Code | Dash | | | mm | | | in | | Mpa | psi | Mpa | | psi | mm | | in | kg/m | lb/ft |
|-----------|------|------|-------|-------|------|------|------|------|------|------|------|-------|------|----|--|----|------|-------|
| | | | | | | | | | | | | | | | | | | |
| 1000274 | 03 | 5.0 | 3/16" | 9.60 | 0.38 | 12.0 | 1750 | 48.0 | 7000 | 20.0 | 0.79 | 0.111 | 0.08 | | | | | |
| 1000097 | 04 | 6.0 | 1/4" | 11.40 | 0.45 | 12.0 | 1750 | 48.0 | 7000 | 30.0 | 1.16 | 0.150 | 0.11 | | | | | |
| 1000475 | 05 | 8.0 | 5/16" | 13.00 | 0.51 | 12.0 | 1750 | 48.0 | 7000 | 40.0 | 1.57 | 0.180 | 0.13 | | | | | |
| 1000476 | 06 | 10.0 | 3/8" | 14.70 | 0.58 | 12.0 | 1750 | 48.0 | 7000 | 60.0 | 2.36 | 0.220 | 0.15 | | | | | |
| 1000347 | 08 | 13.0 | 1/2" | 17.80 | 0.70 | 12.0 | 1750 | 48.0 | 7000 | 80.0 | 3.15 | 0.230 | 0.16 | | | | | |

// HIGH TEMPERATURE


// R5 EVOLUTION HT 150



HIGH TEMPERATURE SAE 100 R5

Tube: oil resistant synthetic rubber.
Reinforcement: one high tensile steel braid.
Cover: braided high tensile textile blue cord.
Application: medium pressure hydraulic lines, fuel oil, antifreeze solutions, air and water. Specially designed for high temperature applications.
Constant operation: -40 °C +150 °C (-40 °F +300 °F)
air max T = +85 °C (+185 °F) up to 5/8", +110 °C (+230 °F) over 3/4"
Safety factor: 1:4
Length: random up to 5/8" - 61 m max over 3/4"

| Item Code | Dash | | | mm | | | in | | Mpa | psi | Mpa | | psi | mm | | in | kg/m | lb/ft |
|-----------|------|------|----------|-------|------|------|------|------|-------|-------|-------|-------|------|----|--|----|------|-------|
| | | | | | | | | | | | | | | | | | | |
| 1004577 | 04 | 5.0 | 3/16" | 13.50 | 0.53 | 21.0 | 3000 | 84.0 | 12000 | 75.0 | 2.95 | 0.355 | 0.24 | | | | | |
| 1004578 | 05 | 6.3 | 1/4" | 15.10 | 0.59 | 21.0 | 3000 | 84.0 | 12000 | 85.0 | 3.35 | 0.382 | 0.26 | | | | | |
| 1004579 | 06 | 8.0 | 5/16" | 17.30 | 0.68 | 15.7 | 2270 | 62.8 | 9080 | 100.0 | 3.94 | 0.501 | 0.34 | | | | | |
| 1004580 | 07 | 10.3 | 13/32" | 19.70 | 0.78 | 14.0 | 2000 | 56.0 | 8000 | 115.0 | 4.53 | 0.586 | 0.40 | | | | | |
| 1004581 | 10 | 12.5 | 1/2" | 23.50 | 0.93 | 12.2 | 1760 | 48.8 | 7000 | 140.0 | 5.51 | 0.752 | 0.51 | | | | | |
| 1004582 | 12 | 16.0 | 5/8" | 27.40 | 1.08 | 10.5 | 1530 | 42.0 | 6000 | 165.0 | 6.50 | 0.871 | 0.59 | | | | | |
| 1004583 | 16 | 22.0 | 7/8" | 31.40 | 1.24 | 5.6 | 800 | 22.4 | 3250 | 185.0 | 7.28 | 0.706 | 0.48 | | | | | |
| 1004585 | 20 | 29.0 | 1 1/8" | 37.60 | 1.48 | 4.3 | 625 | 17.2 | 2500 | 229.0 | 9.02 | 0.924 | 0.63 | | | | | |
| 1004586 | 24 | 35.0 | 1 3/8" | 44.00 | 1.73 | 3.5 | 525 | 14.0 | 2000 | 265.0 | 10.43 | 1.055 | 0.71 | | | | | |
| 1004587 | 32 | 46.0 | 1 13/16" | 56.40 | 2.22 | 2.4 | 350 | 9.6 | 1400 | 335.0 | 13.19 | 1.431 | 0.97 | | | | | |

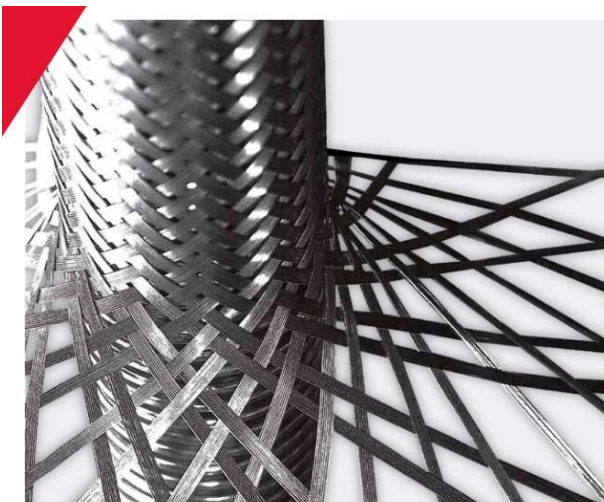

// HOSE



Hose: AISI 316L-DIN 1.4404-Z2CN17-12
Braid: AISI 304-DIN 1.4301-Z6CN18-09
Safety factor: 4:1
Temperature: -270 °C +700 °C

Tolerances: ± 0.2 mm: DN 6 ÷ DN 32
± 0.3 mm: DN 40 ÷ DN 200

| Item Code | Part Number | without braid | | | with 1 braid | | | bar | dynamic | static | kg/m |
|-----------|----------------|---------------|-------|-------|--------------|-------|-----|------|---------|--------|------|
| | | DN | mm | inch | mm | inch | mm | | | | |
| 2600361 | 99CMM006110000 | 6 | 6.2 | 1/4 | 9.6 | 10.7 | 120 | 85 | 25 | 0.149 | |
| 2600335 | 99CMM008130000 | 8 | 8.2 | 5/16 | 12.1 | 13.5 | 100 | 125 | 32 | 0.166 | |
| 2600401 | 99CMM010180000 | 10 | 10.3 | 3/8 | 14.3 | 15.5 | 90 | 140 | 38 | 0.214 | |
| 2600402 | 99CMM013210000 | 12 | 12.2 | 1/2 | 16.7 | 18.0 | 80 | 140 | 45 | 0.240 | |
| 2600362 | 99CMM016230000 | 16 | 16.2 | 5/8 | 21.6 | 23.0 | 70 | 160 | 58 | 0.400 | |
| 2600403 | 99CMM020300000 | 20 | 20.2 | 3/4 | 26.8 | 28.3 | 64 | 170 | 70 | 0.484 | |
| 2600404 | 99CMM023360000 | 25 | 25.4 | 1 | 32.2 | 33.5 | 50 | 190 | 85 | 0.628 | |
| 2600363 | 99CMM032430000 | 32 | 34.3 | 1 1/4 | 41.1 | 42.8 | 40 | 260 | 105 | 0.847 | |
| 2600405 | 99CMM038540000 | 40 | 40.1 | 1 1/2 | 49.5 | 51.5 | 35 | 300 | 130 | 1.172 | |
| 2600406 | 99CMM051680000 | 50 | 50.3 | 2 | 60.3 | 62.5 | 30 | 320 | 160 | 1.606 | |
| 2600407 | 99CMM063880000 | 65 | 65.6 | 2 1/2 | 81.0 | 83.0 | 24 | 410 | 180 | 1.984 | |
| 2600408 | 99CMM075000000 | 80 | 80.3 | 3 | 95.0 | 97.0 | 18 | 450 | 200 | 2.154 | |
| 2600409 | 99CMM100000000 | 100 | 100.8 | 4 | 117.0 | 119.0 | 16 | 560 | 290 | 3.001 | |
| 2600364 | 99CMM125530000 | 125 | 125.4 | 5 | 150.0 | 152.5 | 14 | 710 | 325 | 4.887 | |
| 2600365 | 99CMM150780000 | 150 | 150.8 | 6 | 175.0 | 177.5 | 10 | 815 | 380 | 5.705 | |
| 2600336 | 99CMM200280000 | 200 | 197.0 | 8 | 225.0 | 228.0 | 8 | 1015 | 500 | 9.150 | |

All these data are based for a temperature of 20°C.




PT. KHAMEL ENERGI SERVICE
Petroleum & Energy Services

VALVE

PROVIDING THE BEST SOLUTIONS

Manufacture for custom make, corrosion resistance service Alloy and Duplex Valve for the Oil and Gas service, Chemical Industry, Port, Defence as well as Power projects

Our extensive experience, deep technical and materials know-how mean you can depend on us to deliver the valve solutions you need, when you need them

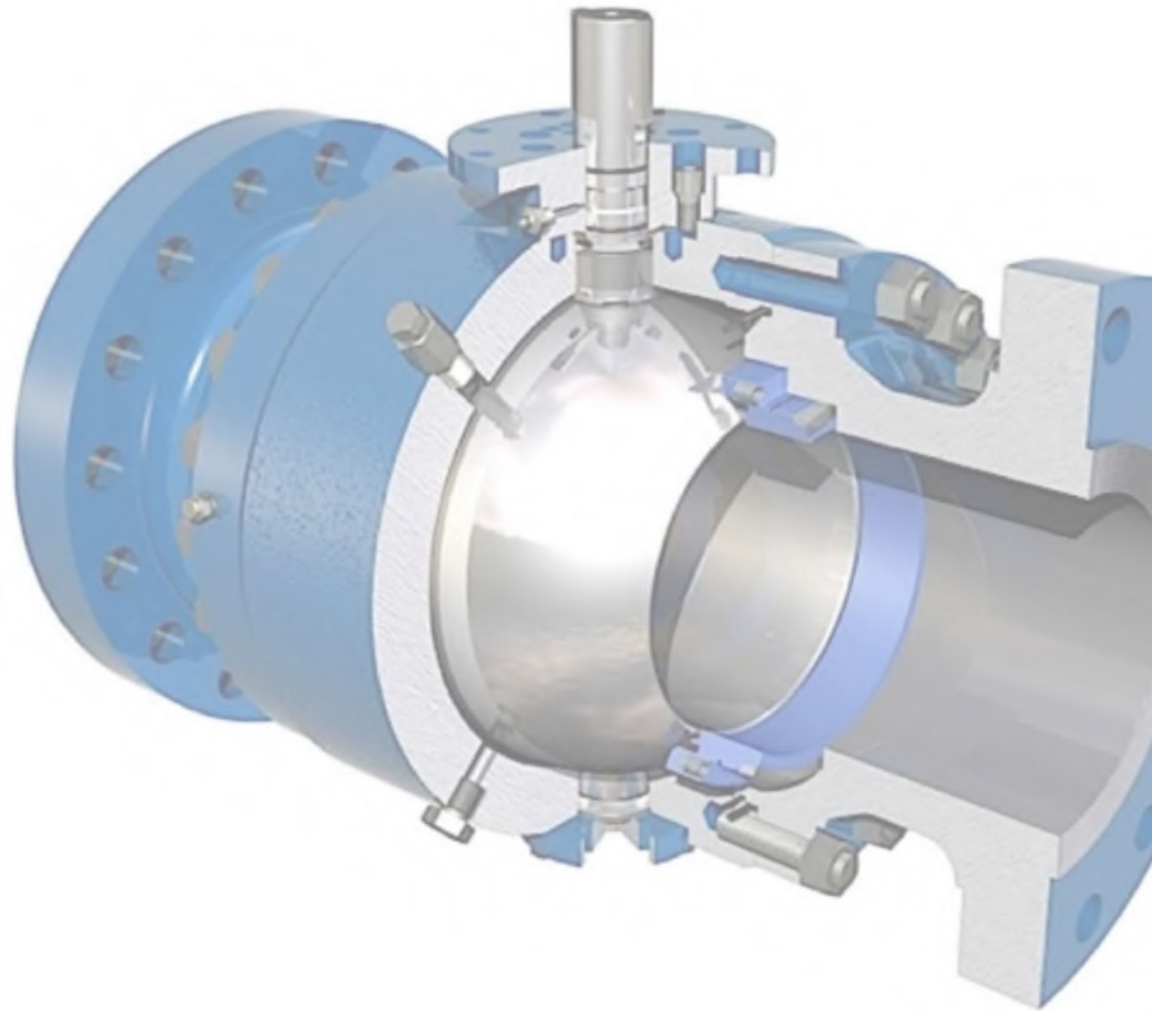



GLOBE VALVE

NSI/ ASME FLANGED GLOBE VALVE
Design standard: ASME B16.34
Pressure-temperature rating: ASME B16.34
Face to face: ASME B16.10
Model: J41H, J40Y, J41W etc..
Test standard: API 598
Nominal size : 1/2"-20"
Pressure: 150LB-2500LB
Drive method: Manual, gear transmission, pneumatic, electric.



BALL VALVE

Material: WCB, A105, LF2, CF8M, CF8, LCC, etc.
Pressure from class 150 to class 2500.
End connections by RF/RTJ/butt-weld, socked and threaded.
Designed and tested to API 598/6D, 3-piece and 2-piece bolted body design.
Fire safe to API-607 and anti-static.
ISO mounting pad and NACE MR-01-75.
Lifting lugs and support stands,
With drain valve, release valve and emergency sealant injection system
Double block and bleed.
Size of 1/4 inch to 24 inch



GATE VALVE

Valve Size: 2"- 20".
Pressure Rating: Class 150~Class 2500
Material: WCB, LCB, WC1, WC6, WC9, C5, CF3, CF3M, CF8, CF8M and other Alloy.
Design & Manufacture: BS EN 1868, API 6D
Face to Face Dimension: ANSI B16.10
Flange Ends Dimension: ANSI B16.5
Test & Inspection: API 598
End: RF, RTJ, BW



CHECK VALVE

Technical specifications
Size: NPS 2"-20"
Pressure: Class 150LBS-1500LBS
Body Material: WCB, LCB, WC6, WC9, C12, C5, CF8, CF3, CF3M, CF8M, etc
Basic Standard:
Design & Manufacture Std.: API 6D, BS 1868, ASME B16.34
Face to Face Std.: API 6D, ASME B16.10
End Connection Std.: ASME B16.5, ASME B16.47, ASME B16.25
Test Standard: ISO 5208, API 598, API 6D



BUTTERFLY VALVE


Design: API 609 / BS EN 593
Design: API 609, Tested: API 598
Metal Seated: Up to 28"
Flange: ASME 16.5 / B16.47
Wall & Pressure / Temp: ASME B16.34
Weldin End Dimension: ASTM 16.25 ANSI & DIN, in Body: WCB, WCC, SS...etc

OUR KEY CLIENT



Our core values are Customer focus and Customer Excellence, our business values are also to enhance and better, manage values keeping the best service for the clients. We work with many clients worldwide to provide niche solutions, to provide better drilling tolls/equipment at most affordable or friendly financial options



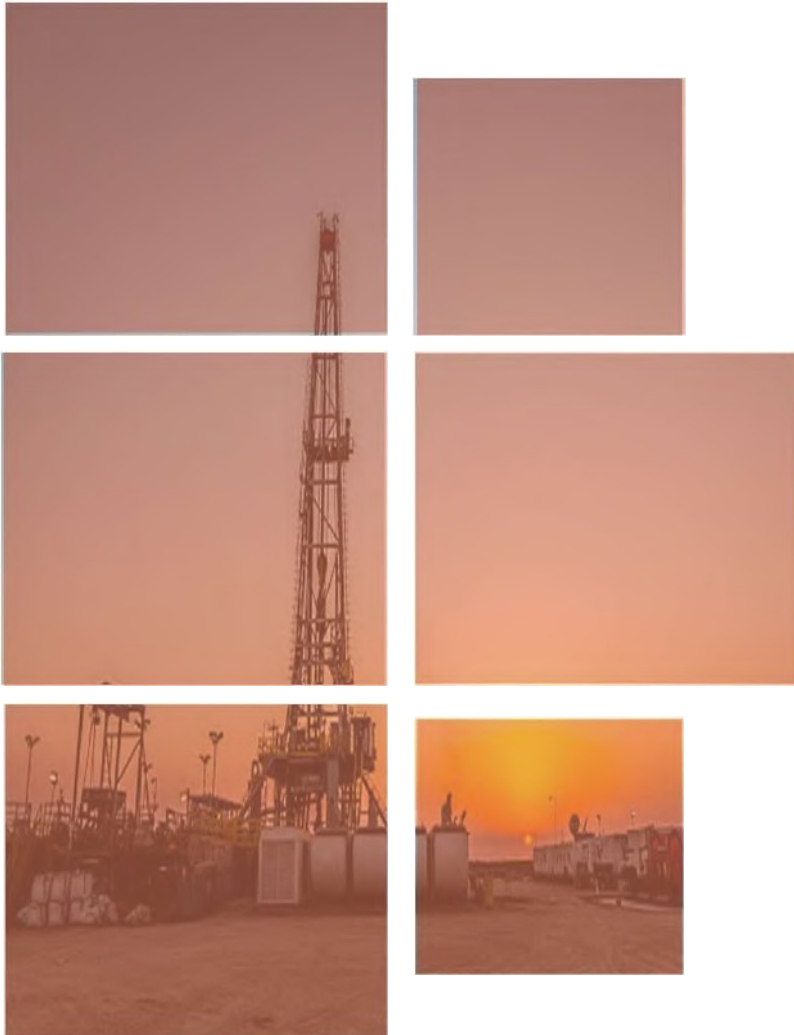

THANK YOU



(62)713 390 111

Siswanto
Director



(62)713 390 112

(62)811 6800 111



admint@khamelenergi.co.id

Siswanto@khamelenergi.co.id



Talang Baru, Pendopo
TI Ubi Barat, Talang Ubi, Pali, South
Sumatera 32111

Menara 165, Floor 4th
Jalan TB. Simatupang Kav 1
Jakarta Selatan, 125659



www.khamelenergi.co.id



PT. KAMEL ENERGI SERVICE
Petroleum & Energy Services