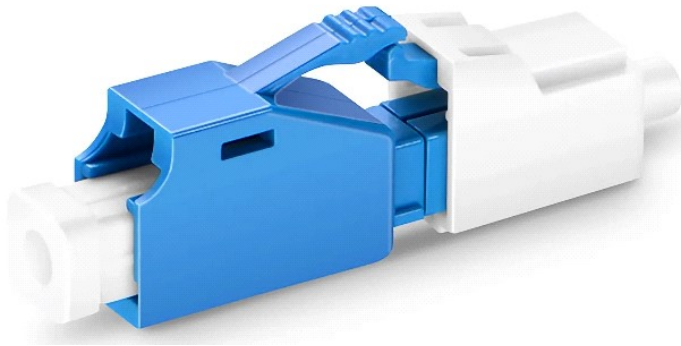


Customized LC Fixed Fiber Optic Attenuator, SM, Male-Female, 1~25dB Optional**Product Highlights**

- Standard Fixed Attenuation Values of 1dB up to 25dB
- Applied for CWDM, DWDM, Test Equipment, CATV Systems, Point to Point Systems, etc.
- Attenuating Material-ion Doped Fiber
- 1260 to 1620nm Wavelength Single mode Attenuators
- Precision Polishing for Reduced Back Reflection
- High Precision Fiber Optic Ceramic Ferrules
- Snap in Body for Fast Mating and Demating

Technical Data

Fiber Connector	LC
Ferrule Type	Zirconia Ceramic
Connector Gender	Fixed Male to Female
Transfer Mode	SMF
Attenuation	1~25dB
Operating Wavelength(nm)	1260~1620
Attenuation Accuracy	1-9dB±0.5dB, 10-25dB±10%
Return Loss	UPC≥50dB, APC≥60dB
Polarization Dependent Loss	≤0.2dB
Max Optical Input Power	200mW
Humidity	95%RH
Operating Temperature Range	-25 to 70°C (-13 to 158°F)
Storage Temperature Range	-40 to 85°C (-40 to 185°F)
Quantity	1pc/pack